

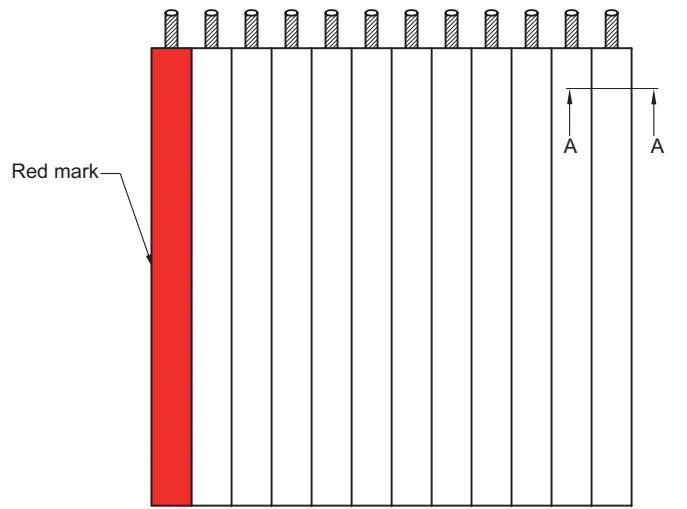


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/22/20'		
B	DRAWING UPDATE	JLZ 07/21/20'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

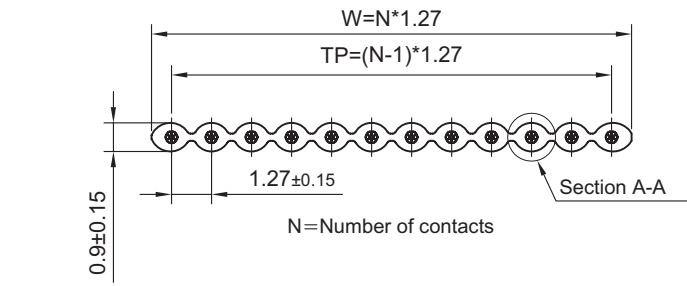

- NOTES:
- Insulation material: PVC
Color: Grey
 - SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28AWG.
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature:-20°C~70°C.
 - Peak temperature :105°C of 168 hours test time.
 - APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.
 - UL2651
 - Fire retardant acc. to UL1581 VW-1

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
06	6.35	7.62	±0.30	∅0.127<0.237
08	8.89	10.16	±0.30	
10	11.43	12.70	±0.30	
14	16.51	17.78	±0.30	
16	19.05	20.32	±0.30	
20	24.13	25.40	±0.30	
24	29.21	30.48	±0.30	
26	31.75	33.02	±0.30	
30	36.83	38.10	±0.30	
34	41.91	43.18	±0.40	
40	49.53	50.80	±0.40	
50	62.23	63.50	±0.40	
60	74.93	76.20	±0.40	
64	80.01	81.28	±0.40	

Product Number Code
DS1057 - X X X X X-X

- Packing Specifications
 - 30.5: 30.5m/reel(100ft)
 - 76.5: 76.5m/reel(250ft)
 - 153.0: 153m/reel(500ft)
 - (153m option that only 10,14,16,20,26,34 and 40pin are available)
 - 459.0: 459m/reel(1500ft)
 - (459m option that only 6,8,10 and 12pin are available)
- Edge mark
R:Red mark
- Wire diameter
2: ∅0.127 (28AWG)
- Wire AWG
28: 28AWG
- Cable color
A: Gray
- No.Of positions
06: 6pin
.....
64: 64pin

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2651 GRAY FLAT CABLE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1057 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1057-EVE-B						