



**Model Number**

**OBE12M-R101-S2EP-IO**

Thru-beam sensor  
with fixed cable

**Features**


- Miniature design with versatile mounting options
- IO-link interface for service and process data
- Various frequencies for avoiding mutual interference (cross-talk immunity)
- Extended temperature range -40°C ... 60°C
- High degree of protection IP69K

**Product information**


The R101 series miniature optical sensors are the first devices of their kind to offer an end-to-end solution in a small single standard design — from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation tasks. The entire series enables sensors to communicate via IO-Link. The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor. The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

Release date: 2016-04-18 11:35 Date of issue: 2016-04-18 281009\_eng.xml


**Dimensions**

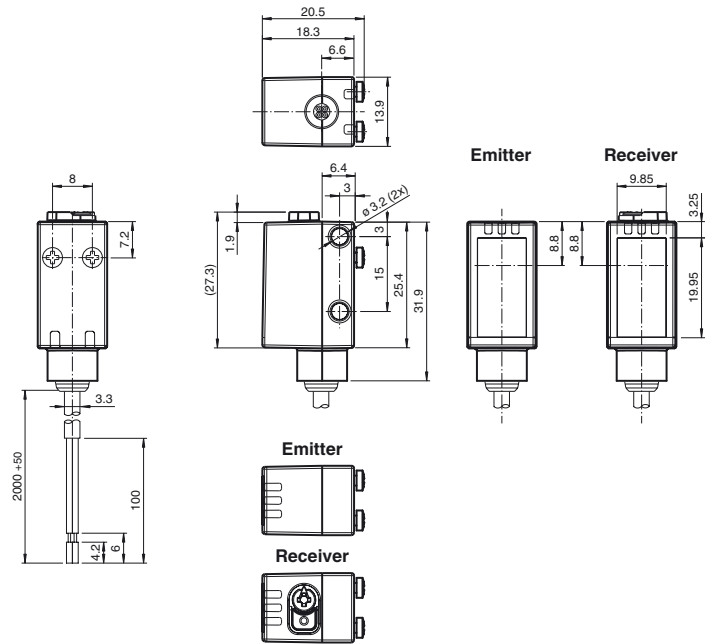

**Electrical connection emitter**

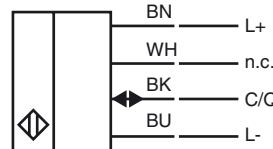


**Electrical connection receiver**

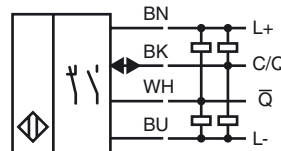


**Indicators/operating means**

**Emitter**



|   |                     |
|---|---------------------|
| 1 | Operating indicator |
|---|---------------------|

**Receiver**



|   |                                    |
|---|------------------------------------|
| 1 | Light-on/dark-on changeover switch |
| 2 | Sensitivity adjuster               |
| 3 | Operating indicator / light on     |
| 4 | Signal indicator                   |
| 5 | Operating indicator / dark on      |

**Technical data****System components**

|          |                    |
|----------|--------------------|
| Emitter  | OBE12M-R101-S-IO   |
| Receiver | OBE12M-R101-2EP-IO |

**General specifications**

|                            |                                    |
|----------------------------|------------------------------------|
| Effective detection range  | 0 ... 12 m                         |
| Threshold detection range  | 15 m                               |
| Light source               | LED                                |
| Light type                 | modulated visible red light        |
| LED risk group labelling   | exempt group                       |
| Diameter of the light spot | approx. 65 mm at a distance of 1 m |
| Angle of divergence        | 3.7 °                              |
| Ambient light limit        | EN 60947-5-2 : 30000 Lux           |

**Functional safety related parameters**

|                                |       |
|--------------------------------|-------|
| MTTF <sub>d</sub>              | 462 a |
| Mission Time (T <sub>M</sub> ) | 20 a  |
| Diagnostic Coverage (DC)       | 0 %   |

**Indicators/operating means**

|                            |   |
|----------------------------|---|
| Operation indicator        | LED green:<br>constantly on - power on<br>flashing (4Hz) - short circuit<br>flashing with short break (1 Hz) - IO-Link mode         |
| Function indicator         | Yellow LED:<br>Permanently lit—light path clear<br>Permanently off—object detected<br>Flashing (4 Hz)—operating reserve not reached |
| Control elements           | Receiver: light/dark switch   |
| Control elements           | Receiver: sensitivity adjustment  |
| Parameterization indicator | IO link communication: green LED goes out briefly (1 Hz)  |

**Electrical specifications**

|                        |                |  |
|------------------------|----------------|--|
| Operating voltage      | U <sub>B</sub> | 10 ... 30 V DC   |
| Ripple                 |                | max. 10 %  |
| No-load supply current | I <sub>0</sub> | Emitter: ≤ 14 mA<br>Receiver: ≤ 13 mA at 24 V supply voltage |
| Protection class       |                | III  |

**Interface**

|                             |  |
|-----------------------------|--|
| Interface type              | IO-Link ( via C/Q = pin 4 )  |
| Transfer rate               | COM 2 (38.4 kBaud)   |
| IO-Link Revision            | 1.1  |
| Min. cycle time             | 2.3 ms   |
| Process data width          | Emitter:<br>Process data output: 2 Bit<br>Receiver:<br>Process data input: 2 Bit<br>Process data output: 2 Bit |
| SIO mode support            | yes  |
| Device ID                   | Emitter: 0x110401 (1115137)<br>Receiver: 0x110301 (1114881)  |
| Compatible master port type | A  |

**Input**

|            |   |
|------------|---|
| Test input | emitter deactivation at +U <sub>B</sub> |
|------------|---|

**Output**

|                     |   |
|---------------------|---|
| Switching type      | The switching type of the sensor is adjustable. The default setting is:<br>C/Q - BK: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link<br>/Q - WH: NPN normally closed / light-on, PNP normally open / dark-on |
| Signal output       | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected  |
| Switching voltage   | max. 30 V DC  |
| Switching current   | max. 100 mA , resistive load  |
| Usage category      | DC-12 and DC-13   |
| Voltage drop        | U <sub>d</sub> ≤ 1.5 V DC   |
| Switching frequency | f 1000 Hz   |
| Response time       | 0.5 ms  |

**Ambient conditions**

|                     |  |
|---------------------|--|
| Ambient temperature | -40 ... 60 °C (-40 ... 140 °F) , fixed cable<br>-25 ... 60 °C (-13 ... 140 °F) , movable cable not appropriate for conveyor chains |
| Storage temperature | -40 ... 70 °C (-40 ... 158 °F)   |

**Mechanical specifications**

|                      |  |
|----------------------|--|
| Degree of protection | IP67 / IP69 / IP69K                          |
| Connection           | 2 m fixed cable                              |
| Material             |  |
| Housing              | PC (Polycarbonate)                           |
| Optical face         | PMMA   |
| Mass                 | Emitter: approx. 10 g receiver: approx. 10 g |

**Accessories****IO-Link-Master02-USB**

IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection

Other suitable accessories can be found at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com)

Cable length 2 m

**Compliance with standards and directives**

**Directive conformity**

EMC Directive 2004/108/EC EN 60947-5-2:2007 + A1:2012

**Standard conformity**



Product standard EN 60947-5-2:2007 + A1:2012  
IEC 60947-5-2:2007 + A1:2012

Standards UL 60947-5-2: 2014  
IEC 61131-9:2013  
EN 62471:2008  
EN 61131-9:2013


**Approvals and certificates**

UL approval E87056 , cULus Listed , class 2 power supply , type rating 1

**Curves/Diagrams**

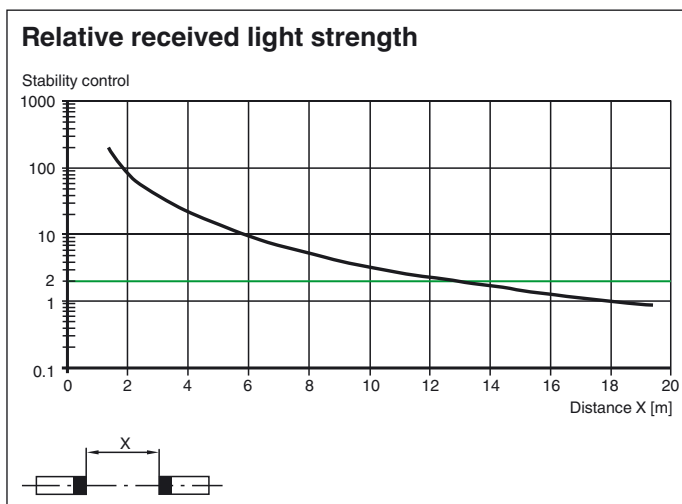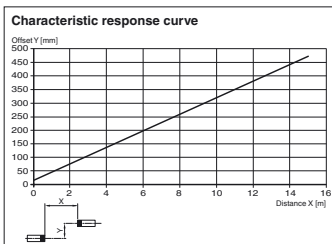

**Functions and Operation**

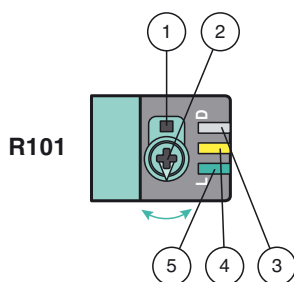

- 1 - Light-on / dark-on changeover switch
- 2 - Sensing range /sensitivity adjuster
- 3 - Operating indicator / dark on
- 4 - Signal indicator
- 5 - Operating indicator / light on

To unlock the adjustment functions turn the sensing range adjuster for more than 180 degrees.

**Sensing Range / Sensitivity**

Turn sensing range / sensivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range /sensitivity adjuster counter clockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

**Light-on / Dark-on Configuration**

Press the light-on / dark-on changeover switch for more than 1 second (less than 4 seconds). The light-on / dark-on mode changes and the operating indicators are activated accordingly.

Release date: 2016-04-18 11:35 Date of issue: 2016-04-18 281009\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

If you press the light-on / dark-on changeover switch for more than 4 seconds, the light-on / dark-on mode changes back to the original setting. On release of the light-on / dark-on changeover switch the current state is activated.

### Restore Factory Settings

Press the light-on / dark-on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light-on / dark-on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory default settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range /sensitivity adjustment, turn the sensing range / sensitivity adjuster for more than 180 degrees.