



## Data sheet | Item number: 2857-570/024-001

3-Phase Power Measurement Module; 3x400/690 V/1 A; Modbus RTU;  
Digital output; Configuration via software; Supply voltage: 24 VDC

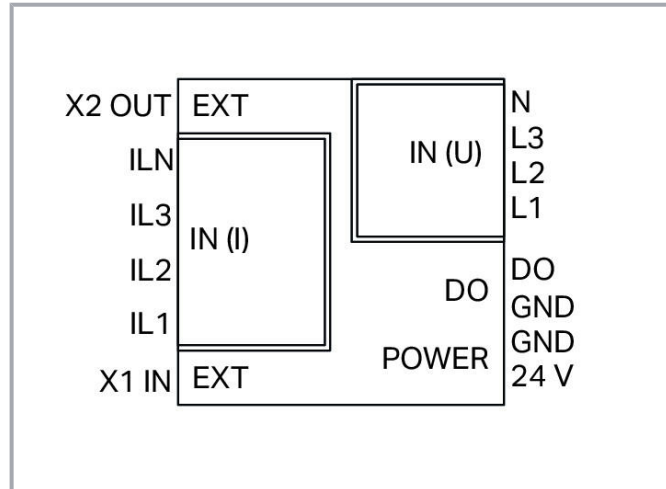

[www.wago.com/2857-570/024-001](http://www.wago.com/2857-570/024-001)

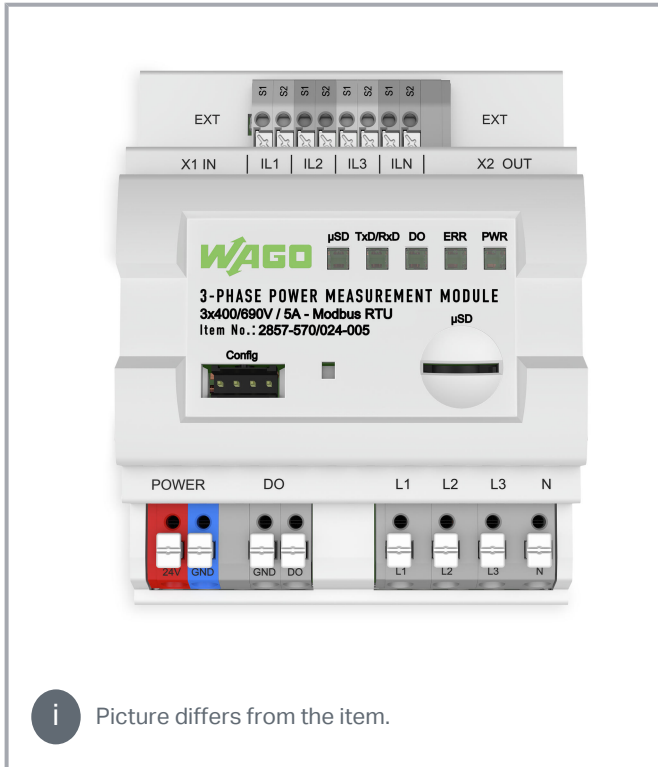

## Item description

### Short description:

WAGO's 3-Phase Power Measurement Module in a DIN-rail-mount enclosure measures electrical data in three-phase supply networks – remotely from the control level.

Measured variables such as active/apparent/reactive power, energy consumption, power factor, phase angle and frequency can be accessed via Modbus<sup>®</sup> interface. In addition, the measured variables can be stored on a microSD card.

### Features:

- Current measurement via 1A current transformer
- Mobile measurement and storage of measured values on microSD card
- Configuration and display of measured values during operation via configuration interface
- Compact device in DIN-rail-mount enclosure saves space used for building technology
- Communication of measured values via Modbus<sup>®</sup> interface
- Configurable digital signal output as pulse output

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Note:**

Additional setting options via the WAGO Interface Configuration Software

**Data****Technical data****Configuration**

Configuration options	WAGO Interface Configuration Software
-----------------------	---------------------------------------

**Input**

Input signal type	Voltage Current
Network configuration	3-phase power measurement with N-conductor (4-conductor) 3-phase power measurement without N-conductor (3-conductor)
Input signal (voltage)	AC 400 V ( $U_{LN}$ ); AC 690 V ( $U_{LL}$ )
Input signal (current)	AC 1 A (Current transformer)
Frequency range	45 ... 65 Hz (Harmonics analysis: 0 ... 3.3 kHz)
Input resistance (current input)	22 m $\Omega$
Input resistance (voltage input)	1.5 M $\Omega$
Input current (max.)	1 AAC
Input voltage (max.)	400 VAC ( $U_{LN}$ ); 690 VAC ( $U_{LL}$ )
Response threshold	10 mA
Resolution (current)	10 mA

**Output – digital**

Switching voltage (DO) (max.)	Supply voltage (applied)
Continuous current (DO) (max.)	100 mA (no internal restriction)
Configurable functions (DO)	Threshold value switch Pulse output (S0 interface)

**Communication**

Communication	Modbus® RTU
Interface	RS-485 (2-wire) via RJ-45
Number of devices (max.)	32
Addressing	Via Interface configuration software

Subject to changes. Please also observe the further product documentation!



## Signal processing

Measurement method	True RMS measurement (measured value acquisition with 8 kHz)
Measured variables (calculated)	Line-to-line voltage Outputs Energy sources Power factors Mains frequency Harmonics analysis (up to 41st harmonic) Total harmonic distortion (THD)
Signal form	Any periodic signals (considering the threshold frequencies)
Limit frequency	15.9 kHz
Memory card type	WAGO 758-879/000-3102 (microSD; 2 GB)

## Measurement error

Transmission error (max.)	≤ 0.5 % for current and voltage (of the full scale value)
---------------------------	---

## Supply

Power supply type	24 VDC
Nominal supply voltage $U_S$	DC 24 V (SELV)
Supply voltage range	±30 %
Power consumption at nominal supply voltage	≤ 50 mA (+ $I_{D0}$ )

## Safety and protection

Line-to-neutral conductor voltage	AC / DC 600 V
Overvoltage category	III
Pollution degree	2
Safe isolation	Input/supply and communication per EN 61010-1
Requirement (N input)	Shall not be dangerously active
Requirement ( $IL_x$ input)	Coils/converters with basic insulation
Protection type	IP20

## Test voltage

Test voltage (input/output/supply)	AC 3.51 kV; 50 Hz; 1 min
------------------------------------	--------------------------

Subject to changes. Please also observe the further product documentation!

## Connection data

Connection type (1)	Voltage
Connection technology	Push-in CAGE CLAMP®
WAGO Connector	WAGO 804 Series
Solid conductor	0.25 ... 2.5 mm <sup>2</sup> / 20 ... 12 AWG
Fine-stranded conductor	0.25 ... 2.5 mm <sup>2</sup> / 22 ... 12 AWG
Strip length	10 ... 11 mm / 0.39 ... 0.43 inch
Connection type 2	Current/Power supply/DO
Connection technology 2	Push-in CAGE CLAMP®
WAGO Connector 2	WAGO 741 Series
Solid conductor 2	0.2 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG
Fine-stranded conductor 2	0.2 ... 1.5 mm <sup>2</sup> / 24 ... 16 AWG
Strip length 2	9 ... 10 mm / 0.35 ... 0.39 inch
Connection type (3)	Modbus® communication
Pluggable connectors	2 x RJ-45 (daisy chain configuration)

## Physical data

Width	72 mm / 2.835 inch
Height from upper-edge of DIN-rail	55 mm / 2.165 inch
Depth	90 mm / 3.54 inch

## Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

## Material data

Fire load	0.047 MJ
Weight	115.6 g

## Environmental requirements

Surrounding air temperature (operation)	-40 ... 70 °C
Surrounding air temperature (storage)	-40 ... 85 °C
Relative humidity	5 ... 95 % (non-condensing)

Subject to changes. Please also observe the further product documentation!

## Standards and specifications


Conformity marking	CE
EMC immunity to interference	EN 61000-6-2
EMC emission of interference	EN 61000-6-3
Standards/Specifications	EN 61010-1

## Commercial data

PU (SPU)	1 Stück
Packaging type	box
Country of origin	DE
GTIN	4055143827539
Customs tariff number	85437090300



## Approvals / Certificates

### Ship Approvals




Logo	Approval	Additional Approval Text	Certificate name
	<b>DNV GL</b> Det Norske Veritas, Germanischer Lloyd	-	TAA00001ZY

## Optional accessories















### Interface module

	<b>Item no.: 289-175/790-108</b> Interface module; RJ-45; PCB terminal blocks, double-row; Cat. 5; in mounting carrier; with shield connection; with shield clamping saddle	<a href="http://www.wago.com/289-175/790-108">www.wago.com/289-175/790-108</a>
	<b>Item no.: 289-176</b> Interface module; RJ-45; with power jumper contacts; RJ-45; Cat. 5; in mounting carrier	<a href="http://www.wago.com/289-176">www.wago.com/289-176</a>

### General accessories

	<b>Item no.: 2007-8874</b> Compact terminal block; for current and voltage transformers; 6,00 mm <sup>2</sup> ; multicoloured	<a href="http://www.wago.com/2007-8874">www.wago.com/2007-8874</a>
	<b>Item no.: 2007-8877</b> Compact terminal block; for current transformer circuit; 6,00 mm <sup>2</sup> ; multicoloured	<a href="http://www.wago.com/2007-8877">www.wago.com/2007-8877</a>
	<b>Item no.: 855-8001</b> Power tap; with fuse; 2,5 mm <sup>2</sup> (12 AWG) - 6 mm <sup>2</sup> (10 AWG); Phase	<a href="http://www.wago.com/855-8001">www.wago.com/855-8001</a>

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 855-8002</b> Power tap; without fuse; 2,5 mm <sup>2</sup> (12 AWG) - 6 mm <sup>2</sup> (10 AWG); N-conductor	<a href="http://www.wago.com/855-8002">www.wago.com/855-8002</a>
	<b>Item no.: 855-8003</b> Power tap; with fuse; 10 mm <sup>2</sup> (8 AWG) - 16 mm <sup>2</sup> (6 AWG); Phase	<a href="http://www.wago.com/855-8003">www.wago.com/855-8003</a>
	<b>Item no.: 855-8004</b> Power tap; without fuse; 10 mm <sup>2</sup> (8 AWG) - 16 mm <sup>2</sup> (6 AWG); N-conductor	<a href="http://www.wago.com/855-8004">www.wago.com/855-8004</a>
	<b>Item no.: 855-8006</b> Power tap; for busbar; with fuse; Mounting screw M6	<a href="http://www.wago.com/855-8006">www.wago.com/855-8006</a>
	<b>Item no.: 855-8008</b> Power tap; for busbar; with fuse; Mounting screw M8	<a href="http://www.wago.com/855-8008">www.wago.com/855-8008</a>
	<b>Item no.: 855-8015</b> Power tap; for busbar; with fuse; Clamping connection	<a href="http://www.wago.com/855-8015">www.wago.com/855-8015</a>
<b>Memory card</b>		
	<b>Item no.: 758-879/000-3102</b> Memory Card SD Micro; 2 GByte	<a href="http://www.wago.com/758-879/000-3102">www.wago.com/758-879/000-3102</a>
<b>Tool</b>		
	<b>Item no.: 210-720</b> Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured	<a href="http://www.wago.com/210-720">www.wago.com/210-720</a>
<b>Cables and pluggable connectors</b>		
	<b>Item no.: 750-923</b> Configuration cable; USB connector; Length: 2.5 m	<a href="http://www.wago.com/750-923">www.wago.com/750-923</a>
	<b>Item no.: 750-923/000-001</b> Configuration cable; USB connector; Length: 5 m	<a href="http://www.wago.com/750-923/000-001">www.wago.com/750-923/000-001</a>
	<b>Item no.: 750-978/000-011</b> Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief	<a href="http://www.wago.com/750-978/000-011">www.wago.com/750-978/000-011</a>
<b>Current transformers</b>		
	<b>Item no.: 855-1001/2500-1001</b> Plug-in current transformer; Primary rated current: 2500 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-1001/2500-1001">www.wago.com/855-1001/2500-1001</a>
	<b>Item no.: 855-2701/035-001</b> Plug-in current transformer; Primary rated current: 35 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1	<a href="http://www.wago.com/855-2701/035-001">www.wago.com/855-2701/035-001</a>
	<b>Item no.: 855-2701/064-001</b> Plug-in current transformer; Primary rated current: 64 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1	<a href="http://www.wago.com/855-2701/064-001">www.wago.com/855-2701/064-001</a>
	<b>Item no.: 855-3001/060-003</b>	

Subject to changes. Please also observe the further product documentation!

Split-core current transformer; Primary rated current: 60 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 3; Cable length: 3 m [www.wago.com/855-3001/060-003](http://www.wago.com/855-3001/060-003)

**Item no.: 855-3001/100-003**

Split-core current transformer; Primary rated current: 100 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 3; Cable length: 3 m

[www.wago.com/855-3001/100-003](http://www.wago.com/855-3001/100-003)

**Item no.: 855-3001/200-001**

Split-core current transformer; Primary rated current: 200 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m

[www.wago.com/855-3001/200-001](http://www.wago.com/855-3001/200-001)

**Item no.: 855-3001/250-001**

Split-core current transformer; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m

[www.wago.com/855-3001/250-001](http://www.wago.com/855-3001/250-001)

**Item no.: 855-301/050-103**

Plug-in current transformer; Primary rated current: 50 A; Secondary rated current: 1 A; Rated power: 1.25 VA; Accuracy class: 3

[www.wago.com/855-301/050-103](http://www.wago.com/855-301/050-103)

**Item no.: 855-301/060-101**

Plug-in current transformer; Primary rated current: 60 A; Secondary rated current: 1 A; Rated power: 1.25 VA; Accuracy class: 1

[www.wago.com/855-301/060-101](http://www.wago.com/855-301/060-101)

**Item no.: 855-301/075-201**

Plug-in current transformer; Primary rated current: 75 A; Secondary rated current: 1 A; Rated power: 2.5 VA; Accuracy class: 1

[www.wago.com/855-301/075-201](http://www.wago.com/855-301/075-201)

**Item no.: 855-301/100-201**

Plug-in current transformer; Primary rated current: 100 A; Secondary rated current: 1 A; Rated power: 2.5 VA; Accuracy class: 1

[www.wago.com/855-301/100-201](http://www.wago.com/855-301/100-201)

**Item no.: 855-301/150-501**

Plug-in current transformer; Primary rated current: 150 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1

[www.wago.com/855-301/150-501](http://www.wago.com/855-301/150-501)

**Item no.: 855-301/200-501**

Plug-in current transformer; Primary rated current: 200 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1

[www.wago.com/855-301/200-501](http://www.wago.com/855-301/200-501)

**Item no.: 855-301/250-501**

Plug-in current transformer; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1

[www.wago.com/855-301/250-501](http://www.wago.com/855-301/250-501)

**Item no.: 855-301/400-1001**

Plug-in current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1

[www.wago.com/855-301/400-1001](http://www.wago.com/855-301/400-1001)

**Item no.: 855-301/600-1001**

Plug-in current transformer; Primary rated current: 600 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1

[www.wago.com/855-301/600-1001](http://www.wago.com/855-301/600-1001)

**Item no.: 855-4001/100-001**

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27














32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

	Split-core current transformer; Primary rated current: 100 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-4001/100-001">www.wago.com/855-4001/100-001</a>
	<b>Item no.: 855-4001/150-001</b> Split-core current transformer; Primary rated current: 150 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-4001/150-001">www.wago.com/855-4001/150-001</a>
	<b>Item no.: 855-4001/200-001</b> Split-core current transformer; Primary rated current: 200 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 0.5; Cable length: 3 m	<a href="http://www.wago.com/855-4001/200-001">www.wago.com/855-4001/200-001</a>
	<b>Item no.: 855-401/250-501</b> Plug-in current transformer; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-401/250-501">www.wago.com/855-401/250-501</a>
	<b>Item no.: 855-401/400-501</b> Plug-in current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-401/400-501">www.wago.com/855-401/400-501</a>
	<b>Item no.: 855-401/600-501</b> Plug-in current transformer; Primary rated current: 600 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-401/600-501">www.wago.com/855-401/600-501</a>
	<b>Item no.: 855-4101/200-001</b> Split-core current transformer; Primary rated current: 200 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-4101/200-001">www.wago.com/855-4101/200-001</a>
	<b>Item no.: 855-4101/250-001</b> Split-core current transformer; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-4101/250-001">www.wago.com/855-4101/250-001</a>
	<b>Item no.: 855-4101/400-001</b> Split-core current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 1; Cable length: 3 m	<a href="http://www.wago.com/855-4101/400-001">www.wago.com/855-4101/400-001</a>
	<b>Item no.: 855-5001/1000-000</b> Split-core current transformer; Primary rated current: 1000 A; Secondary rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 5 m	<a href="http://www.wago.com/855-5001/1000-000">www.wago.com/855-5001/1000-000</a>
	<b>Item no.: 855-5001/250-001</b> Split-core current transformer; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 1; Cable length: 5 m	<a href="http://www.wago.com/855-5001/250-001">www.wago.com/855-5001/250-001</a>
	<b>Item no.: 855-5001/400-000</b> Split-core current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 5 m	<a href="http://www.wago.com/855-5001/400-000">www.wago.com/855-5001/400-000</a>
	<b>Item no.: 855-5001/600-000</b> Split-core current transformer; Primary rated current: 600 A; Secondary rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 5 m	<a href="http://www.wago.com/855-5001/600-000">www.wago.com/855-5001/600-000</a>
	<b>Item no.: 855-501/1000-1001</b>	

Subject to changes. Please also observe the further product documentation!



	Plug-in current transformer; Primary rated current: 1000 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-501/1000-1001">www.wago.com/855-501/1000-1001</a>
	<b>Item no.: 855-501/400-1001</b> Plug-in current transformer; Primary rated current: 400 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-501/400-1001">www.wago.com/855-501/400-1001</a>
	<b>Item no.: 855-501/600-1001</b> Plug-in current transformer; Primary rated current: 600 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-501/600-1001">www.wago.com/855-501/600-1001</a>
	<b>Item no.: 855-501/800-1001</b> Plug-in current transformer; Primary rated current: 800 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-501/800-1001">www.wago.com/855-501/800-1001</a>
	<b>Item no.: 855-5101/1000-000</b> Split-core current transformer; Primary rated current: 1000 A; Secondary rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 0.5; Cable length: 5 m	<a href="http://www.wago.com/855-5101/1000-000">www.wago.com/855-5101/1000-000</a>
	<b>Item no.: 855-601/1500-501</b> Plug-in current transformer; Primary rated current: 1500 A; Secondary rated current: 1 A; Rated power: 5 VA; Accuracy class: 1	<a href="http://www.wago.com/855-601/1500-501">www.wago.com/855-601/1500-501</a>
	<b>Item no.: 855-801/1000-1001</b> Plug-in current transformer; Primary rated current: 1000 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-801/1000-1001">www.wago.com/855-801/1000-1001</a>
	<b>Item no.: 855-801/2000-1001</b> Plug-in current transformer; Primary rated current: 2000 A; Secondary rated current: 1 A; Rated power: 10 VA; Accuracy class: 1	<a href="http://www.wago.com/855-801/2000-1001">www.wago.com/855-801/2000-1001</a>
<b>Potential distribution</b>		
	<b>Item no.: 855-1851/350-000</b> Current and voltage tap up to 185 mm <sup>2</sup> ; Primary rated current: 350 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 0.5; fused	<a href="http://www.wago.com/855-1851/350-000">www.wago.com/855-1851/350-000</a>
	<b>Item no.: 855-501/150-000</b> Current and voltage tap up to 50 mm <sup>2</sup> ; Primary rated current: 150 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 0.5; fused	<a href="http://www.wago.com/855-501/150-000">www.wago.com/855-501/150-000</a>
	<b>Item no.: 855-951/250-000</b> Current and voltage tap up to 95 mm <sup>2</sup> ; Primary rated current: 250 A; Secondary rated current: 1 A; Rated power: 0.2 VA; Accuracy class: 0.5; fused	<a href="http://www.wago.com/855-951/250-000">www.wago.com/855-951/250-000</a>
<b>Power supplies</b>		
	<b>Item no.: 787-2850</b> Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 1.25 A output current	<a href="http://www.wago.com/787-2850">www.wago.com/787-2850</a>

Subject to changes. Please also observe the further product documentation!



## Downloads

### Documentation

#### Manual

3-Phase Power Measurement Module	V 1.0.0	pdf 16.4 MB	Download
----------------------------------	---------	----------------	----------

#### Bid Text

2857-570/024-001 X81 - Datei	15 Jul 2019	xml 8.8 kB	Download
---------------------------------	-------------	---------------	----------

2857-570/024-001 docx - Datei	15 Jul 2019	docx 20.1 kB	Download
----------------------------------	-------------	-----------------	----------

#### Instruction Leaflet

3-Phasen-Leistungsmessmodul	V 1.1.0	pdf 1.2 MB	Download
-----------------------------	---------	---------------	----------

#### Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

## Libraries

### Library

Library for the Wago 3-Phase Powertransducer module 2857-570 WAGO-I/O-PRO Library for 2857-0570/0024-000x 3-Phase Powertransducer modules	1.0.0 28 Feb 2019	zip 2.2 MB	Download
--	----------------------	---------------	----------

## Engineering-Software

### Software for Interface-Products

WAGO Interface Configuration Software G2 SMALL The full setup only includes the WAGO Interface Configuration Software G2.	1.0.6.18 8 Apr 2021	exe 30.0 MB	Download
--	------------------------	----------------	----------

WAGO Interface Configuration Software G2 FULL	1.0.6.18 8 Apr 2021	exe 113.9 MB	Download
---	------------------------	-----------------	----------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

The full setup, in addition to the WAGO Interface Configuration Software G2, includes the installation for the Microsoft .NET Framework.

---

## CAD/CAE-Data

### CAE data

EPLAN Data Portal 2857-570/024-001	<a href="#">URL</a>	<a href="#">Download</a>
------------------------------------	---------------------	--------------------------

---

ZUKEN Portal 2857-570/024-001	<a href="#">URL</a>	<a href="#">Download</a>
-------------------------------	---------------------	--------------------------

---

### CAD data

2D/3D Models 2857-570/024-001	<a href="#">URL</a>	<a href="#">Download</a>
-------------------------------	---------------------	--------------------------

---

## Environmental Product Compliance

### Compliance Search


Environmental Product Compliance 2857-570/024-001	<a href="#">URL</a>	<a href="#">Download</a>
---	---------------------	--------------------------

3-Phase Power Measurement Module; 3x400/690 V/1 A; Modbus RTU; Digital output; Configuration via software; Supply voltage: 24 VDC

---

## Installation Notes

### Configuration

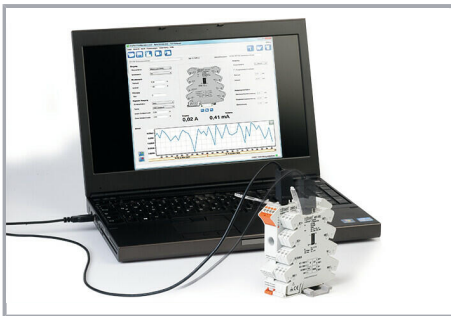

Configuration via WAGO Interface Configuration Software

Subject to changes. Please also observe the further product documentation!

---