



# MASTER PL-T Xtra 4 Pin

MASTER PL-T Xtra 57W/830/4P 1CT

MASTER PL-T Xtra is an efficient compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications demanding higher lighting levels. MASTER PL-T Xtra lamps furthermore provide significantly lower operating costs thanks to their lifetime, which is more than double that of a standard MASTER PL-T lamp, and their very low early failure rate. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

## Product data

### • General Characteristics

Cap-Base	GX24q-5
Cap-Base Information	4P
Life to 50% fail	33000 hr
Preheat EL,3h	
Life to 50% fail	9000 hr
Nonpreh EL,3h	
Life to 10% fail	6000 hr
Nonpreh EL,3h	
Life to 10% fail	20000 hr
Preheat EL,3h	
LSF HF Preheat	90 %
20000h Rated,3h	
LSF HF Preheat	94 %
16000h Rated,3h	
LSF HF Preheat	95 %
12000h Rated,3h	
LSF HF Preheat	96 %
8000h Rated,3h	
LSF HF Preheat	97 %
6000h Rated,3h	
LSF HF Preheat	98 %
4000h Rated,3h	
LSF HF Preheat	99 %
2000h Rated,3h	

### • Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	82 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Chromaticity Coordinate X	434 -

Chromaticity Coordinate Y	397 -
Lum Efficacy Rated HF 25°C	75 Lm/W
LLMF HF 20000h Rated	78 %
LLMF HF 16000h Rated	79 %
LLMF HF 12000h Rated	81 %
LLMF HF 8000h Rated	84 %
LLMF HF 6000h Rated	86 %
LLMF HF 4000h Rated	88 %
LLMF HF 2000h Rated	92 %
Luminous Flux EL 25°C, Rated	4200 Lm
Luminous Flux EL 25°C, Nominal	4300 Lm
Design Temperature	28 C

### • Electrical Characteristics

Lamp Wattage	57 W
Lamp Voltage EL 25°C	175 V
Lamp Current EL 25°C	0.320 A
Dimmable	Yes
Lamp Wattage EL 25°C, Rated	56.0 W
Lamp Wattage EL 25°C, Nominal	57 W



asimpleswitch.com

# PHILIPS

sense and simplicity

# MASTER PL-T Xtra 4 Pin

## • Environmental Characteristics

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content	3.0 mg

## • Measuring Conditions

Calibration Current	0.320 A
HF Generator Rated Voltage	560 V
Resistor	1200 ohm

## • Product Dimensions

Base Face to Base Face A	157.7 (max) mm
Insertion Length B	182.0 (max) mm
Overall Length C	197.7 (max) mm
Diameter D	41.0 (max) mm

## • Product Data



Order code	927912783014
Full product code	927912783014
Full product name	MASTER PL-T Xtra 57W/830/4P 1CT
Order product name	MASTER PL-T Xtra 57W/830/4P 1CT/5X10BOX
Pieces per pack	1
Packing configuration	5X10CC
Packs per outerbox	50
Bar code on pack - EAN1	8711500897527
Bar code on intermediate packing - EAN2	8711500897534
Bar code on outerbox - EAN3	8711500897541
Logistic code(s) - 12NC	927912783014
ILCOS code	FSM6H-57/30/1B-L/P-GX24q=5
Net weight per piece	101.000 gr

## Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear

- Shorter lamp life when often switching and not well pre-heated electrodes


## Dimensional drawing

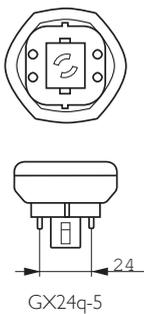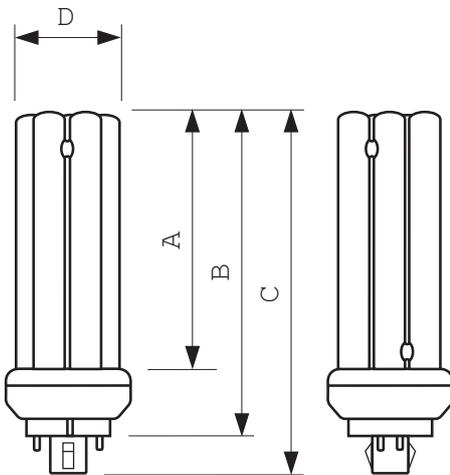

## GX24q-5, 4P

Product	A (Max)	B (Max)	C (Max)	D (Max)
PL-T Xtra 57W/830/4P M	157.7	182.0	197.7	41.0

## Photometric data

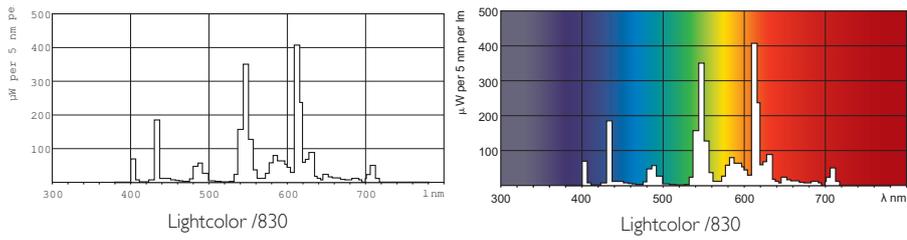

© 2012 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2012, August 4  
data subject to change