SIEMENS

Data sheet

3RW30 46-2BB14



SIRIUS SOFT STARTER, SIZE S3, 80A, 45KW/400V, 40 DEGREES, 200-480V AC, 110-230V AC/DC, SPRING-LOADED TERMINALS

General technical data:	
product brand name	SIRIUS
Product feature	-
 integrated bypass contact system 	Yes
Thyristors	Yes
Product function	
Intrinsic device protection	No
 motor overload protection 	No
 Evaluation of thermistor motor protection 	No
External reset	No
 Adjustable current limitation 	No
• inside-delta circuit	No
Product component Motor brake output	No
Equipment marking acc. to DIN EN 61346-2	Q
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	G

Power Electronics:			
	soft starters for standard applications		
А	80		
А	73		
А	66		
	A		

— at standard circuit at 40 °C Rated value	W	22 000
• at 400 V		
 — at standard circuit at 40 °C Rated value 	W	45 000
yielded mechanical performance [hp] for three-phase	metric	20
AC motor at 200/208 V at standard circuit at 50 °C	hp	
Rated value		
Operating frequency Rated value	Hz	50 60
Relative negative tolerance of the operating	%	-10
frequency		
Relative positive tolerance of the operating frequency	%	10
Operating voltage at standard circuit Rated value	V	200 480
Relative negative tolerance of the operating voltage at standard circuit	%	-15
Relative positive tolerance of the operating voltage at standard circuit	%	10
Minimum load in % of I_M	%	10
Continuous operating current in % of I_e at 40 °C	%	115
Active power loss at operating current at 40 °C during operation typical	W	12
Control electronics:		
Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency 1 Rated value	Hz	50
Control supply voltage frequency 2 Rated value	Hz	60
Relative negative tolerance of the control supply	%	-10
voltage frequency	70	
Polotive positive telerance of the central supply	%	
Relative positive tolerance of the control supply	70	10
voltage frequency		
voltage frequency Control supply voltage 1 with AC at 50 Hz	V	110 230
voltage frequency Control supply voltage 1 with AC at 50 Hz Control supply voltage 1 with AC at 60 Hz		
voltage frequency Control supply voltage 1 with AC at 50 Hz	V	110 230
voltage frequency Control supply voltage 1 with AC at 50 Hz Control supply voltage 1 with AC at 60 Hz Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply	V V	110 230 110 230
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 Hz	V V %	110 230 110 230 -15 10
voltage frequency Control supply voltage 1 with AC at 50 Hz Control supply voltage 1 with AC at 60 Hz Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply voltage with AC at 60 Hz Control supply voltage 1 for DC	V V % V	110 230 110 230 -15 10 110 230
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 Hz	V V %	110 230 110 230 -15 10
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply	V V % V	110 230 110 230 -15 10 110 230
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply	V V % % V %	110 230 110 230 -15 10 110 230 -15
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DC	V V % % V %	110 230 110 230 -15 10 110 230 -15 10
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCDisplay version for fault signal	V V % % V %	110 230 110 230 -15 10 110 230 -15 10
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCMechanical data:	V V % % V %	110 230 110 230 -15 10 110 230 -15 10 red
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCDisplay version for fault signalMechanical data: Size of engine control device Width	V V % V %	110 230 110 230 -15 10 110 230 -15 10 red S3
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCDisplay version for fault signalMechanical data: Size of engine control device	V V % V % %	110 230 110 230 -15 10 110 230 -15 10 red S3 70

Mounting type	_	screw and snap-on mounting
mounting position	-	With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° tiltable to the front
Required spacing with side-by-side mounting		and back
• upwards	mm	60
• at the side	mm	30
		40
downwards	mm	5 000
Installation altitude at height above sea level Cable length maximum	m	300
Number of poles for main current circuit	m	3
		0
Connections/ Terminals:		
Type of electrical connection		
 for main current circuit 		screw-type terminals
 for auxiliary and control current circuit 		spring-loaded terminals
Number of NC contacts for auxiliary contacts		0
Number of NO contacts for auxiliary contacts		1
Number of CO contacts for auxiliary contacts		0
Type of connectable conductor cross-section for main contacts for box terminal using the front clamping point		
• solid		2x (2.5 16 mm²)
 finely stranded with core end processing 		2.5 35 mm ²
• stranded		4 70 mm²
Type of connectable conductor cross-section for main contacts for box terminal using the back clamping point		
• solid		2x (2.5 16 mm²)
 finely stranded with core end processing 		2.5 50 mm²
● stranded		10 70 mm²
Type of connectable conductor cross-section for main contacts for box terminal using both clamping points		
• solid		2x (2.5 16 mm²)
 finely stranded with core end processing 		2x (2.5 35 mm²)
• stranded		2x (10 50 mm²)
Type of connectable conductor cross-section for AWG conductors for main contacts for box terminal		
 using the back clamping point 		10 2/0
 using the front clamping point 		10 2/0
 using both clamping points 		2x (10 1/0)
Type of connectable conductor cross-section for DIN cable lug for main contacts		

 finely stranded 		2 x (10	50 mm²)	
• stranded		2x (10	70 mm²)	
Type of connectable conductor cross-section for auxiliary contacts	or			
• solid		2x (0.25 .	2.5 mm²)	
 finely stranded with core end processing 		2x (0.25 .	1.5 mm²)	
Type of connectable conductor cross-section for AWG conductors	or			
• for main contacts		2x (7 1	/0)	
 for auxiliary contacts 		2x (24	14)	
mbient conditions:				
Ambient temperature				
 during operation 	°C	-25 +60	D	
• during storage	°C	-40 +80)	
Derating temperature	°C	40		
Protection class IP		IP00		
Certificates/ approvals:				
General Product Approval			EMC	Test Certificates
		EHC	C-TICK	<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>
other				
	invironmental			
	Confirmations			

UL/CSA ratings:		
yielded mechanical performance [hp] for three-phase		
AC motor		
● at 220/230 V		
— at standard circuit at 50 °C Rated value	metric hp	25
● at 460/480 V		
— at standard circuit at 50 °C Rated value	metric hp	50
Contact rating of the auxiliary contacts acc. to UL		B300 / R300
Further information		

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) http://www.siemens.com/industrymall


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW30462BB14


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RW30462BB14/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/index.aspx?attID9=3RW30462BB14&lang=en







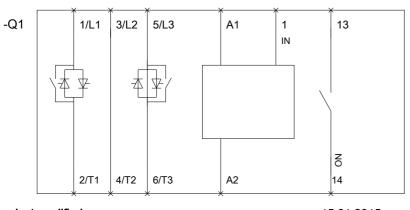

last modified:

15.01.2015