

Telit EVK2 User Guide

1wv0300704 Rev.13- 2012/06/25



Telit EVK2 User Guide

1vv0300704 Rev.13- 2012/06/25

HE863-NAD INTERFACE	3990250799	HE863
HE863-NAR INTERFACE	3990250800	HE863
HE863-NAG INTERFACE	3990250801	HE863
HE863-AUR INTERFACE	3990250803	HE863
HE863-AUG INTERFACE	3990250804	HE863
HE910 INTERFACE	3990250845	HE910



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Notice

While reasonable efforts have been made to assure the accuracy of this document, Telit assumes no liability resulting from any inaccuracies or omissions in this document, or from use of the information obtained herein. The information in this document has been carefully checked and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies or omissions. Telit reserves the right to make changes to any products described herein and reserves the right to revise this document and to make changes from time to time in content hereof with no obligation to notify any person of revisions or changes. Telit does not assume any liability arising out of the application or use of any product, software, or circuit described herein; neither does it convey license under its patent rights or the rights of others.

It is possible that this publication may contain references to, or information about Telit products (machines and programs), programming, or services that are not announced in your country. Such references or information must not be construed to mean that Telit intends to announce such Telit products, programming, or services in your country.

Copyrights

This instruction manual and the Telit products described in this instruction manual may be, include or describe copyrighted Telit material, such as computer programs stored in semiconductor memories or other media. Laws in the Italy and other countries preserve for Telit and its licensors certain exclusive rights for copyrighted material, including the exclusive right to copy, reproduce in any form, distribute and make derivative works of the copyrighted material. Accordingly, any copyrighted material of Telit and its licensors contained herein or in the Telit products described in this instruction manual may not be copied, reproduced, distributed, merged or modified in any manner without the express written permission of Telit. Furthermore, the purchase of Telit products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any license under the copyrights, patents or patent applications of Telit, as arises by operation of law in the sale of a product.

Computer Software Copyrights

The Telit and 3rd Party supplied Software (SW) products described in this instruction manual may include copyrighted Telit and other 3rd Party supplied computer programs stored in semiconductor memories or other media. Laws in the Italy and other countries preserve for Telit and other 3rd Party supplied SW certain exclusive rights for copyrighted computer programs, including the exclusive right to copy or reproduce in any form the copyrighted computer program. Accordingly, any copyrighted Telit or other 3rd Party supplied SW computer programs contained in the Telit products described in this instruction manual may not be copied (reverse engineered) or reproduced in any manner without the express written permission of Telit or the 3rd Party SW supplier. Furthermore, the purchase of Telit products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any license under the copyrights, patents or patent applications of Telit or other 3rd Party



supplied SW, except for the normal non-exclusive, royalty free license to use that arises by operation of law in the sale of a product.

Usage and Disclosure Restrictions

License Agreements

The software described in this document is the property of Telit and its licensors. It is furnished by express license agreement only and may be used only in accordance with the terms of such an agreement.

Copyrighted Materials

Software and documentation are copyrighted materials. Making unauthorized copies is prohibited by law. No part of the software or documentation may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, without prior written permission of Telit

High Risk Materials

Components, units, or third-party products used in the product described herein are NOT fault-tolerant and are NOT designed, manufactured, or intended for use as on-line control equipment in the following hazardous environments requiring fail-safe controls: the operation of Nuclear Facilities, Aircraft Navigation or Aircraft Communication Systems, Air Traffic Control, Life Support, or Weapons Systems (High Risk Activities"). Telit and its supplier(s) specifically disclaim any expressed or implied warranty of fitness for such High Risk Activities.

Trademarks

TELIT and the Stylized T Logo are registered in Trademark Office. All other product or service names are the property of their respective owners.

Copyright © Telit Communications S.p.A.



Contents

1.	Introduction	12
1.1.	Scope	12
1.2.	Audience	12
1.3.	Contact Information, Support.....	12
1.4.	Text Conventions.....	13
1.5.	Related Documents.....	13
1.6.	Content of the kit.....	14
2.	Description	15
2.1.	PCB characteristics	16
2.2.	Mechanical characteristics of the assembled PCBs.....	17
2.2.1.	Mother Board CS1139B	17
2.2.2.	GM862 Interface CS1150B.....	17
2.2.3.	GE863 Interface CS1151A.....	17
2.2.4.	GE864 Interface CS1152B.....	17
2.2.5.	GE864-GPS Interface CS1439B	17
2.2.6.	GC864 Interface CS1203B.....	18
2.2.7.	GC864-C2 Interface CS1231X.....	18
2.2.8.	GE865 Interface CS1324A.....	18
2.2.9.	GE865/SE867-AGPS Interface CS1433.....	18
2.2.10.	GE865/JF2 Interface CS1521.....	18
2.2.11.	GL865 Interface CS1431A.....	18
2.2.12.	UC864-CC864 Interface KS0101C.....	19
2.2.13.	HE910 Interface CS1467C	19
3.	Startup procedure	20
4.	Insertion of the Interface Boards.....	21
5.	Power supply setting	22
5.1.	Fixed DC source.....	22
5.2.	Variable DC source	23
5.2.1.	Coaxial Plug	24
5.3.	Li-Ion Battery pack and Charger	24
5.4.	Application Notes	25
5.4.1.	Li-Ion Battery Pack	25
5.4.2.	About Current Charger.....	25
6.	Serial interface.....	26
6.1.	Serial Port Setup.....	27



7.	Audio Section	28
7.1.	Overview	28
7.1.1.	History	28
7.2.	Actual.....	29
7.2.1.	The choice	29
7.3.	Differential and Single Ended	29
7.3.1.	Concepts	29
7.3.2.	Benefits and disadvantages.....	30
7.3.3.	Settings	31
8.	AF Amplifiers Setting	32
9.	Audio outputs.....	33
9.1.	Low AF Power Mode	33
9.2.	High AF Power Mode.....	34
9.2.1.	Speaker and Stand-alone Microphone	35
9.2.2.	Speaker plus Headset.....	36
10.	Audio Accessories	37
10.1.	Headset	37
10.2.	Stand-alone microphone	38
10.3.	Speaker	38
11.	Indication and services	39
11.1.	Optical Indicators.....	39
11.1.1.	Status Led	39
11.1.2.	CHARGE Led	40
11.2.	Switches	41
11.2.1.	POWER ON Switch	41
11.2.2.	RESET Switch.....	41
12.	Connectors pinout.....	42
12.1.	Motherboard to Module	42
13.	Module Interface Boards	45
13.1.	Generality.....	45
13.2.	Short Description.....	45
13.3.	Further Accessories for GPS version.....	45
14.	GM862 Interface.....	46
14.1.	Stand-alone setup	46
14.2.	Interface connectors	47
14.3.	Content of the kit.....	47



15.	GE863 Interface	48
15.1.	Stand-alone setup	48
15.2.	Content of the kits	49
15.2.1.	GE863-PY/QUAD version	49
15.2.2.	GE863-GPS version	49
15.2.3.	GE863-SIM version	49
15.3.	Interface connectors	49
15.4.	Additional components for GPS version	49
15.5.	USB connector	50
15.6.	Serial port configuration	51
15.6.1.	GE863-PY/QUAD	51
15.6.2.	GE863 – GPS	52
15.7.	ANTENNA connectors	53
15.7.1.	GPS ANTENNA connector	53
15.7.2.	GSM ANTENNA connector	53
15.7.3.	RFU ANTENNA connector	53
16.	GE864 Interface	54
16.1.	Stand-alone setup	54
16.2.	Interface connectors	55
16.3.	Content of the kit	55
17.	GE864-GPS Interface	56
17.1.	Part numbering	56
17.2.	Stand-alone setup	56
17.3.	Interface connectors	57
17.4.	Contents of the kit	57
17.5.	Power supply	58
17.6.	GPS external LNA enable signal	58
17.7.	Serial port configuration	59
17.7.1.	ASC1 to RS-232	60
17.7.2.	GPS to ASC1 (internal host controlling configuration)	60
17.7.3.	GPS to RS-232 (external host controlling configuration)	61
17.7.4.	GPS to USB	61
17.8.	GPIO settings	62
17.8.1.	Internal host controlling configuration	62
17.8.2.	External host controlling configuration	63
17.9.	Antenna connectors	65
17.9.1.	GSM antenna connector	65
17.9.2.	GPS antenna connector	65



18.	GE865 – SE867 AGPS Interface	66
18.1.	Stand-alone setup	66
18.2.	Interface connectors	67
18.3.	Contents of the kit	67
18.3.1.	GSM to GPS (GSM controlling configuration)	68
18.3.2.	GSM to Trace	69
18.3.3.	GPS to Trace(external host controlling configuration)	70
18.4.	Antenna connectors	70
18.4.1.	GSM antenna connector	70
18.4.2.	GPS antenna connector	70
19.	GE865 – JF2 Interface	71
19.1.	Stand-alone setup	71
19.2.	Interface connectors	72
19.3.	Contents of the kit	72
19.4.	Power supply	72
19.5.	GPS external LNA enable signal	73
19.6.	Serial port configuration	75
19.7.	GSM to Trace	75
19.8.	GPS to Trace	76
19.9.	GSM to USB	77
19.10.	GPS to USB	77
19.11.	GPS to GSM (internal host controlling configuration)	78
19.12.	GPIO settings	78
19.12.1.	Internal host controlling configuration	78
19.12.2.	External host controlling configuration	79
19.13.	GPS serial interface setting	80
19.14.	MEMS Sensor/EEPROM Interface	81
19.15.	GPS power-on management	81
19.16.	Antenna connectors	81
19.16.1.	GSM antenna connector	81
19.16.2.	GPS antenna connector	82
20.	GC864 Interface	83
20.1.	Stand-alone setup	83
20.2.	Interface connectors	84
20.3.	Content of the kit	84
21.	GC864-C2 family Interface	85



21.1.	Stand-alone setup	85
21.2.	Interface connectors	86
21.3.	Content of the kit.....	86
22.	GE865 Interface	87
22.1.	Stand-alone setup	87
22.2.	Interface connectors	88
22.3.	Content of the kit.....	88
23.	GL865 Interface	89
23.1.	Stand-alone setup	89
23.2.	Interface connectors	90
23.3.	Content of the kit.....	90
24.	UC864 family Interface	91
24.1.	Stand-alone setup	91
24.2.	Interface connectors	92
24.3.	Content of the kit.....	92
25.	HE910 family Interface	93
25.1.	Stand-alone setup	93
25.2.	Interface connectors	94
25.3.	Antenna connectors	95
25.3.1.	GSM/UMTS Antenna connector	95
25.3.2.	Receiver Diversity Antenna connector	95
25.3.3.	GPS antenna connector.....	95
25.4.	Expansion Connectors	96
25.4.1.	PL301/PL302.....	96
25.4.2.	PL303/PL304/PL305.....	96
25.4.3.	PL102	98
25.4.4.	ON_OFF & RESET BUTTONS	98
25.5.	Content of the kit.....	98
26.	GPIO ports	99
26.1.	GPIO location	100
26.1.1.	GM862 Interface	100
26.1.2.	GE863-GPS Interface.....	102
26.1.3.	GE863 Interfaces (p/n 3990250684 -3990250685-3990250703)	104
26.1.4.	GE864 Interface (p/n 3990250672).....	104
26.1.5.	GE864-GPS Interface (p/n 3990250822)	105
26.1.6.	GE865/SE867-AGPS Interface (p/n 3990250814).....	107
26.1.7.	GC864 Interface	108
26.1.8.	GC864-C2 Interface (p/n 3990250683).....	109



26.1.9.	UC864 Interface	110
26.1.10.	HE910 Interface	111
27.	SCHEMATICS	113
27.1.	EVK2 Mother Board.....	114
27.2.	GM862 Interface Board.....	119
27.3.	GE863 Interface Board	120
27.4.	GE864 Interface board	122
27.5.	GE864 Interface board – Automotive.....	123
27.6.	GE864 Interface board – V2.....	124
27.7.	GE864-GPS Interface board	125
27.8.	GE865/SE867-AGPS Interface board.....	127
27.9.	GE865 Interface board	129
27.10.	GL865 Interface board	130
27.11.	GC864 Interface board	131
27.12.	GC864-C2 Interface board	132
27.13.	UC864 Interface board	133
27.14.	HE910 Interface board	135
27.1.	GE865 – JF2 Interface board	138
28.	Service and firmware update.....	141
29.	SAFETY RECOMMENDATIONS.....	142
29.1.	Disposal of this product in the European Union.....	143
30.	RoHS Certifications.....	145
31.	Disposal of old Electrical & Electronic Equipment (WEEE Mark)	146
32.	Document History	147



1. Introduction

1.1. Scope

The Aim of this document is the handling description of the *developer's Evaluation KIT* second edition, a laboratory tool named **EVK2**.

1.2. Audience

All given information shall be used as a guide and a starting point for properly developing of your product. Obviously this document cannot cover all the hardware solutions and products that may be designed.

1.3. Contact Information, Support

For general contact, technical support, to report documentation errors and to order manuals, contact Telit's Technical Support Center (TTSC) at:

TS-EMEA@telit.com
TS-NORTHAMERICA@telit.com
TS-LATINAMERICA@telit.com
TS-APAC@telit.com

Alternatively, use:

<http://www.telit.com/en/products/technical-support-center/contact.php>

For detailed information about where you can buy the Telit modules or for recommendations on accessories and components visit:

<http://www.telit.com>

To register for product news and announcements or for product questions contact Telit's Technical Support Center (TTSC).

Our aim is to make this guide as helpful as possible. Keep us informed of your comments and suggestions for improvements.

Telit appreciates feedback from the users of our information.



1.4. Text Conventions



*Danger – This information **MUST** be followed or catastrophic equipment failure or bodily injury may occur.*



Caution or Warning – Alerts the user to important points about integrating the module, if these points are not followed, the module and end user equipment may fail or malfunction.



Tip or Information – Provides advice and suggestions that may be useful when integrating the module.

All dates are in ISO 8601 format, i.e. YYYY-MM-DD.

1.5. Related Documents

- Telit's GSM/GPRS Family Software User Guide, 1vv0300784
- Audio settings application note , 80000NT10007a
- Digital Voice Interface Application Note, 80000NT10004a
- HE910 Digital Voice Application Note, 80000NT10050a
- SIM Holder Design Guides, 80000NT10001a
- AT Commands Reference Guide, 80000ST10025a
- Telit EVK2 User Guide, 1vv0300704



1.6. Content of the kit

Please check out the content of your *EVK2* kit; if any of the items is missing, please contact your supplier.

Description	Quantity
EVK2 MOTHERBOARD	1
INFORMATION NOTE	1
2 PIN JUMPER FEMALE CONN	18
ASSEMBLED USB A-B CABLE	1
RED & BLACK CABLE WITH PLUGS	1
GSM-UMTS MAGNETIC ANTENNA	1
CABLE RG174 WITH SMA/M	1

Table 1



Figure 1: GE863-PY Interface Board (upper) fitted on EVK2 Motherboard (lower).



2. Description

The motherboard *CS1139B* can be split into several functional blocks depending on the implemented function; the following drawings show a block diagram and the displacement of the main blocks on motherboard.

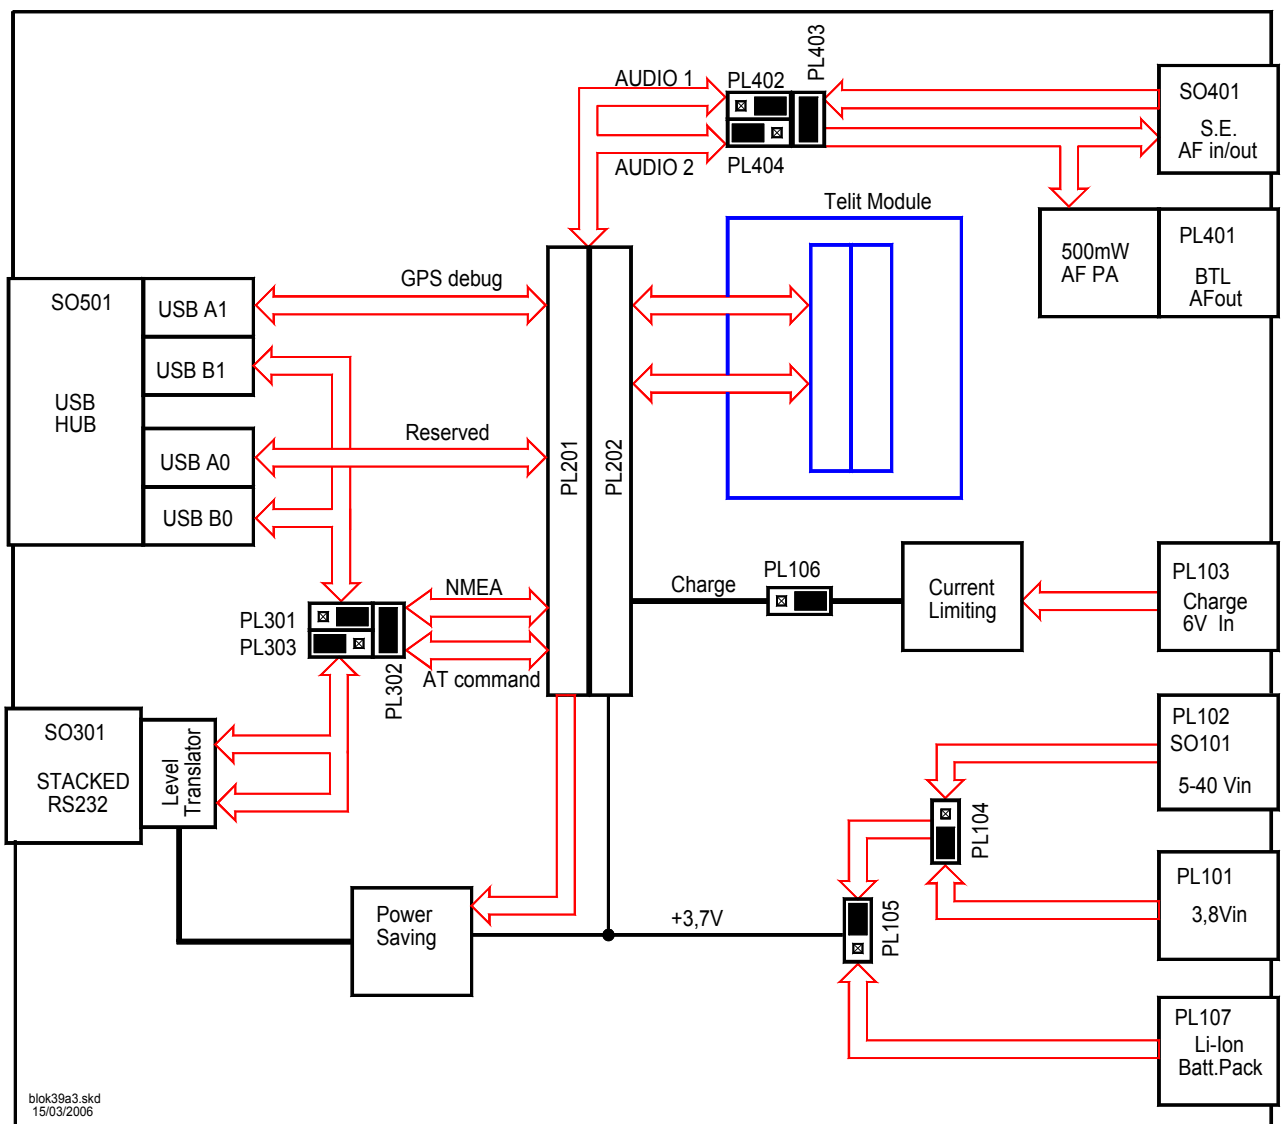


Figure 2: Miscellaneous signals, connections and routing on *CS1139B*.



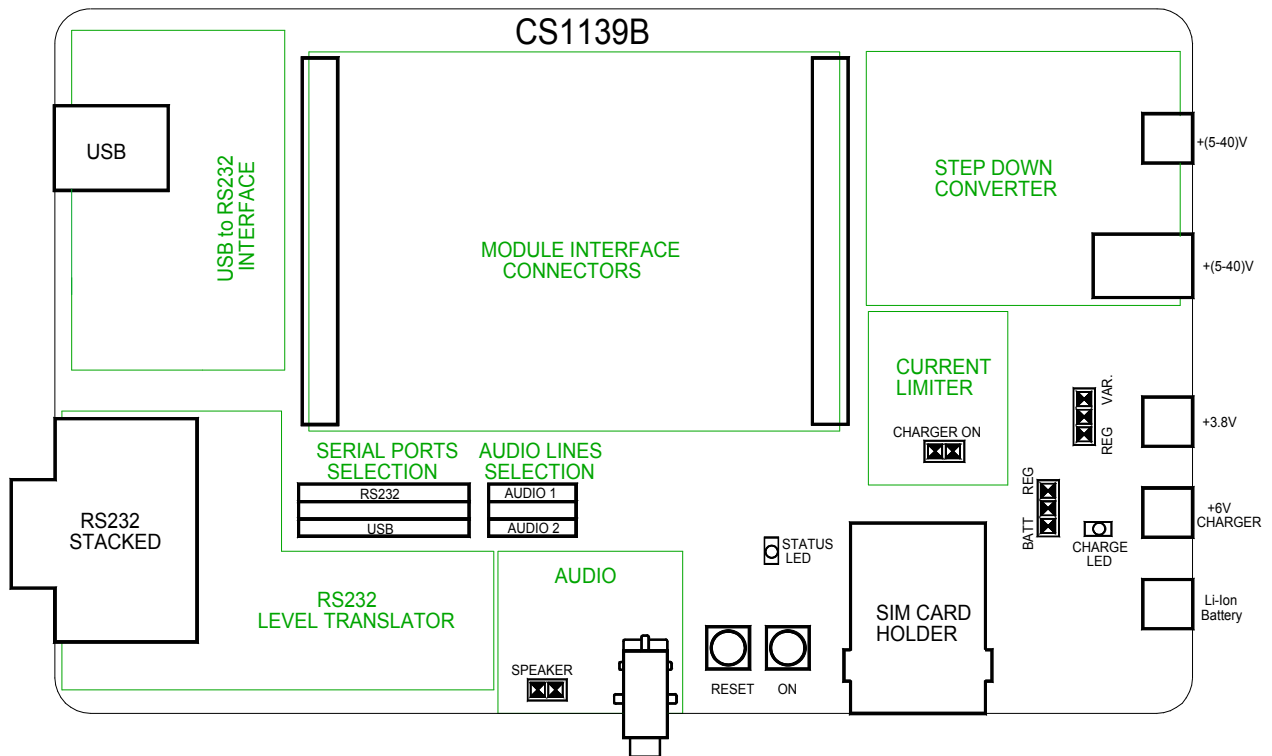


Figure 3: CS1139B circuital displacement

2.1. PCB characteristics

Material : FR4
Thickness: 0,95 mm
Surface finishing: Chemical gold plate Ni 5um/ Au 0,1um



2.2. Mechanical characteristics of the assembled PCBs

2.2.1. Mother Board CS1139B

Length	100 mm (max 102,6 mm)
Width	160 mm (max 166,10mm)
Height	47,6 mm (included the support with columns)
Weight	200 gr (without any interface)

2.2.2. GM862 Interface CS1150B

Length	66,04 mm
Width	78,74 mm
Height	21,00 mm
Weight	27 gr (without the module)

2.2.3. GE863 Interface CS1151A

Length	75 mm (max 84,70mm)
Width	78,74 mm
Height	21,00 mm
Weight	40 gr (with module)
Weight	44,3 gr (with module for GPS version)

2.2.4. GE864 Interface CS1152B

Length	66,04 mm (max 75,20mm)
Width	78,74 mm
Height	21,00 mm
Weight	36 gr (with module)

2.2.5. GE864-GPS Interface CS1439B

Length	78.70 mm (max mm)
Width	83.70 mm
Height	21 mm



2.2.6. GC864 Interface CS1203B

Length	66,04 mm
Width	78,74 mm
Height	21,00 mm
Weight	27 gr (without the module)

2.2.7. GC864-C2 Interface CS1231X

Length	50,00 mm
Width	33,00 mm
Height	5,60 mm
Weight	13,8 gr (with module)

2.2.8. GE865 Interface CS1324A

Length	66,04 mm (max 75,20mm)
Width	78,74 mm
Height	21,00 mm
Weight	34 gr (with module)

2.2.9. GE865/SE867-AGPS Interface CS1433

Length	101.00 mm
Width	78.74 mm
Height	mm

2.2.10. GE865/JF2 Interface CS1521

Length	101,00 mm
Width	78,74 mm
Height	mm

2.2.11. GL865 Interface CS1431A

Length	66,04 mm (max 75,20mm)
Width	78,74 mm
Height	21,00 mm
Weight	34 gr (with module)



2.2.12. UC864-CC864 Interface KS0101C

Length	102,00 mm
Width	67,50 mm
Height	20,80 mm
Weight	55 gr (without module)

2.2.13. HE910 Interface CS1467C

Length	107,00 mm
Width	102,00 mm
Height	25,00 mm



NOTE:

The overall height for every combination (mother board + interface board) is still the height of the mother board



3. Startup procedure

The motherboard factory setup is:

Serial port	RS232
DC source	+ (5÷40) V / ≥ 1A
Batt.Charger connector (PL106)	On
RX Amplifier	Audio 1

Respect the following order to use the EVK2:

- insert your SIM card
- set properly all jumpers in the desired position
- plug the module Interface board into PL201 and PL202
- connect the antenna to RF connector (on module or on Interface Board)
- connect the audio accessories if required
- plug the external power supply into the right socket, depending from DC source
- switch ON the power supply
- connect the serial cable between your PC and UART (RS232 or USB 1.1)
- push ON/OFF button for at least 2 seconds (4 seconds if the power supply is lower then 3,4V) until the STATUS LED is on

Your EVK2 should now be operational and ready to receive AT Commands.



NOTE:

When you use USB port, it is very important to respect the following sequences:

Start: first turning ON the EVK2 and then connecting it to the PC

Stop: first disconnecting the PC and then turning OFF the EVK2



4. Insertion of the Interface Boards

Every *Interface Board* must be inserted on *CS1139B* paying great attention to match the position of the main connectors; this has been made easy:

optically by a triangle drawn on both printed circuits (except CS1231X) ;
mechanically shifting a column out of regular square cross position.

Both guide systems are highlighted by orange color as shown on the next figure.

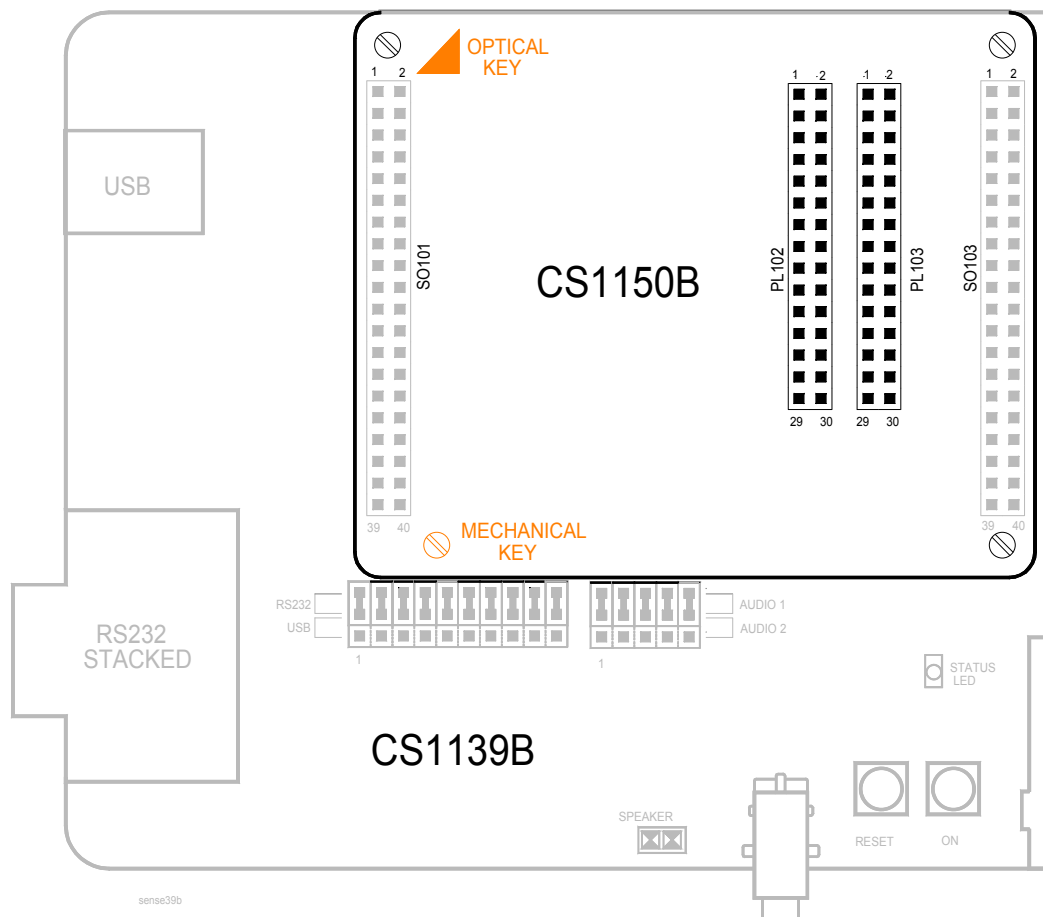


Figure 4: Positioning Guide Systems of *GM862 Interface Board* on *CS1139B*.



5. Power supply setting

The **EVK2** could be powered by different external sources, only one at time. The requested setting is made inserting the proper jumper connectors in the right position as described in the following paragraphs.

Be careful to the connections, even if every supply line is protected by a diode against “*polarity reversing*” and by a 0Ω resistor against “*short circuiting*”.

5.1. Fixed DC source

Connect a **+3,8V / $\geq 2A$** fixed DC source to PL101 respecting the polarization; short *pin2 & pin3 – PL104* and *pin1 & pin2- PL105* by 2 contacts jumper connectors. No other jumpers are needed.

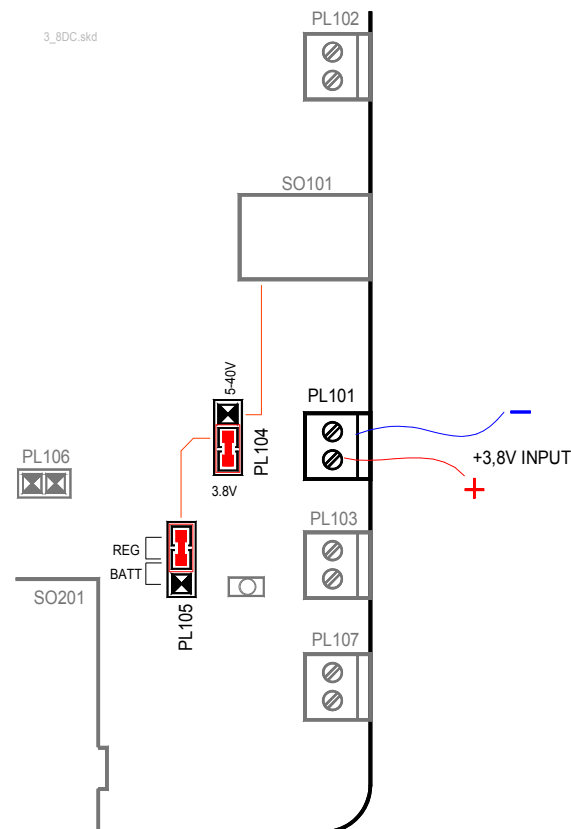



Figure 5: +3,8V fixed source setting



Connect a +5÷40 V / ≥1A variable DC source to PL102 (*by wires*) or to SO101 (*by coaxial plug*), with care to the polarities. Short *pin1*& *pin2*-PL104 and *pin1*& *pin2*-PL105 by inserting 2 *contacts jumper* connectors.
No other jumpers are needed.



It is useful set the variable DC source at 6V minimum to avoid problems with voltage drops due to the length of the wires or the conductors gauge.



5.2.1. Coaxial Plug

The figure 7 shows the connections of the Power Plug of left part of figure 6.

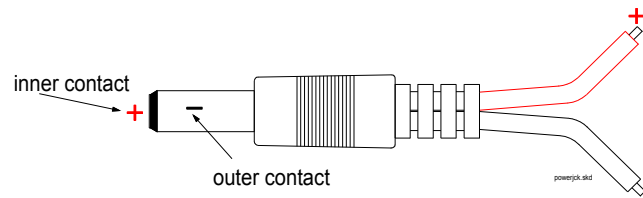


Figure 7: Coaxial “Power Plug” connection.

5.3. Li-Ion Battery pack and Charger

Connect a **Li-Ion battery pack** to PL107 with care to the polarity then short pin 2& pin3- PL105 by inserting the 2 contacts jumper connector.

If the battery pack needs to be recharged, connect a **+6V / $\geq 0,5A$** fixed DC source to PL103, with care to the polarity; short PL106 inserting a 2 contacts jumper connector as shown in figure 8: the yellow CHARGE LED will be on during the initial phase of charge. If you remove the battery pack when the charge stops (no current flows), immediately **REMOVE** also the jumper of PL106.

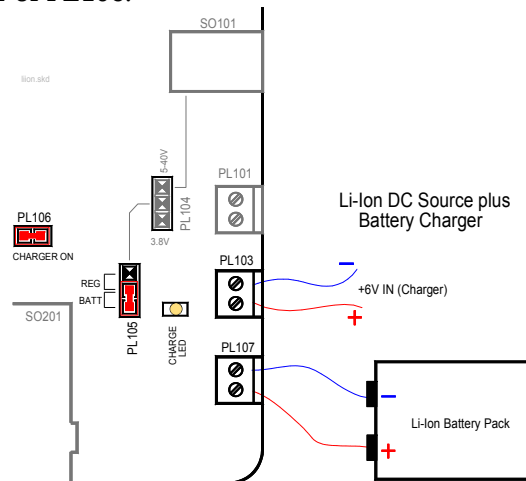


Figure 8: Battery Pack and Battery Charger wired connections and setting.



WARNING:

NEVER CONNECT any Battery Charging source to PL102 without connected Battery!!



5.4. Application Notes

5.4.1. Li-Ion Battery Pack

The 3.7V Li-Ion rechargeable Battery Pack should be connected directly to PL107 connector. Remember to use the connection cables as short as possible, with the appropriate conductors gauge and the other attributes, such as device power budget and cable flexibility, in order to match the specified voltage drop (especially during the high current absorption periods). To obtain the best performance we suggest a capacity of **1000 mAh** (not lower than 500 mAh).

5.4.2. About Current Charger

With a +6V **Current Unlimited Source** connected to PL103 connector, the battery pack will be directly charged through *VBATT connector pins* of the Telit Modules, under control of the *Internal Charge Algorithm* (only on models where is implemented).

Depending of the size, the Li-Ion cell manufacturers suggest a charge current value not greater than 1,5C (C= Capacity of the battery pack, expressed in mAh); even if a lower current means a longer charging time, a current equal to 0,5C is considered to be a good choice.

With reference to the schematic diagram 30276SE11139A –sheet1, the Current Limiting Circuit (Q102, Q103, R106, R107, R108, R109, R110, R111, R112, R113, C105) sets the maximum value of the Charge Current in respect to the law:

$$I_{ch} = \frac{V_{be} Q102}{R_{par}} \rightarrow \text{where}$$

$$R_{par} = //R110, R111, R112, R113$$

With the default values, the charge current will be ~ 470mA, which will charge Battery Packs with a capacity from 350mAh to 1000mAh, **without any dissipation problem**.

If a higher capacity Battery Pack is needed, you must increment the Time Out in the Telit Modules.



WARNING:

SET THE MAXIMUM VOLTAGE of the **CURRENT UNLIMITED SOUCE** lower then +8V.



The following figure shows the architecture of the serial ports.



6.1. Serial Port Setup

Communications between your application and the Telit modules are allowed connecting the DTE to the *Asynchronous Serial Interfaces* of Base-Band Chip, ASC0 and ASC1, through the *stacked standard RS232 communications port* (double 9 way D-socket connector at slow data rates of RS232 protocol) or a *standard USB-B Series receptacle* (at higher data rates of USB1.1 specification through a CMOS HUB that realizes a multiple attachment point device).

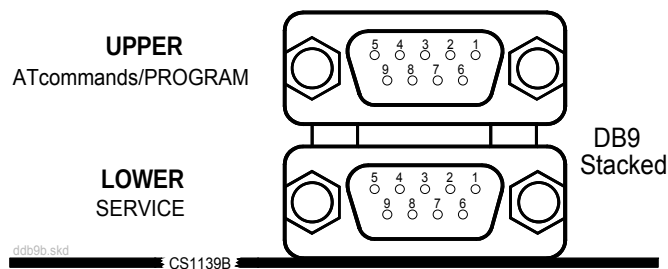


Figure 10: Double 9 way D-Socket Connector

The selection is made short circuiting *PL302&PL303 (RS232 mode)* or *PL302&PL301 (USB 1.1 mode)* by 10 pieces of 2 contacts jumpers. This solution has been implemented because you can isolate every single line during the development.

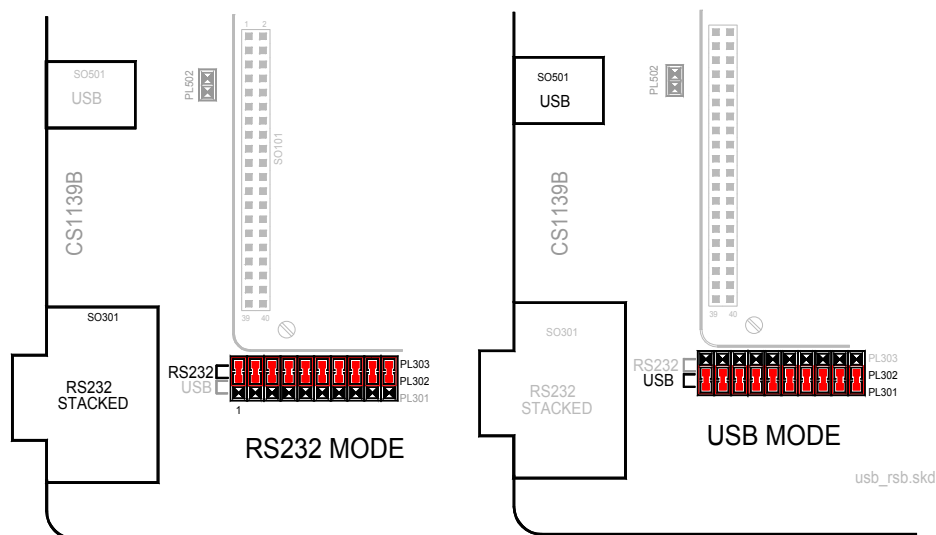


Figure 11: Serial Ports selection



7. Audio Section

7.1. Overview

The Base Band chip of the Telit's modules provides one or two (depends of model) audio paths both in receive and in transmit sections, which could be active only one at time.

To turn on your well-suited section on EVK2, please refer to “*AF Amplifiers Setting*” paragraph and followings.

To know which are the suggested performances of the EVK2 audio transducers, refer to “*Audio Accessories*” paragraph.

7.1.1. History

The Baseband chip of our modules was developed for the cellular phones, which needed two separated amplifiers both in RX and in TX section. A couple of amplifiers had to be used with internal audio transducers (Handset mode, *HS*) while the other couple of amplifiers must be used with external audio transducers (Handsfree mode, *HF*).

Transducers definitions:

Headsets are transducers that receive an electrical signal from a receiver and use speakers placed in close proximity to the ears to convert the signal into audible sound waves.

In the context of telecommunication, the word *Headset* is also commonly understood to refer to a combination of *Headphone* and *Microphone* used for two-way communication, like with a mobile phone.

Earphones are small Headphones that are placed directly outside of the ear canal, but without fully enveloping it. They are generally inexpensive and are favored for their portability and convenience.

Earpiece A part whether of a telephone receiver or hearing aid, that fits in or is held next to the ear.



7.2. Actual

The *HS* and *HF* definitions have been kept in the Software and on the schematics of the Telit modules, but with EVK2 we will refer to *Audio1* and *Audio2* section instead of *Handset* and *Handsfree* respectively, remembering that:

they can have fully equivalent electrical performances (*like the two microphone amplifiers*)
they can activate the same functionalities (*like the Echo Canceller module*)
they can offer slightly different performances (*like the two speaker buffering stages*)

7.2.1. The choice

The activation of the audio path is made Hardware by **AXE** line or Software by **AT#CAP** command.

If you don't have any load driving constraint (*like a speaker with an impedance coil lower than 16 ohm*), the choice between one or other “*block*” could be done without consideration related to the electrical performances; for example in order to overcome the PCB design difficulties.

7.3. Differential and Single Ended

7.3.1. Concepts

Any voltage can be characterized by a potential difference between two terminals.

The configuration of the two terminals and how the signal is delivered from output to input allows the signal to be more generally described in one of three ways:

Single-ended signal. This is a signal delivered between a signal trace and a ground. One terminal for a single-ended connection is always at fixed potential (*usually Ground*).

Differential Signals. These are signals that travel through a pair of traces. On the signal pair, neither of the terminals is Ground.

Common mode Signals. They represent a special case of differential signals, also travelling between a pair of traces, where the voltage potential on both signals is the same.



7.3.2. Benefits and disadvantages

Differential amplifiers are desirable to use, especially in audio applications where signal levels are very low such as those from microphones.

Classically, the benefits obtained from differential amplification are:

Increase of Common Mode Rejection Ratio (CMRR)

Differential inputs enable cancellation of any noise common on both inputs. Noise generated at the input of the amplifier has a greater effect than noise generated at the output, because any noise on the input is multiplied by the gain of the amplifier.

Increase Signal to Noise Ratio (SNR)

The inputs to the amplifier are especially sensitive to noise because they are typically not driven by a very low impedance source.

High Rejection in Electromagnetic Interference (EMI)

Noise immunity is very important in wireless phones because the RF signal is sent in bursts such that the frequency between bursts is in the audio band. RF rectification is such a problem that many manufacturers shield the audio portion of the phone.

Double Useful signals level

The signal levels from microphone and the voltage swing to the load are doubled. Then the AF power to the load it is 4 times the single-ended Afpower at the same voltage supply.

No output blocking capacitor is needed

Even if the differential outputs are biased at half-supply; no DC voltage exists across the load. You do not need the big, expensive and heavy blocking capacitors (generally from 33 μ F to 1000 μ F), lowering the cost and saving PCB space

There is no frequency limiting effect due to the high pass filter network created with the speaker impedance and the coupling capacitance.

Less shielding is required from amplifier to load

Mainly we have only one disadvantage using differential amplification: the routing of one more signal line could be more difficult and the additional trace requires more board space.



7.3.3. Settings

Connecting your accessories to *SO401 in/out connector*, you will implement Single Ended Input/Output configurations.

Removing all 2 *contacts jumpers* inserted between *PL402&PL403* or *PL403&PL404*, the *in/out lines* of our modules will be directly available on *PL402* and *PL404* connectors.

In such a way, you will be able to implement fully Differential Input/Output configurations. Only with GC864-QUAD/PY-C2 modules the *Ear output* lines are AC coupled.


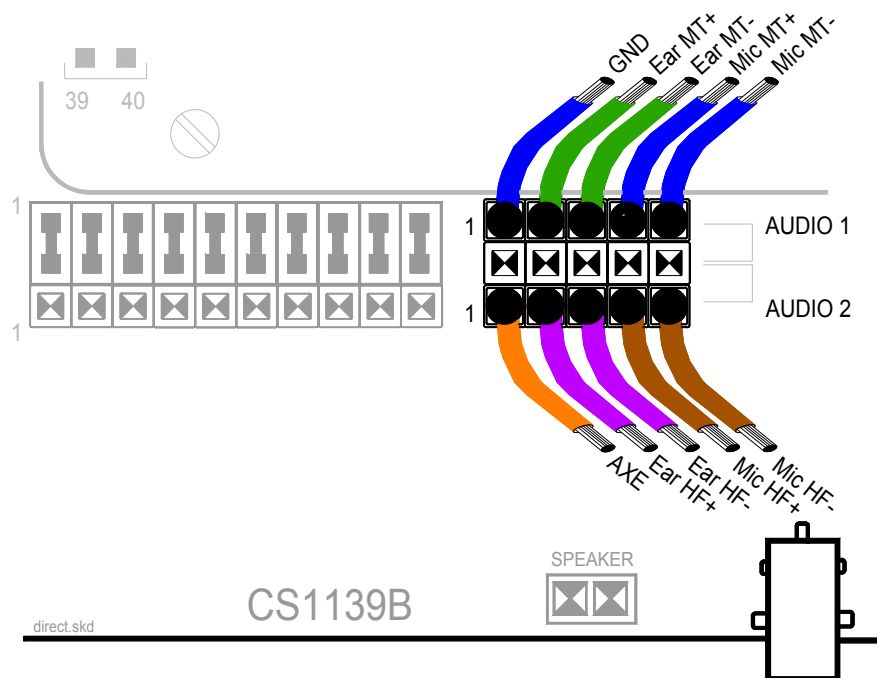


Figure 12: PL402 and PL404 Fully Differential audio lines.



The *Base Band Processor Audio Amplifiers* selection is made short-circuiting *PL403&PL402* (RX Amplifier 1) or *PL403&PL404* (RX Amplifier 2). In such a way you could verify the complete performance of both audio paths.



9. Audio outputs

The EVK2 output audio signals could be drive a device connected to *SO401* (LOW AF POWER mode) or to *PL401* (HIGH AF POWER mode).

9.1. Low AF Power Mode

Inserting the 2 *contacts jumpers* as explained at paragraph 9A, a standard *off-the-shelf Headset* should be connected to the *SO401* (3 contacts, 2.5mm diameter jack connector).
With such an insertion, the Telit Modules will power the Microphone through a Single Ended input circuit and the Earpiece through a Single Ended/ AC coupled output circuit.



NOTE:

The acoustic performance of the *Headset* (*frequency response, loudness*) largely depends by its housing, fitting and acoustic impedance.

The coil impedance of the Headset should be higher than 15 ohm @ 1KHz.

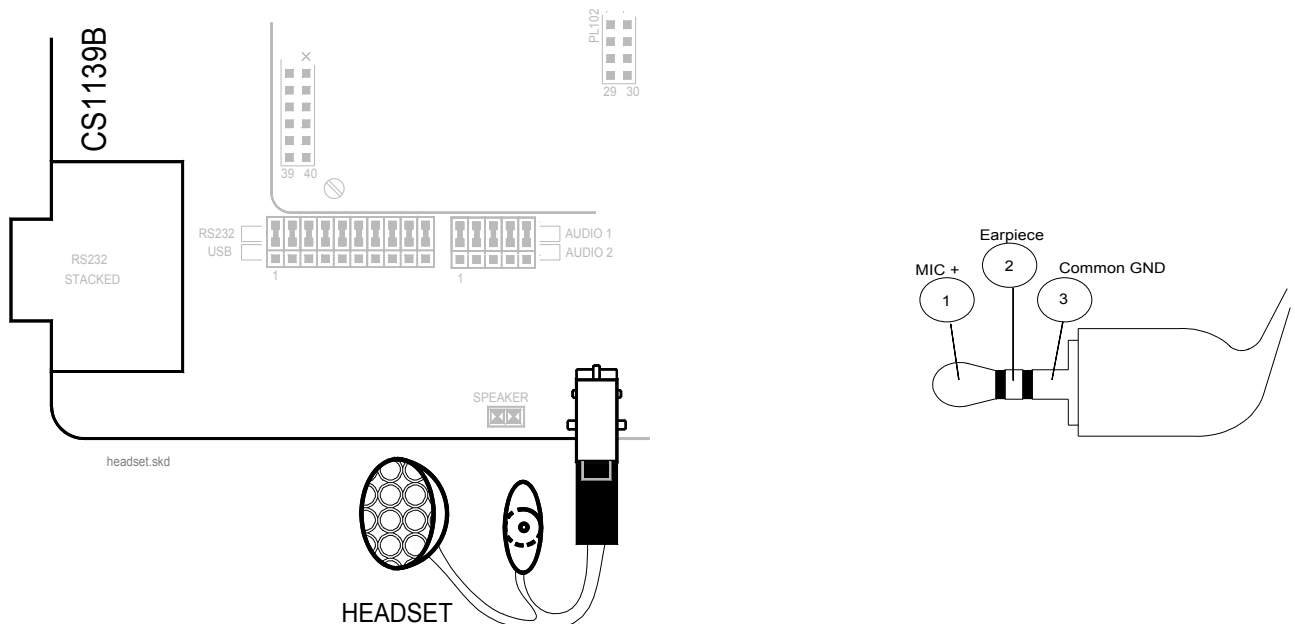


Figure 14: Headset insertion




Connecting an **8 ohm** Speaker to PL401 by a 2 contacts female connector, you could drive it through the 500mW Power Amplifier.

In this case the Speaker will be driven in fully differential configuration, with no side connected to ground and without any output coupling capacitor. Therefore care must be taken because there is DC voltage on both sides of the Speaker.

$$A_v = 2 \bullet \frac{R404}{R406} = 2 \bullet \frac{R407}{R410} \quad \text{if } R404=R407 \text{ and } R406=R410$$


The coil impedance of the Speaker should be higher than 8 ohm @ 1KHz .



If you are using a Speaker, you can connect a *stand-alone electrete microphone* by a coaxial 2,5mm plug to SO401, respecting the following pin-out.

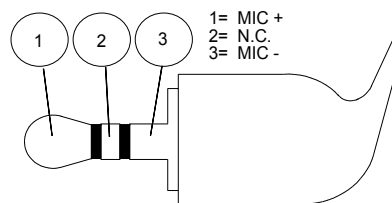


Figure 17: Microphone Plug Connection

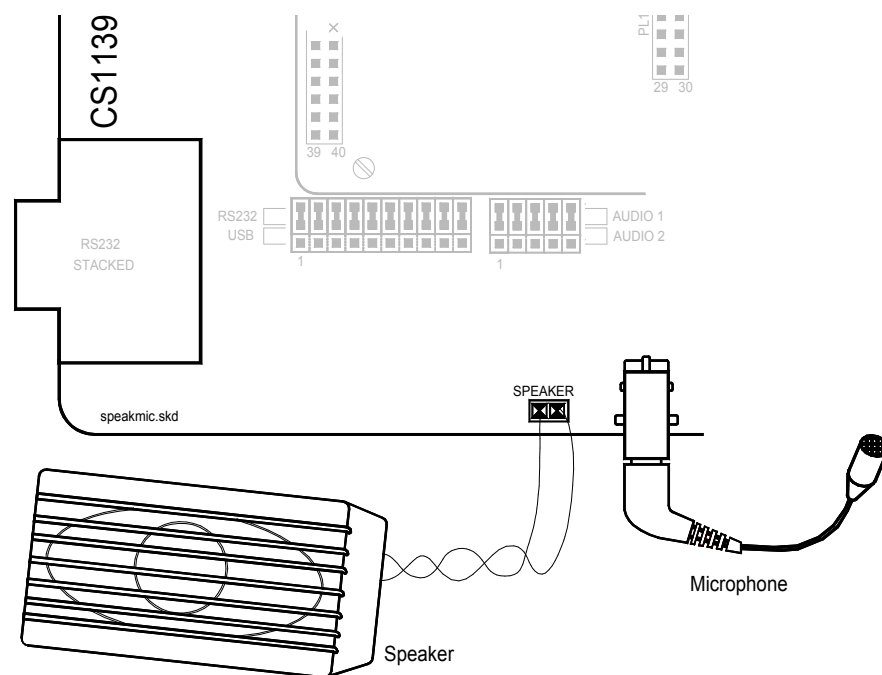


Figure 18: Speaker & Microphone case insertion



9.2.2. Speaker plus Headset

If you have chosen to connect the Speaker to *HIGH AF POWER* output, without having a stand-alone electret microphone, it is also possible to connect a standard *off-the-shelf Headset* to SO401 without any problem, as shown in the figure 18: the AF output signal will be heard on both Speaker and Earpiece.



WARNING:

You must use the right coil impedance depending from audio output you want to use.

If you sort out the LOW AF POWER solution connecting your Headset to SO401, the coil impedance **must be at least $16\Omega@1\text{KHz}$ or higher**.

If you sort out the HIGH AF POWER solution connecting your Speaker to PL401, the coil impedance **must be at least $8\Omega@1\text{KHz}$ or higher**

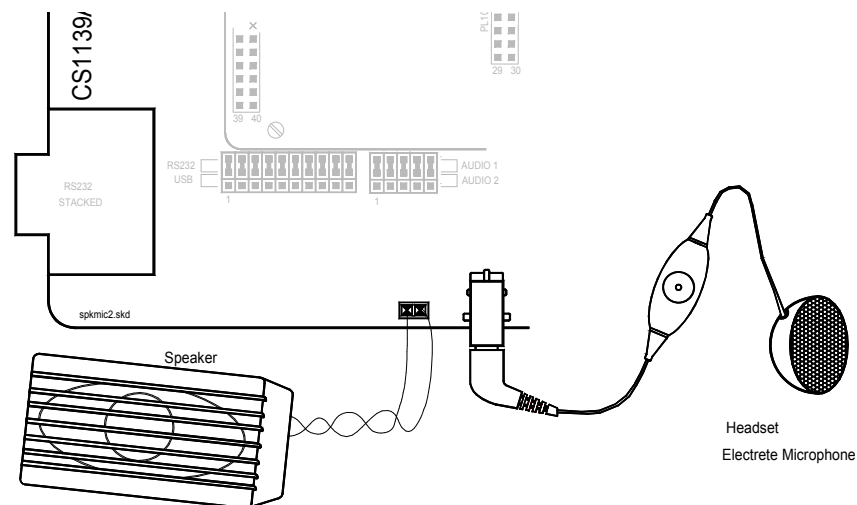


Figure 19: Speaker

Headset insertion

plus



10. Audio Accessories

The following tables show the suggested specification to obtain the best performance from *off-the-shelf* accessories.

10.1. Headset

Nominal sensitivity	-45dBV _{rms} /1Pa (+/- 3dB)
Line coupling	AC
Nominal Voltage	2V
Range of Using Voltage	(1÷10)V
Consumption Current	(150÷500) μ A
Impedance	2,2K Ω
Signal to Noise Ratio	56dB /1KHz/1Pa (A curve)
Inner EMI capacitor between terminals	10pF, 33pF

Table 2: Microphone electrical characteristics

Rated Input Power	5mW
Maximum Input Power	20mW
Coil Impedance	32 Ω $\pm$ 5 Ω @ 1kHz
SPL	95 $\pm$ 3 dB @ 1KHz/1mW sine wave
Resonance frequency (Fo)	< 350Hz
Useful Bandwidth	Fo ÷ 8000 Hz @ -3dB

Table 3: Earpiece electrical characteristics



10.2. Stand-alone microphone

Nominal sensitivity	-45dBV _{rms} /1Pa (+/- 3dB)
Line coupling	AC
Nominal Voltage	2V
Range of Using Voltage	(1÷10)V
Consumption Current	(150÷500) μA
Impedance	2,2KΩ
Signal to Noise Ratio	56dB /1KHz/1Pa /A curve
EMI capacitor between terminals	10pF, 33pF

Table 4: Microphone electrical characteristics

10.3. Speaker

Rated Input Power	500 mW
Maximum Input Power	1W
Coil Impedance	≥ 8Ω
SPL	≥ 85±3 dB @ 1KHz
Resonance frequency (Fo)	< 350Hz
Useful Bandwidth	Fo ÷ 8000 Hz @ -3dB

Table 5: Speaker electrical characteristics



11. Indication and services

11.1. Optical Indicators

11.1.1. Status Led

It is a debug aid that shows information on the network service availability and Call status.

LED status	Device Status
Permanently off	Device off
Fast blinking (period 1s, Ton 0,5s)	Net search / Not registered / turning off
Slow blinking (period 3s, Ton 0,3s)	Registered: full service
Permanently on	A call is active

Table 6: STAT_LED indications

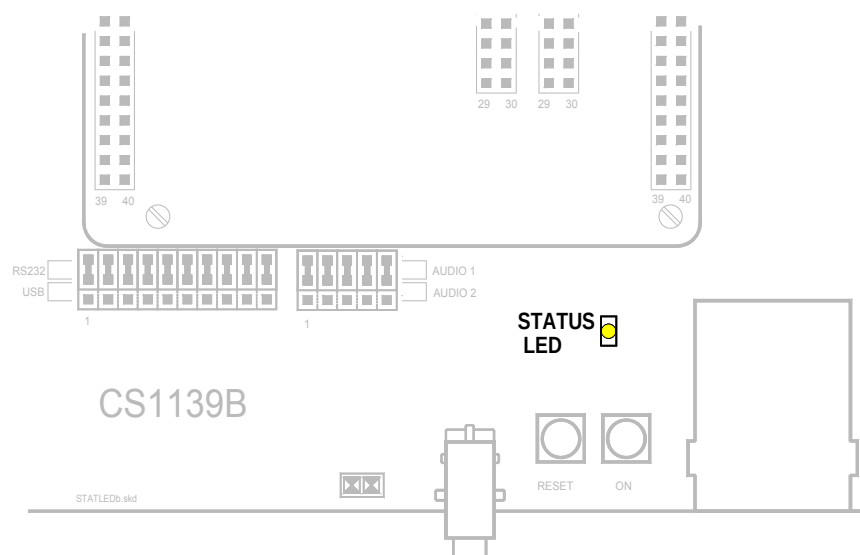


Figure 20: STAT_LED position



11.1.2. CHARGE Led

A yellow LED is used as *Charge In Act* Indicator, as explained in the following table.

CHARGE LED	Meaning
Always on	Start Charge/ Hugh current Charge in act
Always off	Low current Charge in act/Charge stop

Table 7: CHARGE LED indications

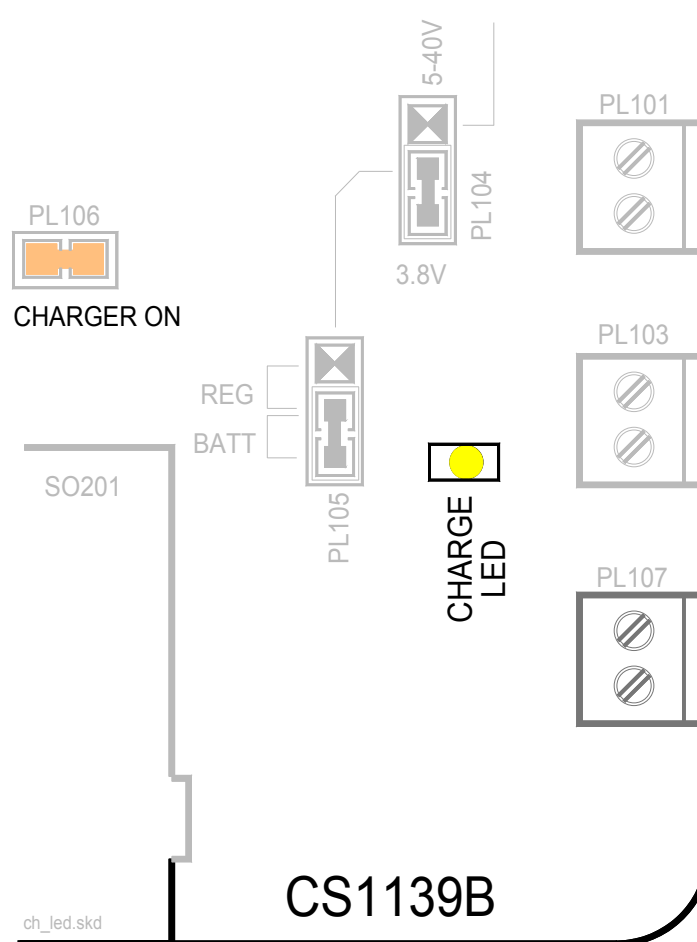


Figure 21: CHARGE LED position



11.2. Switches

You turn *On/Off* or *Reset* the EVK2 by 2 push buttons.

11.2.1. POWER ON Switch

Pressing for at least 2 seconds the *Power ON SWITCH*, you turn *On/Off* the whole **EVK2** and the Telit module in use: the *STAT_LED* starts to slowly blink (*ON state*) or stops to blink (*OFF state*).

11.2.2. RESET Switch

Whenever the RESET SWITCH is pressed, you could reset the Telit module in use. When the device is reset, it stops any operation without doing any detach operation from the network where it is registered and it reboots after the release of the Reset Switch. This behavior is not a proper shut down because any GSM device is requested to issue a detach request at turning off. For this reason the Reset pressing action must not be used to normally reboot/shutting down the device, but only as an emergency exit in the rare case the device remains stuck waiting for some network response. The RESET is internally controlled at start-up to achieve always a proper power-on reset sequence, so there is no need to control this pin on start-up. It may only be used to reset a device already on that is not responding to any command.

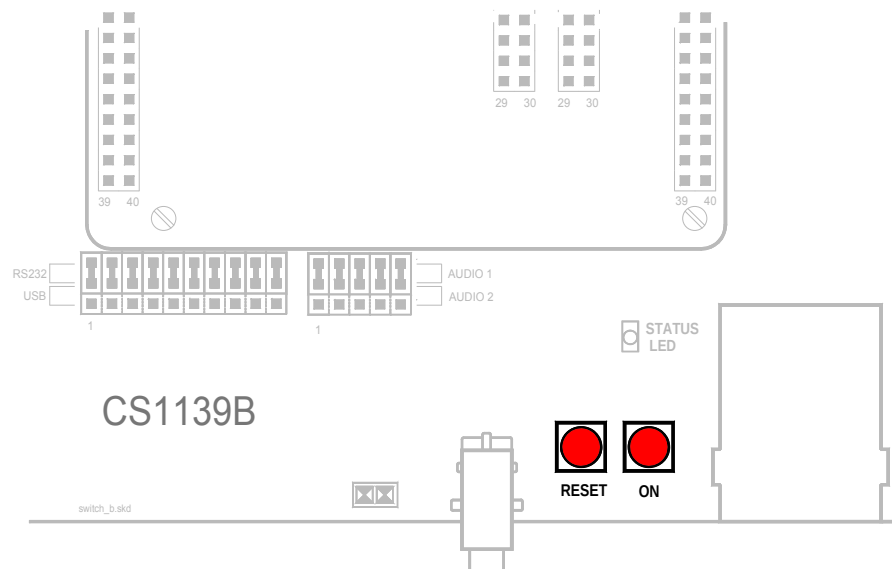


Figure 22: SWITCHES position



12. Connectors pinout

12.1. Motherboard to Module

The connections between CS1139B and every Telit module Interface Board are made through two *40 pin male* connectors. Theirs pin functions are listed in the following tables.

Pin	Signal	Type	Function
1	NC ¹		
2	TX_Trace	Digital Output	to RS232 or USB level translators
3	RX_Trace	Digital Input	from RS232 or USB level translators
4	IIC_SDA_HW	Digital In/Out	from/to USB level translators
5	GND	DC voltage	Power
6	IIC_SCL_HW	Digital Input	from USB level translators
7	SSC0_CLK	Digital Output	to USB level translators
8	SSC0_MTSR	Digital In/Out	from/to USB level translators
9	SSC0_MRST	Digital In/Out	from/to USB level translators
10	NC		
11	GND	DC voltage	Power
12	GND	DC voltage	Power
13	GND	DC voltage	Power
14	GND	DC voltage	Power
15	C109/DCD	Digital Output	to RS232 or USB level translator
16	C104/RXD	Digital Output	to RS232 or USB level translator
17	C103/TXD	Digital Input	from RS232 or USB level translator
18	C108/DTR	Digital Input	from RS232 or USB level translator
19	GND	DC voltage	Power
20	C107/DSR	Digital Output	to RS232 or USB level translator
21	C105/RTS	Digital Input	from RS232 or USB level translator
22	C106/CTS	Digital Output	to RS232 or USB level translator
23	C125/RING	Digital Output	to RS232 or USB level translator
24	NC		
25	GND	DC voltage	Power
26	GND	DC voltage	Power
27	GND	DC voltage	Power
28	GND	DC voltage	Power
29	EAR_HF+	AC Out Voltage	Audio
30	EAR_MT-	AC Out Voltage	Audio
31	EAR_HF-	AC Out Voltage	Audio

¹ DO NOT CONNECT



Telit EVK2 User Guide

1vv0300704 Rev.13- 2012/06/25

32	EAR_MT+	AC Out Voltage	Audio
33	AXE	DC voltage	INT/EXT Switching
34	MIC_HF-	AC In Voltage	Audio
35	MIC_MT+	AC In Voltage	Audio
36	MIC_HF+	AC In Voltage	Audio
37	MIC_MT-	AC In Voltage	Audio
38	GND	DC voltage	Power
39	GND	DC voltage	Power
40	GND	DC voltage	Power

Table 8: PL201-CS1139B

Pin	Function	Type	NOTES
1	VBATT	DC voltage	Power
2	VBATT	DC voltage	Power
3	VBATT	DC voltage	Power
4	VBATT	DC voltage	Power
5	GND	DC voltage	Power
6	GND	DC voltage	Power
7	GND	DC voltage	Power
8	GND	DC voltage	Power
9	CHARGE	DC voltage	Power
10	CHARGE	DC voltage	Power
11	GND	DC voltage	Power
12	GND	DC voltage	Power
13	GND	DC voltage	Power
14	GND	DC voltage	Power
15	ON_OFF*	DC voltage	Pull up to VBATT
16	NC		
17	RESET*	DC voltage	Module Reset
18	NC		
19	NC		
20	NC		
21	STAT_LED	Open Collector	Status Indicator LED
22	NC		
23	NC		
24	NC		
25	GND	DC voltage	Power
26	GND	DC voltage	Power
27	GND	DC voltage	Power
28	GND	DC voltage	Power
29	NC		
30	NC		
31	SIMIO	3V Only	SIM Data I/O
32	SIMCLK	Digital Signal	SIM Clock
33	SIMRST	DC voltage	SIM Reset



Telit EVK2 User Guide

1vv0300704 Rev.13- 2012/06/25

34	SIMVCC	DC voltage	SIM Power
35	SIMIN	DC voltage	SIM inside detector
36	NC		
37	NC		
38	GND	DC voltage	Power
39	GND	DC voltage	Power
40	GND	DC voltage	Power

Table 9: PL202-CS1139B



13. Module Interface Boards

13.1. Generality

You can use your **EVK2** with see **APPLICABILITY LIST** Telit modules fitted on its own *Interface Board*; all connections are made through *2x40 contacts* connectors.

It's possible to use these *Interface Boards* also in stand-alone mode, inserting the “*not mounted*” components (*related to RESET BUTTON, ON BUTTON, SIM HOLDER and STATUS LED functions*) plus the use of an external *level translator* circuit.

For more information refer to Telit Product Description

13.2. Short Description

The interface boards convert the module connection technology (*board-to-board or BGA soldering*) into a PTH pin connector. The part of the basic interfaces is served by the motherboard, whereas specific interfaces according to the type of the module (*antenna, general purpose inputs/outputs GPIO, ADC/DAC, UART*) are available on the adapter board to connect it to the user applications, extension boards, measurements equipment or other tools.

13.3. Further Accessories for GPS version

When test the GPS products, besides the content of the single kits you need the accessories listed in below table.

SMA/MMCX cable adapter	Module under test	Interface Board	GPS Antenna
1ff1400073tlb		P/N	1rr0100071tlb
1	GM862-GPS	3990250670	1
-	GE863-GPS	3990250671	1
-	GE864-GPS	TBD	1
-	SE867-AGPS	TBD	1
-	HE910	3990250829	1

Table 11. GPS versions further accessories.



14. GM862 Interface

This board allows easily interfacing the module with the EVK2 and testing its functionalities; any version of GM862 can be insert.
No settings are needed.

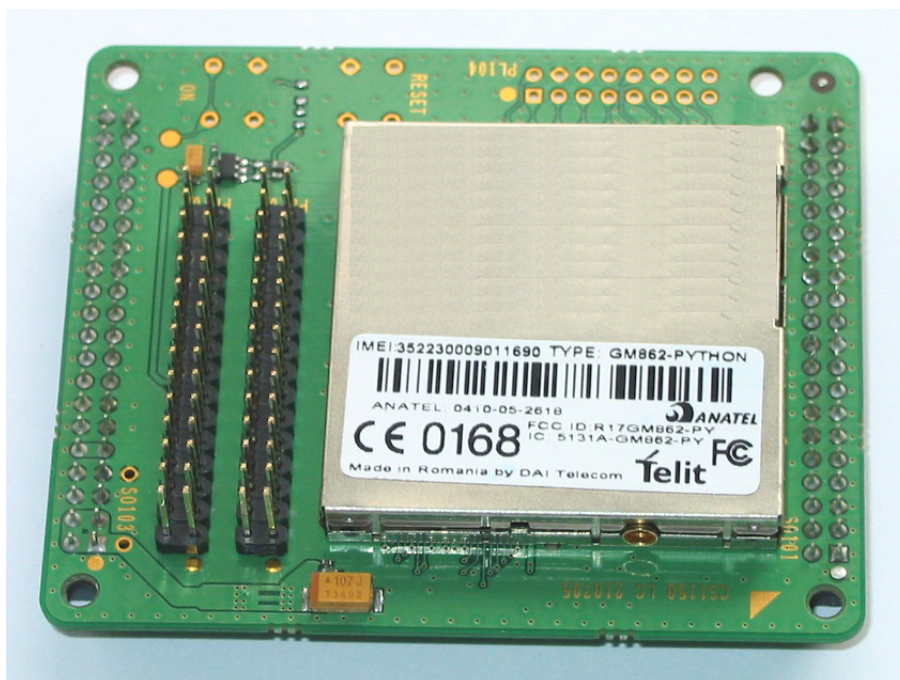


Figure 23. GM862 Interface Board

14.1. Stand-alone setup

If you need to use the interface out of EVK2 (*Stand-alone* setup) you have to mount the following missing components:

RESET Button
ON Button;
STATUS LED and its load resistance.



14.2. Interface connectors

The following connectors are available:

2 male connectors (30 pins each one: PL102, PL103), on which it is possible to connect external devices like user's application, Telit extension boards, measurements equipment or other tools

2 female connectors (40 pins each one: SO101, SO102), to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines).

14.3. Content of the kit

Please check out the contents of your interface kit; if any of the items is missing, please contact your supplier.

Description	Quantity
GM862 INTERFACE	1
ASSEMBLED CABLE L-250 RG174 TERMINALS SMA F & MMCX 90 M	1

Table 12.



15. GE863 Interface

This board allows easily interfacing the GE863 modules with the EVK2 and testing their functionalities;



Figure 24. GE863 Interface Boards: GE863-QUAD or GE863-SIM (at left) and GE863-GPS (at right)

15.1. Stand-alone setup

If you need to use the interface out of EVK2 (*Stand-alone setup*) you have to mount also:

- the SIMCARD Holder;
- the RESET Button
- the ON Button;
- the STATUS LED and its load resistance.



15.2. Content of the kits

Please check out the contents of your interface kit; if any of the items is missing, please contact your supplier.

15.2.1. GE863-PY/QUAD version

Description	Quantity
GE863 INTERFACE BOARD	1
2 PIN JUMPER FEMALE CONN	2

Table 13

15.2.2. GE863-GPS version

Description	Quantity
GE863-GPS INTERFACE BOARD	1
2 PIN JUMPER FEMALE CONN	2

Table 14

15.2.3. GE863-SIM version

Description	Quantity
GE863-SIM INTERFACE BOARD	1
2 PIN JUMPER FEMALE CONN	2

Table 15

15.3. Interface connectors

The following connectors are available in any version:

GSM RF connector (*SMA Female*)

2 male connectors (4 pins each one: PL101, PL102) to select the Serial port configuration

2 female connectors (40 pins each one: SO101, SO106) to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines)

2 male connectors (*30 pins each one: PL103, PL104*), on which it is possible to connect external devices like user's application, Telit extension boards, measurements equipment or other tools

15.4. Additional components for GPS version

The following components are available only in GPS version (P/N 3990250671):



GPS RF connector (*SMA Female*)
USB B-type connector and its circuitry (*see schematic 30276SE11151A*)

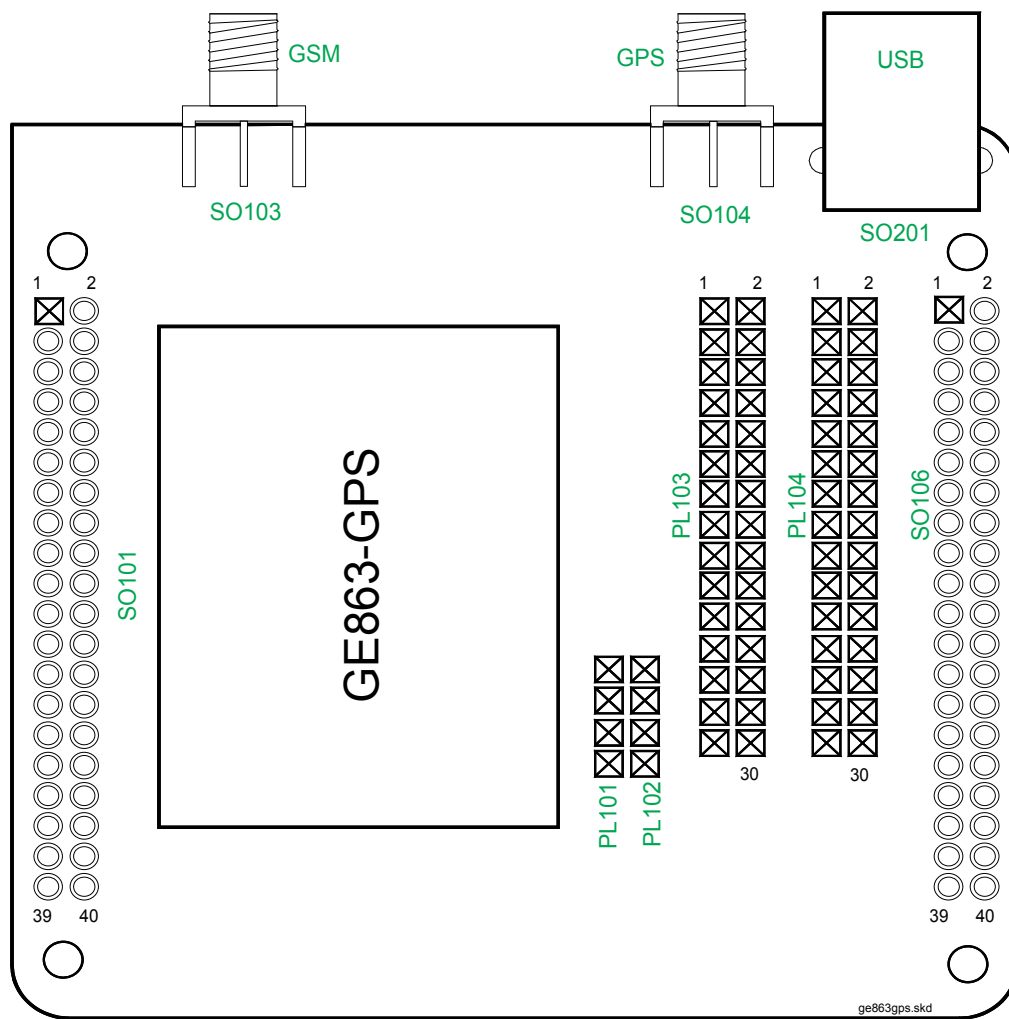


Figure 25: Connectors displacement on GE863-GPS

15.5. USB connector

The USB interface provides 2 serial ports that are related to the *NMEA* serial port and *SIRF-Binary* serial port of GE863-GPS module.

It is possible to select if the *SIRF Binary* serial port will be available on the USB connector or directly connected to the second serial port of the modem (**CONTROLLED MODE**).

For setting refer to paragraphs 16.7.1, 16.7.2.1, 16.7.2.2.



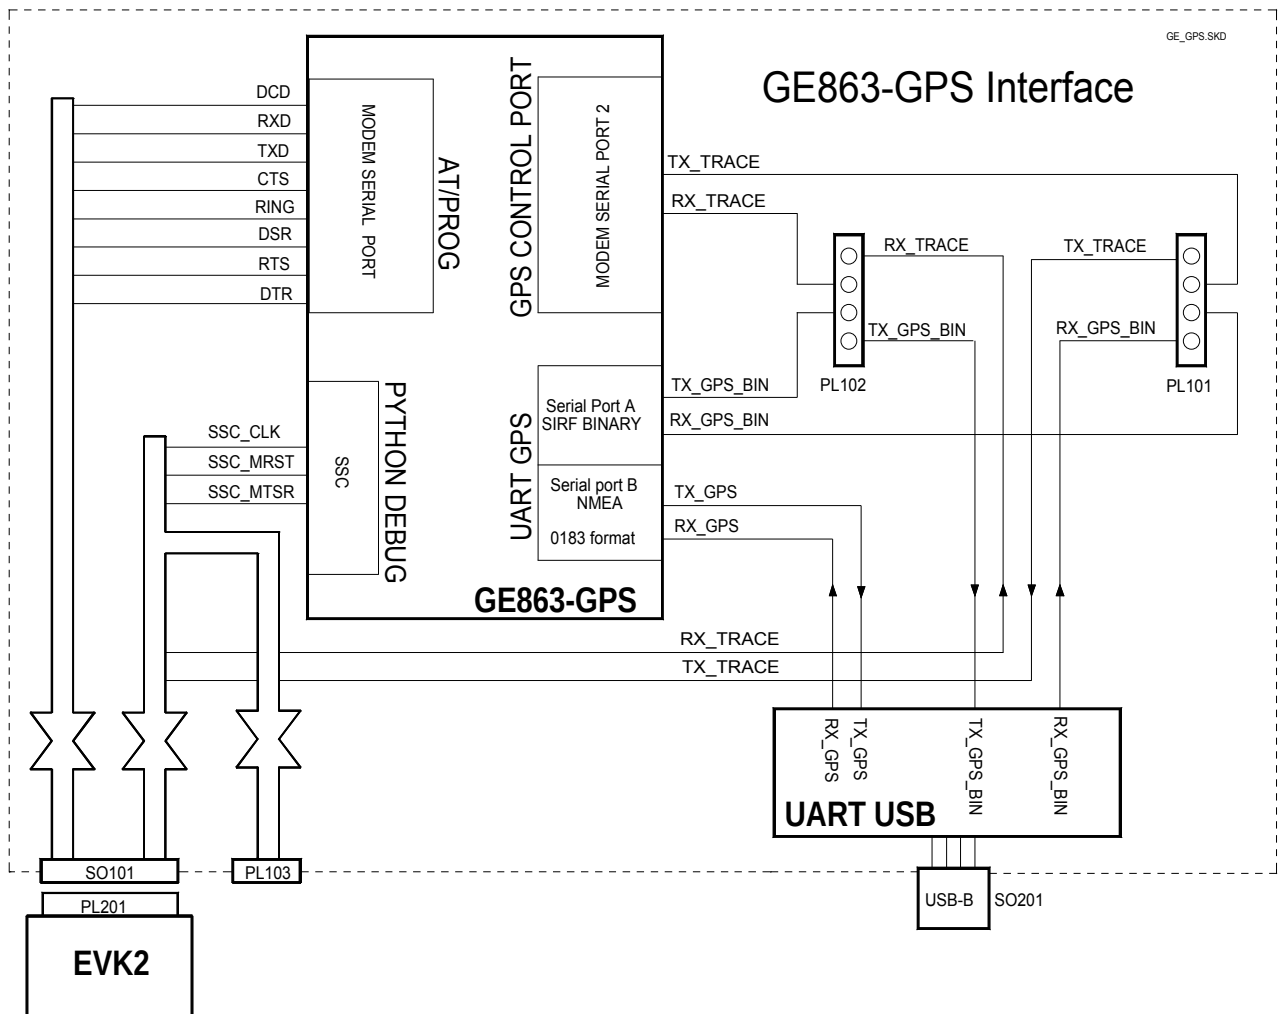


Figure 26: GE863-GPS Serial ports block diagram

15.6. Serial port configuration

To switch the serial lines you must short-circuit the PL101-PL102 connectors by 2 contacts jumpers.

15.6.1. GE863-PY/QUAD

The 2 contacts jumpers have to be fitted between **pin1&pin2** of PL101-PL102 connectors. This carries out the *Python Debug Port* on Trace Port of EVK2.



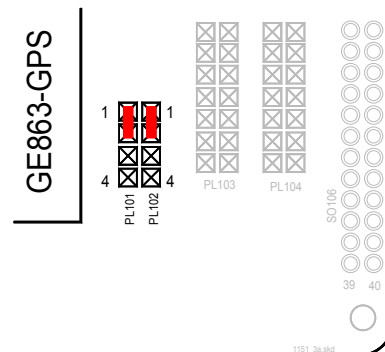


Figure 27: Jumpers setting for GE863-PY/QUAD

15.6.2. GE863 – GPS

The 2 contacts jumpers have to be fitted between **pin2&pin3** or **pin3&pin4** of PL101-PL102 connectors.

“CONTROLLED MODE”

This set the *SIRF Binary* to serial port of the modem. (*Typical application Design*)

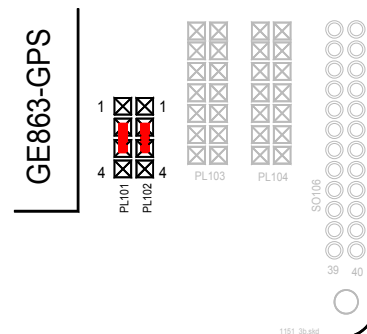


Figure 28: Jumpers setting for SIRF BINARY port connected to MODEM port 2



NOTE: All AT GPS commands are available in this configuration



“SEPARATED SERIAL PORT”

This set the *SIRF Binary* available on the USB connector.

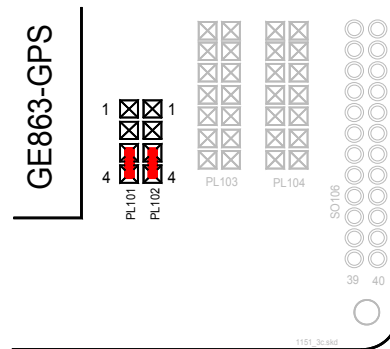


Figure 29: Jumpers setting for SIRF BINARY port available on USB connector



NOTE:

In this configuration some AT GPS commands are not available. Refer to AT Commands Reference User Guide.

15.7. ANTENNA connectors

15.7.1. GPS ANTENNA connector

An active GPS antenna should be connected to SO104; the GPS section provides the DC feeding.



WARNING:

Don't connect a GSM antenna on this connector

15.7.2. GSM ANTENNA connector

A GSM antenna should be connected to SO103.

15.7.3. RFU ANTENNA connector

On PCB there is the mounting possibility of a further RF connector (SO105); it is related to future implementation.



16. GE864 Interface

This board allows easily interfacing the GE864 modules with the EVK2 and testing their functionalities;
No settings are needed.



Figure 30. GE864 Interface Board

16.1. Stand-alone setup

If you need to use the interface out of EVK2 (*Stand-alone* setup) you have to mount the following missing components:

- the SIMCARD Holder;
- the RESET Button
- the ON Button;
- the STATUS LED and its load resistance.



16.2. Interface connectors

The following connectors are available:

2 male connectors (30 *PTH pins each one: PL102, PL103*), by which it is possible to connect external devices, user's application, Telit extension boards, measurements equipment or other tools;

2 female connectors (40 *PTH pins each one: SO101, SO102*), to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines);

16.3. Content of the kit

Please check out the contents of your interface kit; if any of the items is missing, please contact your supplier.

Description	Quantity
GE864 INTERFACE	1

Table 16



17. GE864-GPS Interface

This board allows testing the functionalities and performance of the GE864-GPS module.

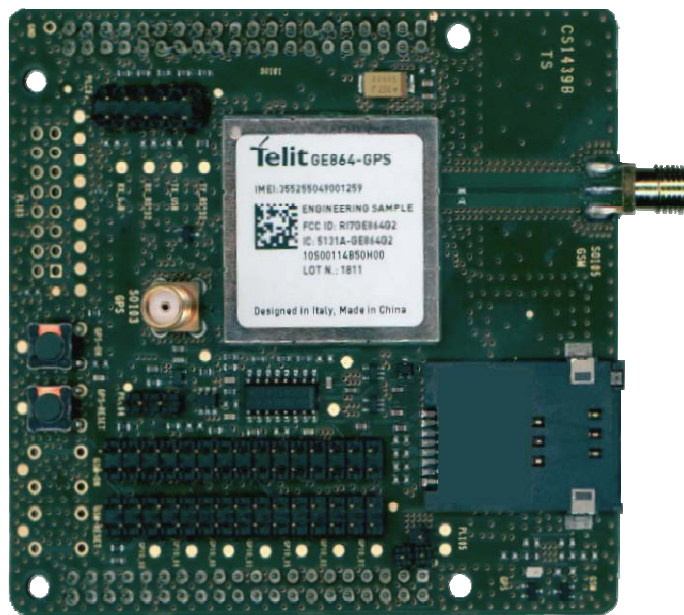


Figure 31. GE864-GPS Interface Board

17.1. Part numbering

This board comes in three different configurations, each characterized by its own part number, depending on the module it contains. In the following paragraphs we will refer to them using an identifier according to the table below:

Part number	Identifier	Module mounted
3990250820	cs1439b	cs1479
3990250821	cs1439b-A	cs1446
3990250822	cs1439b-B	cs1485a

Table 17

17.2. Stand-alone setup



The interface can be used without the EVK2, in this case the following components have to be soldered on the board:
the GSM-RESET button
the GSM-ON button
the STATUS led and its load resistor.

17.3. Interface connectors

The following connectors are available:

2 male connectors (30 PTH pins each: PL101 and PL102), to connect external devices, user's applications, Telit extension boards, measurement equipment or other tools; PL102 can also be used to select particular configurations between the GSM module's GPIOs and the GPS module

2 female connectors (40 PTH pins each one: SO101 and SO104), to connect the interface to the EVK2 mother board (power supply lines, serial in/out lines, audio in/out lines)

1 male connector (3 PTH pins: PL104), to select an enable signal for the external GPS LNA

1 male connector (2 PTH pins: PL105), in order to allow inserting an ammeter in series with the supply, in order to monitor the module's current consumption

1 GSM RF connector (SMA Female: SO105)

1 GPS RF connector (SMA Female: SO103)

1 JTAG connector (PL103, not mounted)

1 male connector (12 PTH pins: PL201), to select one of the available configurations for the Serial and USB ports.

17.4. Contents of the kit

Please check out the contents of your interface kit. If any of the following items is missing, contact your Telit supplier.

Description	Quantity
GE864-GPS INTERFACE	1
JUMPERS	13

Table 18



17.5. Power supply

The module (but not the whole interface) receives its power supply from PL105: this jumper must always be plugged in, except when a series measurement instrument is needed.

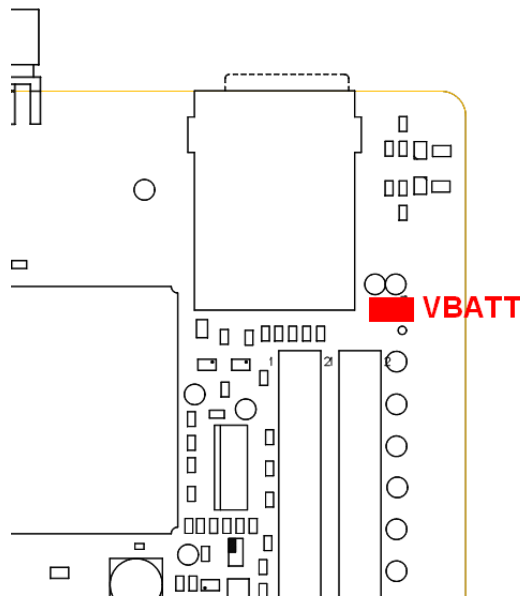


Figure 32. Jumper for VBATT.

17.6. GPS external LNA enable signal

The module contains an internal LNA for the GPS antenna that is enabled by default. The user can though decide to use an external LNA: this option is selected by means of a software command, which puts the internal LNA in a low gain mode and provides an additional signal to enable the external LNA. The interface can provide a bias for the external LNA, and the user can choose whether to enable it by this signal or to leave it always enabled, by means of a jumper on PL104, as shown in the picture below.



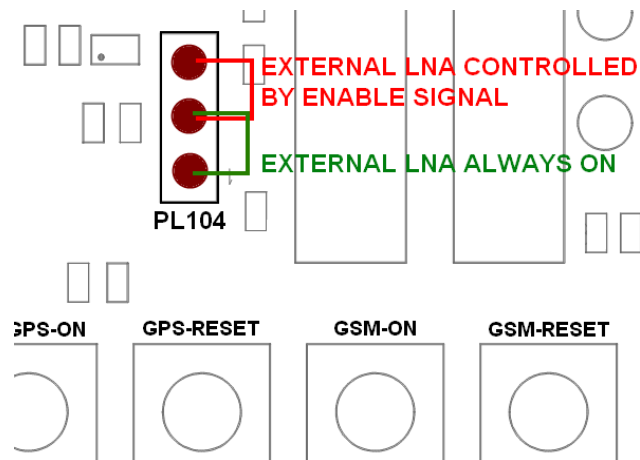


Figure 33. Jumper on PL104.

17.7. Serial port configuration

By means of proper jumper connections on PL201, three different configurations for serial outputs can be selected. These configurations are mutually exclusive.

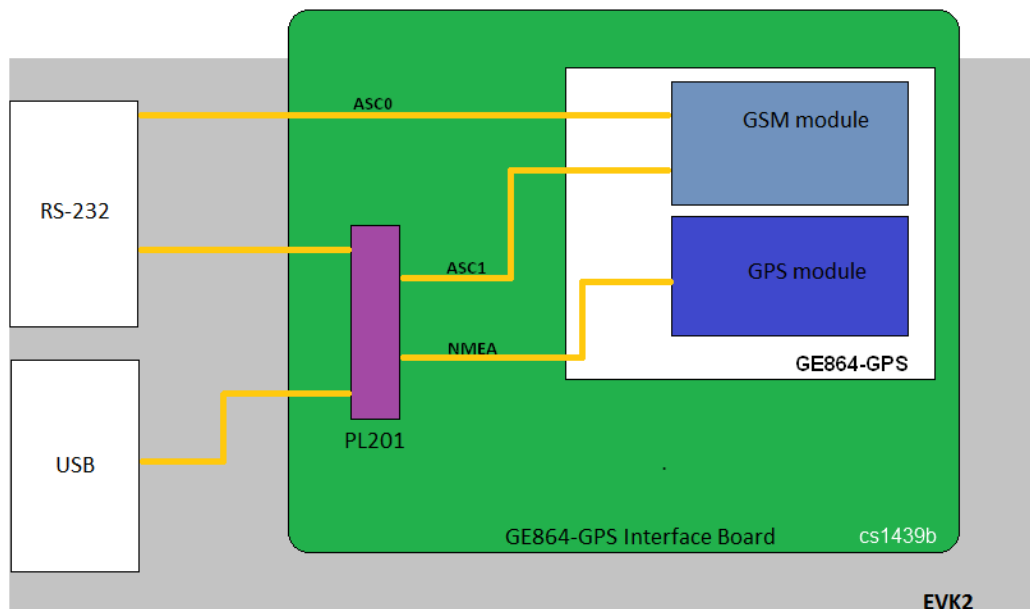


Figure 34. GE864-GPS Interface Board serial connections



17.7.1. ASC1 to RS-232

This configuration connects the ASC1 UART to the Trace serial connector of the EVK2.

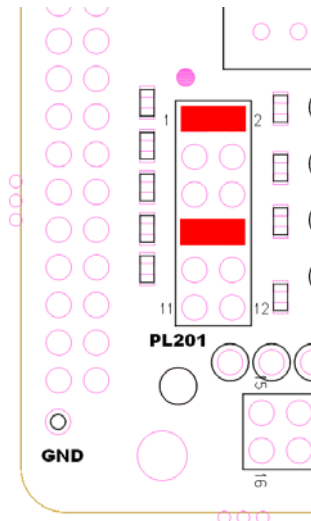


Figure 35. ASC1 to RS-232 (Trace) configuration

17.7.2. GPS to ASC1 (internal host controlling configuration)

This configuration directly connects the host GSM module to the GPS receiver, thus setting the GPS receiver in Controlled Mode.

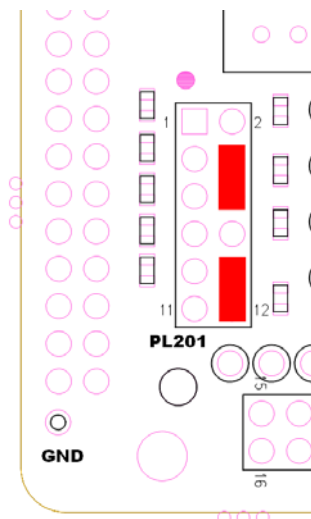


Figure 36. GPS to ASC1 configuration





WARNING:

Other than the ASCII UART, the user must also connect the host module's GPIOs to the corresponding signals of the GPS receiver (as explained in the next paragraphs).

17.7.3. GPS to RS-232 (external host controlling configuration)

This configuration allows sending the GPS output to the Trace serial connector of the EVK2.

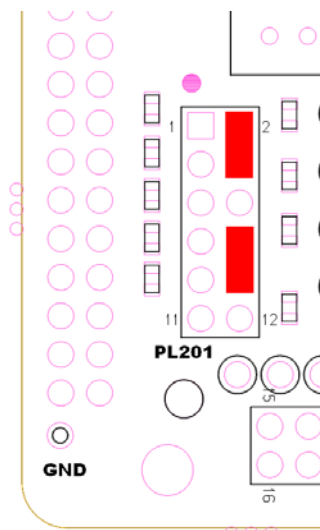


Figure 37. GPS to RS-232 (Trace) configuration

17.7.4. GPS to USB

The NMEA sentences can be redirected to EVK2's USB port by setting PL201 as explained in the Figure 37, i.e. connecting the NMEA line with the RS-232, and at the same time setting the EVK2 serial line on USB Mode, as shown in Paragraph 7.1 of this document.



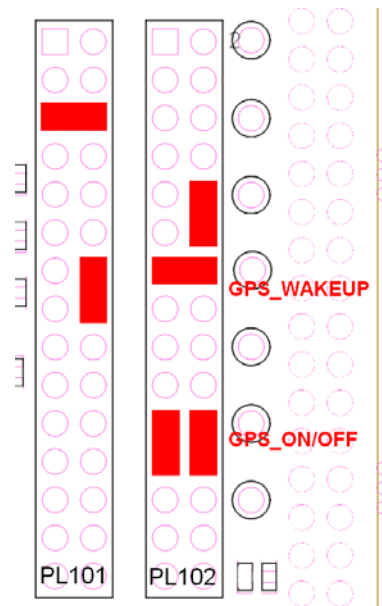


Figure 39. Settings for PL101 and PL102: internal host, **cs1439b** and **cs1439b-B**

Note that jumper settings are detailed in the pictures above.

The signal connected to **pin10** of PL102 is no longer available, and it is recommended to tie it to ground by plugging a jumper between **pin10 & pin12** of PL102.

17.8.2. External host controlling configuration

When an external host is used to drive the GPS module, two different cases have to be considered:

cs1439b-A



cs1439b and **cs1439b-B**

Refer to the beginning of this chapter for the correspondence between board part number and mounting options.

Two jumpers must be plugged, between **pin14 & pin16** of PL101 and **pin10 & pin12** of PL102. Additionally, the host GPIOs must be connected to PL102 as shown in the pictures below.

Note that in this configuration the signal on **pin10** of PL102 is no longer available and it must be connected to ground by plugging a jumper on **pin10 & pin12** of PL102.





17.9. Antenna connectors

17.9.1. GSM antenna connector

A GSM antenna must be connected to SO105.

17.9.2. GPS antenna connector

A GPS antenna must be connected to SO103.



WARNING:

Don't connect a *GSM* antenna on this connector



18. GE865 – SE867 AGPS Interface

This board allows testing the functionalities and performance of the GE865 and SE867 modules interconnected according to Telit guidelines.



Fig.38. GE865/SE867-AGPS Interface Board

18.1. Stand-alone setup

The interface can be used without the EVK2, in this case the following components have to be soldered on the board:

- the RESET button
- the ON button
- the STATUS led and its load resistor.



18.2. Interface connectors

The following connectors are available:

- 2 male connectors (30 PTH pins each: PL101 and PL102), to connect external devices, user's applications, Telit extension boards, measurement equipment or other tools
- 2 female connectors (40 PTH pins each one: SO101 and SO104), to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines)
- 1 male connector (5 PTH pins: PL104), which makes available in one place all GPIOs related to PCM
- 1 GSM RF connector (SMA Female: SO103)
- 1 GPS RF connector (SMA Female: SO201)
- 1 JTAG connector (PL103, not mounted)
- 2 male connectors (2 PTH pins: PL203, PL205, not mounted), which allow to manually control some functions, therefore freeing the corresponding GPIOs for other uses
- 1 male connector (2 PTH pins: PL204) by means of which the user can manually disable VIN_GPS
- 4 male connectors (2 PTH pins: PL202, PL207; 3 PTH pins: PL201, PL206) to select one particular UART connection configuration.

18.3. Contents of the kit

Please check out the contents of your interface kit. If any of the following items is missing, contact your Telit supplier.

Description	Quantity
GE865/SE867-AGPS INTERFACE	1
JUMPERS	5

Table 19



By means of proper jumper connections on PL201, PL202, PL206, and PL207, three different configurations for serial outputs can be selected.

This configuration is achieved by plugging a female jumper connector on **pin1 & pin2** of both PL201 and PL206. It allows to connect the GE865 UART with SE867-AGPS UART, thereby putting the board in the so-called controlled mode. No connection with the EVK2 RS-232 Trace is present.

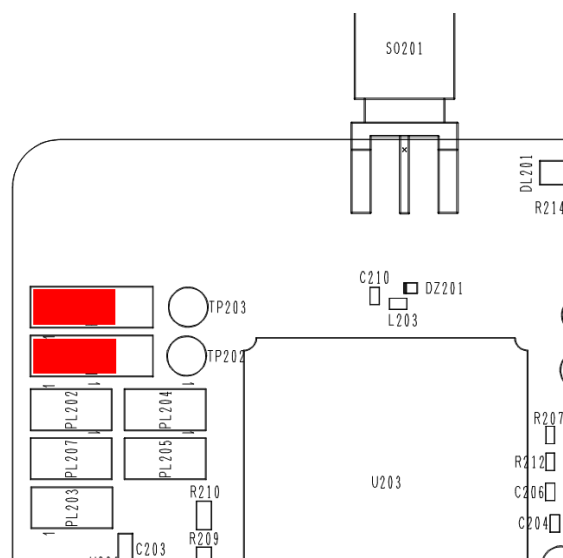


Figure 43. Jumpers in controlled mode configuration.



18.3.2. GSM to Trace

This configuration is realized by plugging a female jumper connector on **pin2 & pin3** of both PL201 and PL206. It allows redirecting the GE865 UART to the EVK2 RS-232 Trace. No connection with the SE867 UART is present.

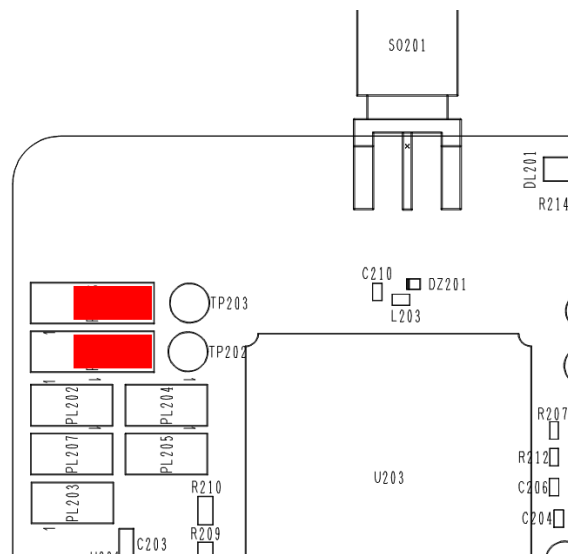


Figure 44. Jumpers in GSM to Trace configuration.



18.3.3. GPS to Trace(external host controlling configuration)

This configuration is achieved by plugging two female jumper connectors on PL202 and PL207. It allows redirecting the SE867 UART to the EVK2 RS-232 Trace. No connection with the GE865 UART is present.

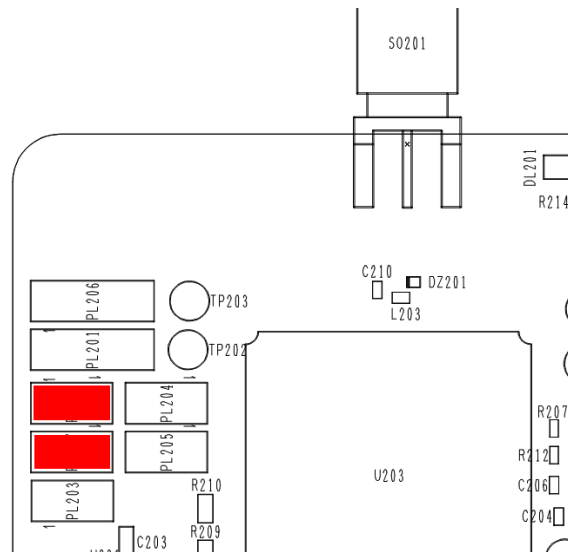


Figure 45. Jumpers in GPS to Trace configuration.

18.4. Antenna connectors

18.4.1. GSM antenna connector

A GSM antenna must be connected to SO103.

18.4.2. GPS antenna connector

A GPS antenna must be connected to SO201.



WARNING:

Don't connect a *GSM* antenna on this connector



19. GE865 – JF2 Interface

This board allows testing the functionalities and performance of the GE865 and JF2 modules interconnected according to Telit guidelines.

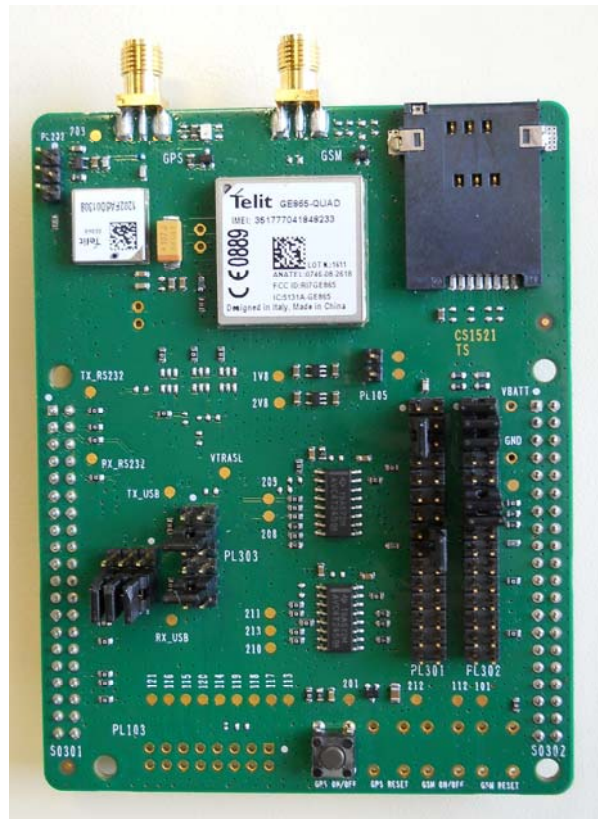


Figure 46. GE865/JF2 Interface Board.

19.1. Stand-alone setup

The interface can be used without EVK2 and in this case the following components have to be soldered to the board:

- RESET button
- GSM ON/OFF button
- GSM STATUS led and its load resistor



19.2. Interface connectors

The following connectors are available:

- 2 male connectors (30 PTH pins each: PL301 and PL302), to connect external devices, user's applications, Telit extension boards, measurement equipment or other tools; PL301 can also be used to select particular configurations between the GSM module's GPIOs and the GPS module
- 2 female connectors (40 PTH pins each one: SO301 and SO302), to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines)
- 1 GSM RF connector (SMA Female: SO105)
- 1 GPS RF connector (SMA Female: SO201)
- 1 JTAG connector (PL103, not mounted)
- 1 male connector (3 PTH pins: PL202), to select an enable signal for the external GPS LNA,
- 1 male connector (12 PTH pins: PL303), to select one of the available configurations for the Serial and USB ports.
- 1 male connector (2 PTH pins: PL105), that can be used to insert an ammeter in series with the supply, in order to monitor the module's current consumption,
- 1 male connector (9 PTH pins: PL304), in order to set the data format between USB or SSC0 lines to send to EVK2.

19.3. Contents of the kit

Please check out the contents of your interface kit. If any of the following items is missing, contact your Telit supplier.

Description	Quantity
GE865/JF2 INTERFACE	1
JUMPERS	15

Table 20

19.4. Power supply

The GE865 module (but not the whole interface) receives its power supply from PL105: this jumper must always be plugged on except when a series measurement instrument is needed.



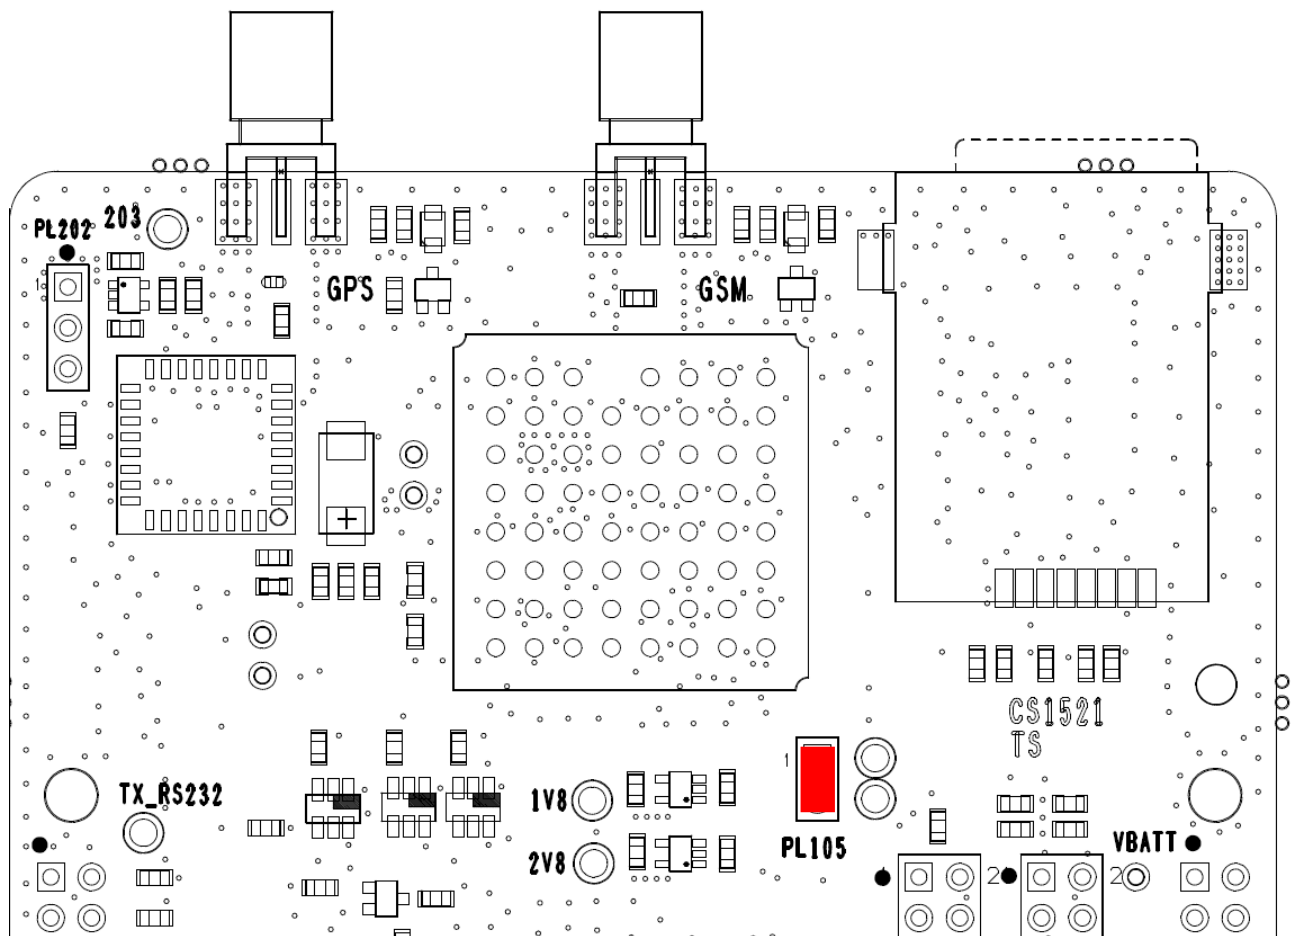



Figure 47. Jumper for VBATT.

19.5. GPS external LNA enable signal

The module contains an internal LNA for the GPS antenna.

The user can though decide to use an external LNA: this option is selected by means of a software command, which puts the internal LNA in a low gain mode and provides an additional signal to enable the external LNA. The interface can provide a bias for the external LNA, and the user can choose whether to enable it by this signal or to leave it always enabled, by means of a jumper on PL202, as shown in the picture below.





In order to use the External LNA controlled by the GE865 signal the user musts insert a jumper in pins 14-16 of PL301.



19.6. Serial port configuration

By means of proper jumper connections on PL303, it is possible to choose different configurations for serial or USB outputs. These configurations are mutually exclusive.

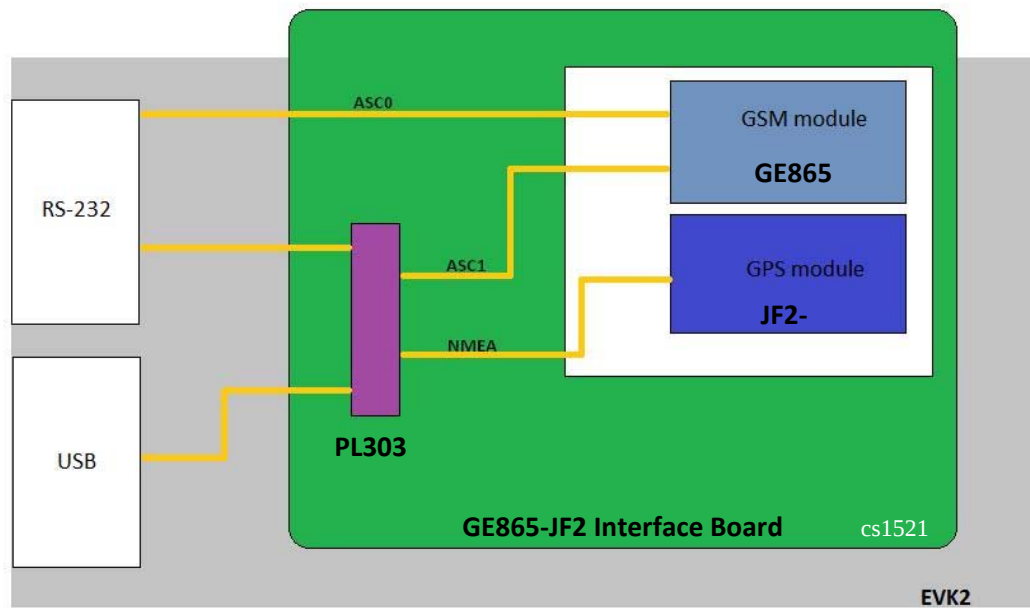


Figure 49. GE865-JF2 Interface Board serial connections

19.7. GSM to Trace

This configuration connects the GSM to the RS232 serial connector of the EVK2.



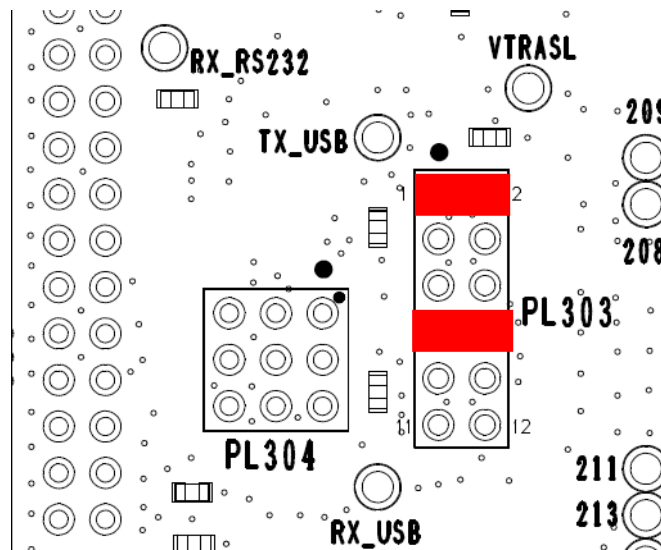


Figure 50.GSM to RS-232 (Trace) configuration

19.8. GPS to Trace

This configuration allows sending the GPS output to the Trace serial connector of EVK2 by means of transceivers.

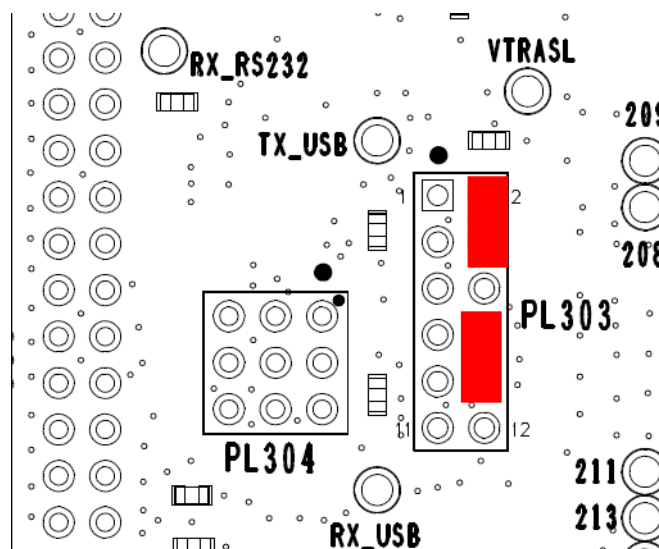


Figure 51.GPS to RS232 (Trace)



19.9. GSM to USB

This configuration connects the GSM to the USB connector of the EVK2.

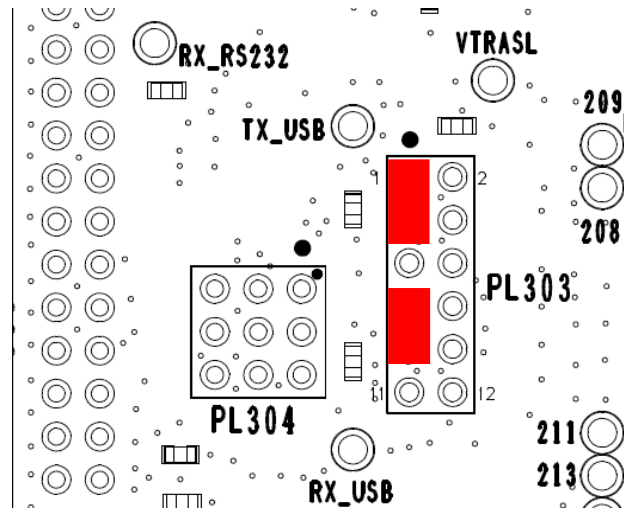


Figure 52.GSM to USB

19.10. GPS to USB

The NMEA sentences can be redirected to the EVK2's USB port by setting the PL303 as explained in the Figure 53, i.e. connecting the NMEA line with the RS-232, and at the same time setting the EVK2 serial line on USB mode, as showed in Paragraph 7.1 of this document.

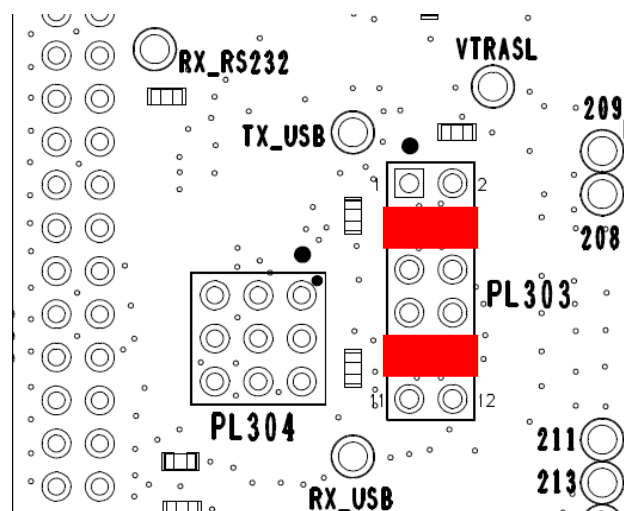


Figure 53.GPS to USB



19.11. GPS to GSM (internal host controlling configuration)

This configuration directly connects the host GSM module to the GPS receiver, thus setting the GPS receiver in Controlled Mode.

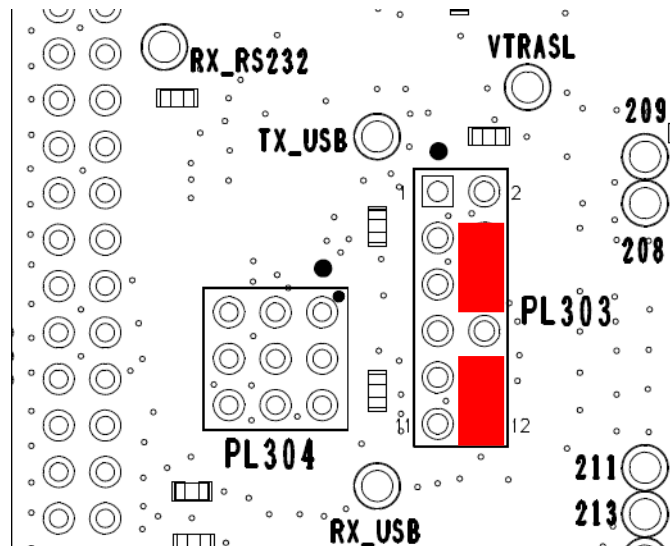


Figure 54. GPS to GSM configuration

19.12. GPIO settings

The interface allows choosing among different options for driving the GPS control signals:

- Using the GPIOs of the GSM module
- Using an external host
- Manually controlling the signals by plugging jumpers.

The last option is not available for every signal and every configuration; please refer to the schematics of the interface for more details.

The choice among the options can be made by PL301 and PL302, as detailed below.

19.12.1. Internal host controlling configuration

The following settings on PL301 and PL302 allow selecting the internal host configuration.



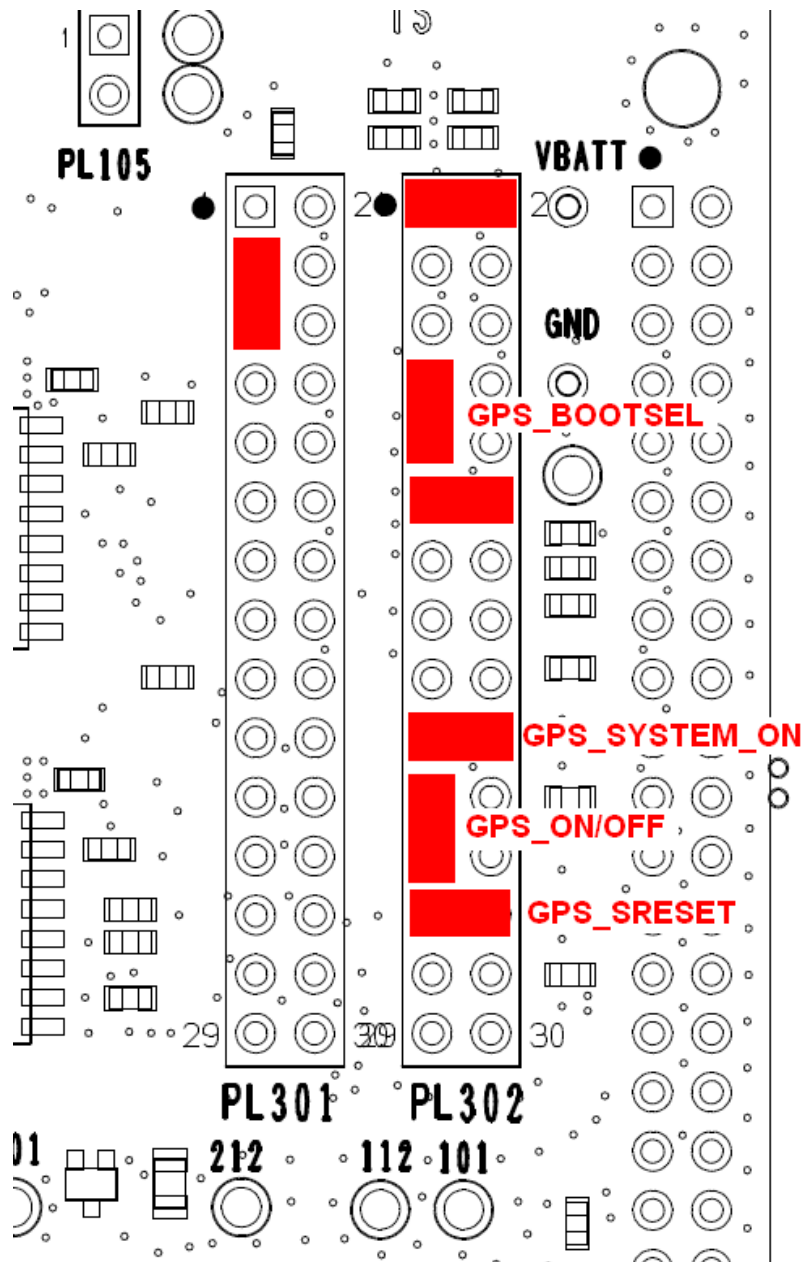


Figure 55.Settings for PL301 and PL302: internal host controlling

19.12.2. External host controlling configuration

The following settings on PL301 and PL302 allow selecting the external host configuration.



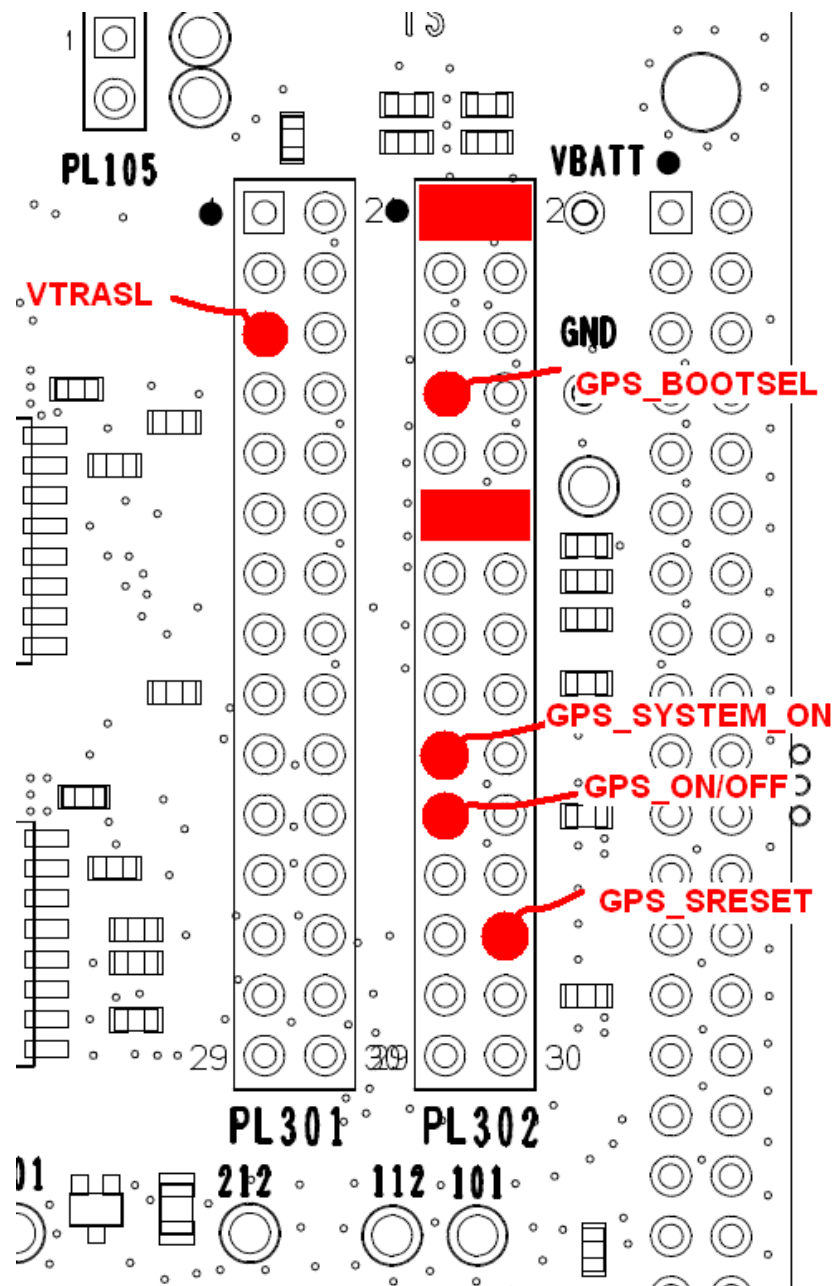


Figure 56.Settings for PL301 and PL302: external host.

19.13. GPS serial interface setting

GPS module has the capability to operate in serial UART mode, SPI mode or I2C mode depending upon how the JF2 GPIO6 and GPIO7 pins are strapped at power up. In the table below is shown the configuration set in PL302 to select the type of serial interface:



MODE	GPS GPIO n.6	GPS GPIO n.7
UART	1-2 pins shorted in PL302	Float
I2C	Float	15-16 pins shorted in PL302
SPI	Float	Float

Table 21

If you connect JF2 module with GE865 module you must use UART configuration. Using an external host, if you want use I2C configuration, you need to plugging on PL302 two jumpers in positions 3-4 and 5-6 in order to connect pull-ups in SDA and SCL lines.

19.14. MEMS Sensor/EEPROM Interface

The DR I2C port of JF2 is used for connecting to MEMS sensors, such as accelerometer or magnetometer.

	GPS GPIO n.4	GPS GPIO n.0	GPS GPIO n.1
With sensor	Float	3-4 pins shorted in PL302	5-6 pins shorted in PL302
Without sensor	13-14 pins shorted in PL302	Float	Float

Table 22

19.15. GPS power-on management

JF2 module power on/off can be controlled by an external host signal or it is possible to have the automatic module transition to the full power state by tying the SYSTEM-ON output to the ON-OFF input. The table below shows how to set these two options:

	Power Mode
10-12 and 19-21 pins shorted in PL302	Full power mode
11-12 pins shorted in PL302	ON/OFF controlled by an external host signal

Table 23

19.16. Antenna connectors

19.16.1. GSM antenna connector

A GSM antenna must be connected to SO105.



19.16.2. GPS antenna connector

A GPS antenna must be connected to SO201.



WARNING:

Don't connect a *GSM* antenna on the GPS antenna connector



20. GC864 Interface

This board allows easily interfacing the module with the EVK2 and testing its functionalities; any version of GC864 can be inserted.
No settings are needed.

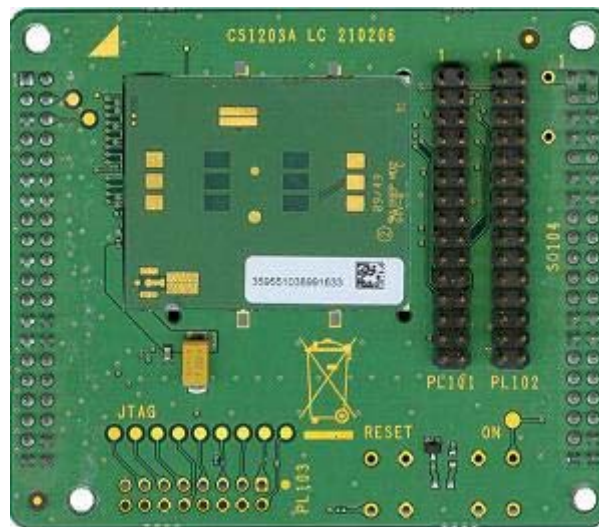


Figure 57. GC864 Interface Board

20.1. Stand-alone setup

If you need to use the interface out of EVK2 (*Stand-alone* setup) you have to mount also:

- the SIMCARD Holder;
- the RESET Button
- the ON Button;
- the STATUS LED and its load resistance.



20.2. Interface connectors

The following connectors are available:

2 male connectors (30 PTH pins each one: PL102, PL103), by which it is possible to connect external devices, user's application, Telit extension boards, measurements equipment or other tools

2 female connectors (40 PTH pins each one: SO101, SO102), to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines).

20.3. Content of the kit

Please check out the contents of your interface kit; if any of the items is missing, please contact your supplier.

Description	Quantity
GC864 INTERFACE	1
ASSEMBLED CABLE L-200 COAX 0.8 TERMINALS GSC & SMA F PANNEL	1

Table 24



21. GC864-C2 family Interface

This board allows easily interfacing the module with the EVK2 and testing its functionalities; any version of GC864-C2 can be inserted.
No settings are needed.



Figure 58. GC864-C2 Interface Board

21.1. Stand-alone setup

If you need to use the interface out of EVK2 (*Stand-alone* setup) you have to mount the following missing components:

- the SIMCARD Holder ;
- the ON Button ;
- the STATUS LED and its load resistance.



21.2. Interface connectors

The following connectors are available:

2 male connectors (30 PTH pins each one: PL101, PL102), by which it is possible to connect external devices, user's application, Telit extension boards, measurements equipment or other tools;

2 female connectors (40 PTH pins each one: SO101, SO104), to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines);

21.3. Content of the kit

Please check out the contents of your interface kit; if any of the items is missing, please contact your supplier.

Description	Quantity
GC864-C2 INTERFACE	1
ASSEMBLED CABLE L-250 RG174 TERMINALS SMA F & MMCX 90 M	1

Table 25



22. GE865 Interface

This board allows easily interfacing the GE865 modules with the EVK2 and testing their functionalities;
No settings are needed.



Figure 59. GE864 Interface Board

22.1. Stand-alone setup

If you need to use the interface out of EVK2 (*Stand-alone* setup) you have to mount the following missing components:

- the RESET Button
- the ON Button;
- the STATUS LED and its load resistance.



22.2. Interface connectors

The following connectors are available:

2 male connectors (30 *PTH pins each one: PL102, PL103*), by which it is possible to connect external devices, user's application, Telit extension boards, measurements equipment or other tools;

2 female connectors (40 *PTH pins each one: SO101, SO102*), to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines);

22.3. Content of the kit

Please check out the contents of your interface kit; if any of the items is missing, please contact your supplier.

Description	Quantity
GE865 INTERFACE	1

Table 26



23. GL865 Interface

This board allows easily interfacing the GL865 modules with the EVK2 and testing their functionalities;
No settings are needed.



Figure 60. GL865 Interface Board

23.1. Stand-alone setup

If you need to use the interface out of EVK2 (*Stand-alone* setup) you have to mount the following missing components:

- the RESET Button
- the ON Button;
- the STATUS LED and its load resistance.



23.2. Interface connectors

The following connectors are available:

2 male connectors (30 *PTH pins each one: PL102, PL103*), by which it is possible to connect external devices, user's application, Telit extension boards, measurements equipment or other tools;

2 female connectors (40 *PTH pins each one: SO101, SO102*), to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines);

23.3. Content of the kit

Please check out the contents of your interface kit; if any of the items is missing, please contact your supplier.

Description	Quantity
GL865 INTERFACE	1

Table 27



24. UC864 family Interface

This board allows easily interfacing the UC864/CC864 modules with the EVK2 and testing their functionalities;

No settings are needed.

For more information please refer to 1vv0300771 (UC864/CC864 Interface Board User Guide)



Figure 61. UC864 Interface Board

24.1. Stand-alone setup

If you need to use the interface out of EVK2 (*Stand-alone* setup) you have to mount the following missing components:

the RESET Button
the ON Button;



24.2. Interface connectors

The following connectors are available:

male connectors (30 *PTH pins each one: PL101, PL102*), by which it is possible to connect external devices, user's application, Telit extension boards, measurements equipment or other tools;

female connectors (40 PTH pins each one: CON102, CON103), to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines);
2 USB connectors (selectable by Jumper Setting)

For additional details on the connections and the possible Jumper settings please refer to the Interface board User guide (1vv0300771)

24.3. Content of the kit

Please check out the contents of your interface kit; if any of the items is missing, please contact your supplier.

Description	Quantity
UC864/CC864 INTERFACE	1

Table 28



25. HE910 family Interface

This board allows easily interfacing the HE910 modules with the EVK2 and testing their functionalities;
No settings are needed.

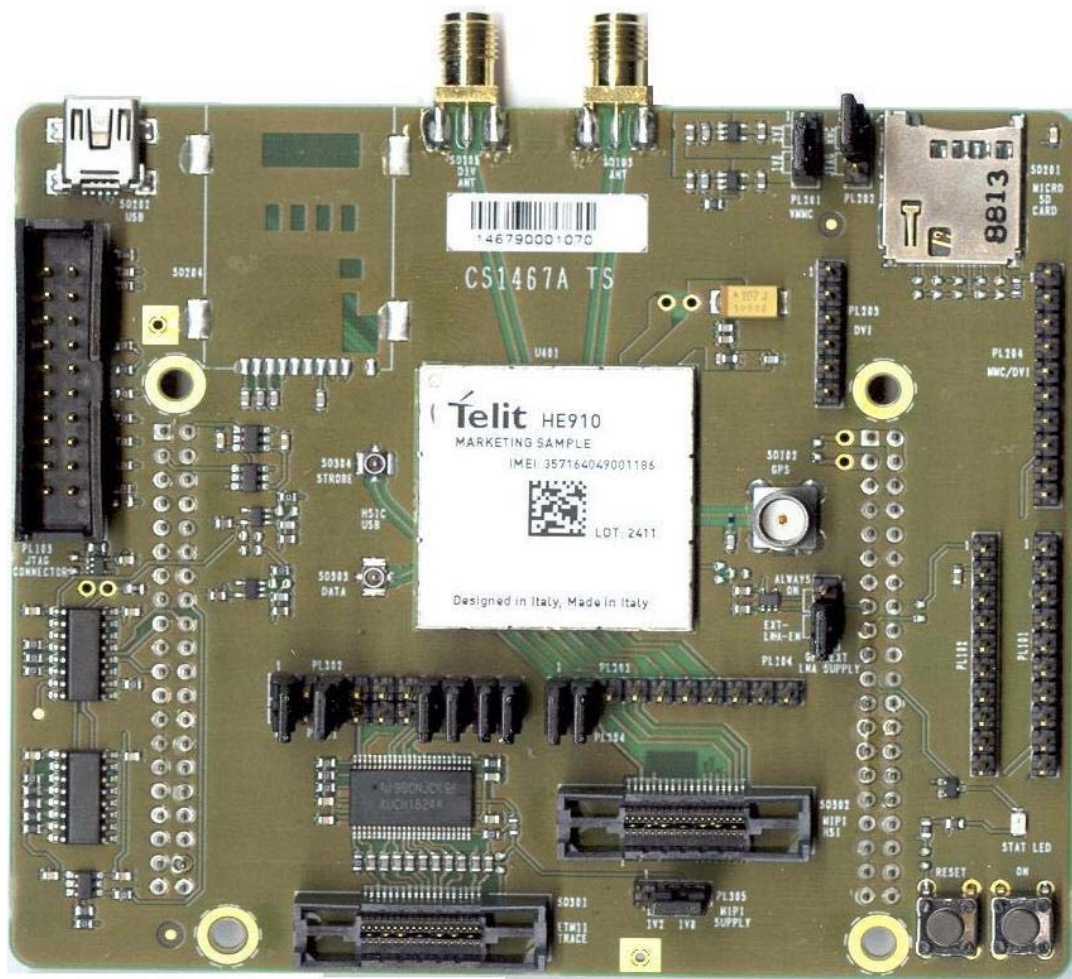


Figure
HE910

Interface Board

62.

25.1. Stand-alone setup

The Jumper setting and the assembled components are ready permitting the standalone use.



25.2. Interface connectors

The following connectors are available:

2 female connectors (40 PTH pins each one: SO101, SO104), to connect the interface to the EVK2 mother board circuits (power supply lines, serial in/out lines, audio in/out lines);


1 USB connector (SO202) related to the HE910 USB 2.0 port.

3 RF connectors for GSM/UMTS Antenna (SO103), Receiver Diversity Antenna (SO105) and GPS Antenna (SO102)

1 SIM Holder (SO204)

A group of Male connectors (PL301, PL302, PL303, PL304, PL102, PL203, PL204) that provide the additional signals (i.e. GPIOs) and could select the functions by Jumper setting (see the related document section/schematic for this).

The following picture is showing the connector's positions and the default settings for the Jumpers.

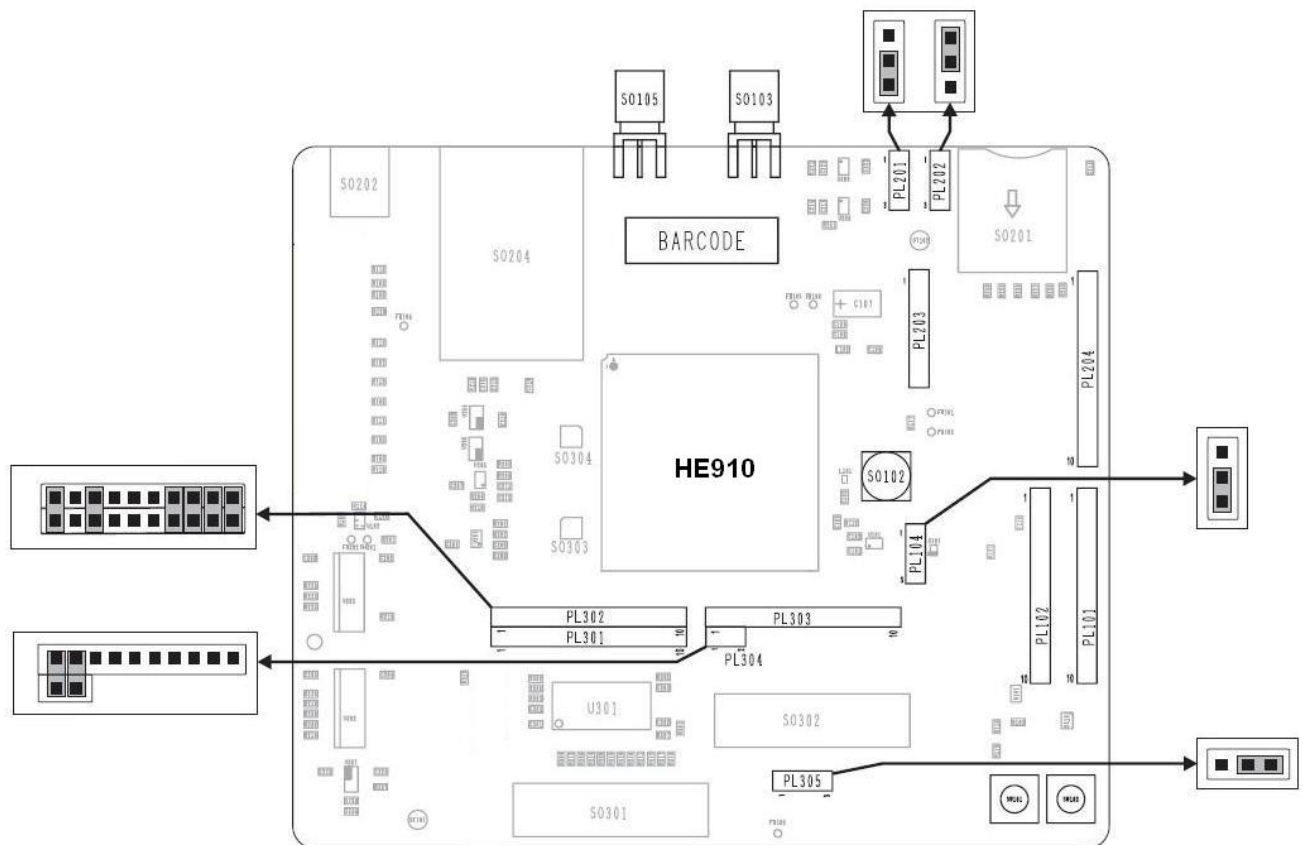

25.3. Antenna connectors

25.3.1. GSM/UMTS Antenna connector

A GSM/UMTS compatible antenna (Refer to the product's HW user guide) antenna must be connected to SO103.

25.3.2. Receiver Diversity Antenna connector


A GSM/UMTS compatible antenna (Refer to the product's HW user guide) antenna could be connected to SO105.

25.3.3. GPS antenna connector


A GPS antenna could be connected to SO102. Please refer to the product's HW user guide for the proper type.

The GPS Antenna (if an active type) could be supplied with a dedicated LDO (3V DC) that could be set in the following way using the Jumpers on PL104.

LDO Enabled by the HE910 Module.

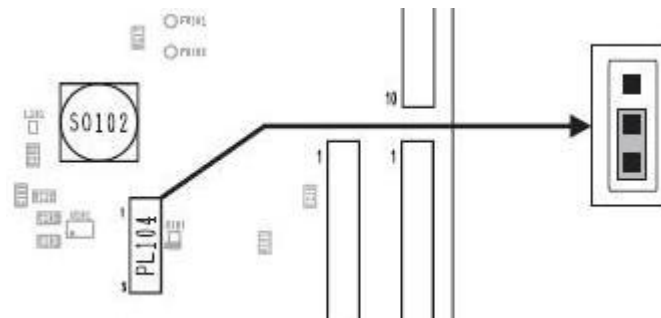

LDO Always Enabled

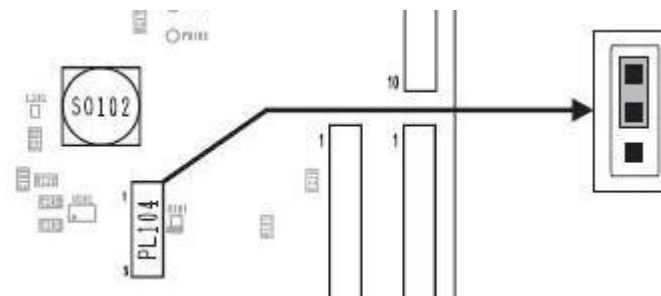

WARNING:



Don't connect a *GSM/UMTS* antenna on this connector



25.4. Expansion Connectors

25.4.1. PL301/PL302

The connectors are carrying the following signals:

PL301		
Pin#	Pin Name	Description
1	STAT_LED	Status Led
2	NC	
3	RESERVED	
4	NC	
5	NC	
6	NC	
7	C125/RING	
8	C107/DSR	
9	C109/DCD	
10	RESERVED	

PL302		
Pin#	Pin Name	Description
1	GPIO_01	Default function is Status Led
2	GPIO_02	
3	GPIO_03	
4	GPIO_04	
5	GPIO_06	
6	GPIO_07	
7	C125/RING	Jumper to EVK2
8	C107/DSR	Jumper to EVK2
9	C109/DCD	Jumper to EVK2
10	RESERVED	Jumper to EVK2

25.4.2. PL303/PL304/PL305

The connectors are carrying the following signals:



PL303		
Pin#	Pin Name	Description
1	TX_AUX	Auxiliary serial port (TX)
2	RX_AUX	Auxiliary serial port (RX)
3	SPI_CLK	SPI
4	SPI_MRDY	SPI
5	SPI_SRDY	SPI
6	GPIO_08	
7	GPIO_09	
8	GPIO_10	
9	RESERVED	
10	NC	

PL304		
Pin#	Pin Name	Description
1	TX_AUX	Jumper to EVK2
2	RX_AUX	Jumper to EVK2

The PL305 connector permits to select the supply domain for the signals present on PL303

PL305		
Pin#	Pin Name	Description
1	VIO_1V2	VIO supply at 1.2V
2	VDD_IO	Input pin for the bus supply
3	VIO_1V8	VIO supply at 1.8V

The default setting is VIO set to 1.8V DC.



25.4.3. PL102

The connector is providing the following signals:

PL102		
Pin#	Pin Name	Description
1	VAUX/PWRMON	Auxiliary supply / Power On Indicator
2	VRTC	RTC Backup
3	RESERVED	
4	RESERVED	
5	RESERVED	
6	GPIO_05	GPIO
7	RESERVED	
8	RESERVED	
9	RESERVED	
10	GND	

25.4.4. ON_OFF & RESET BUTTONS

The 2 Buttons present on the Interface should be used to control the Power ON and RESET lines of the module.

The 2 Buttons on the EVK2 could not be used with the HE910 Interface.

25.5. Content of the kit

Please check out the contents of your interface kit; if any of the items is missing, please contact your supplier.

Description	Quantity
HE910 INTERFACE	1

Table 29



26. GPIO ports

A certain number of GPIO ports (General Purpose Input/Output) are available on every Telit Module Interface Board, giving you the possibility to drive digital devices and report their own status.

Some of these ports are dedicated. *Refer to Telit Product Description and Telit Hardware User Guide* to have all information about characteristics of every GPIO port.

You can consult the following paragraphs to see the displacement of GPIO on every Interface Board.



Telit EVK2 User Guide

1vv0300704 Rev.13- 2012/06/25



If you use this interface in conjunction with GM862-GPS version ***be careful*** that the following two pins of SO101 connector assume different functions, and precisely:

Pin 2 = TX_GPS

Pin 3 = RX_GPS



(Refer to schematic diagram 30276SE11151A)



Note on p/n 3990250684 and p/n 3990250685 GE863

(Refer to schematic diagrams *30276SE11151A-C*, *30276SE11151A-D*)

If you use these interfaces the following two pins of PL104 connector assume different functions, and precisely:

Pin 20 = ADC_IN2

Pin 21 = ADC_IN3

Pin 26 = N.C



26.1.3. GE863 Interfaces (p/n 3990250684 -3990250685-3990250703)

Refer to schematic diagrams 3\0276SE11151A-C; 30276SE11151A-D; 30276SE11151A-G


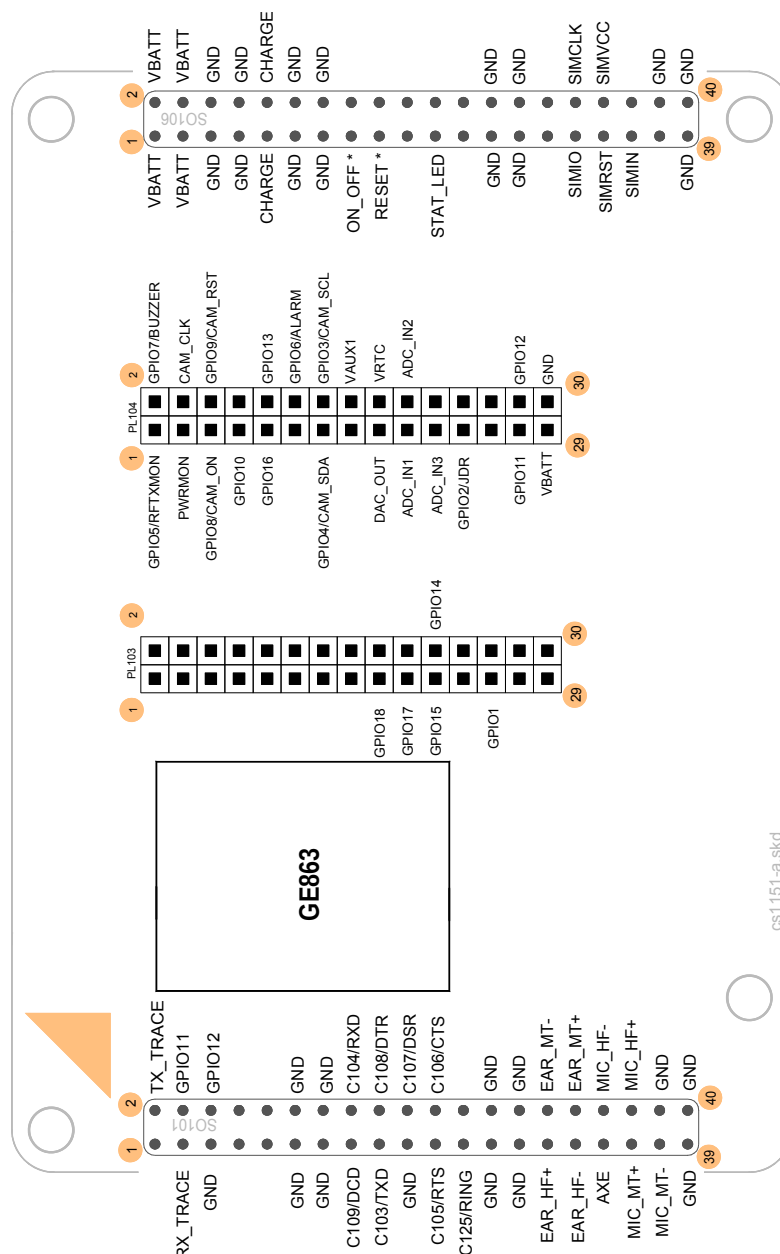



Figure 65: Position of GPIO ports on GE863 interfaces

26.1.4. GE864 Interface (p/n 3990250672)



(Refer to schematic diagram 30276SE1152B)



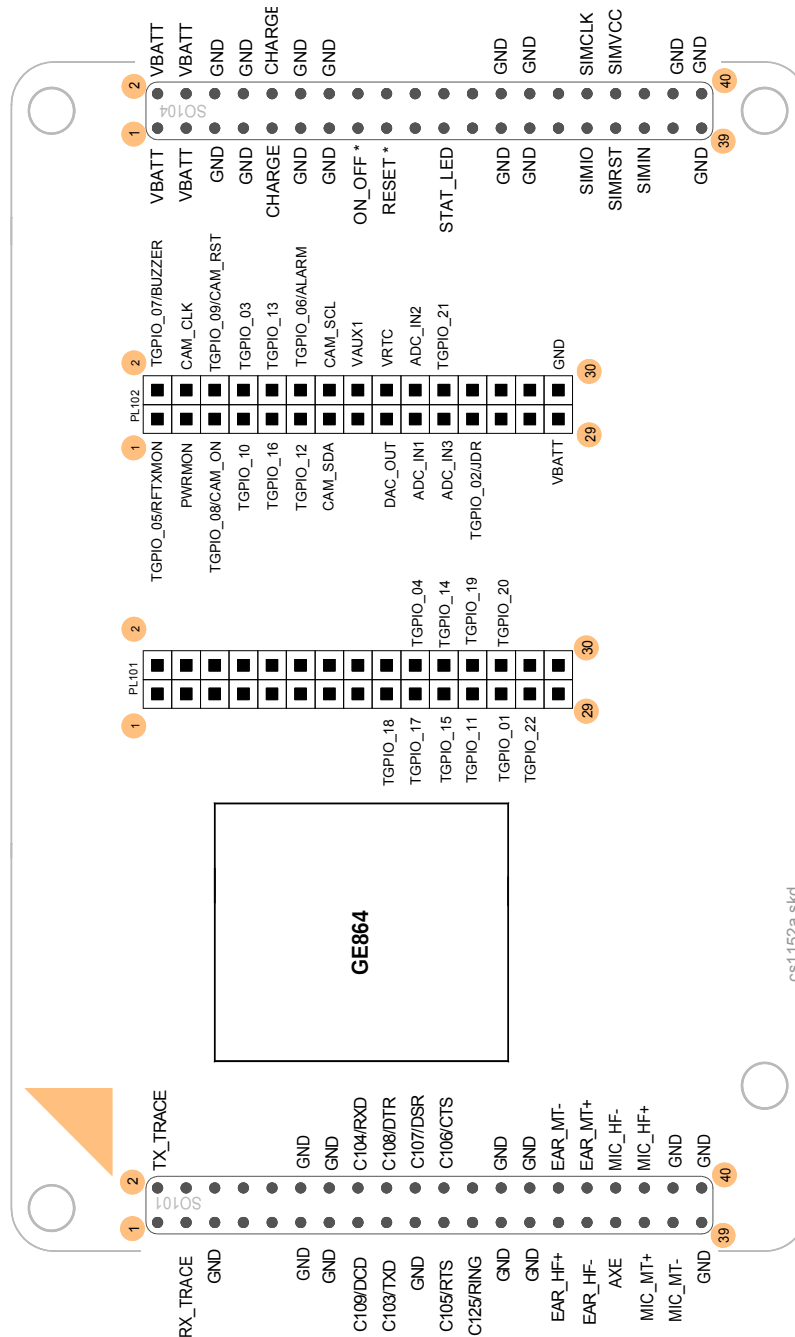




(Refer to schematic diagram 30311SE11433)



(Refer to schematic diagram 30276SE111203B)



26.1.8. GC864-C2 Interface (p/n 3990250683)

(Refer to schematic diagram 30276SE11231X)

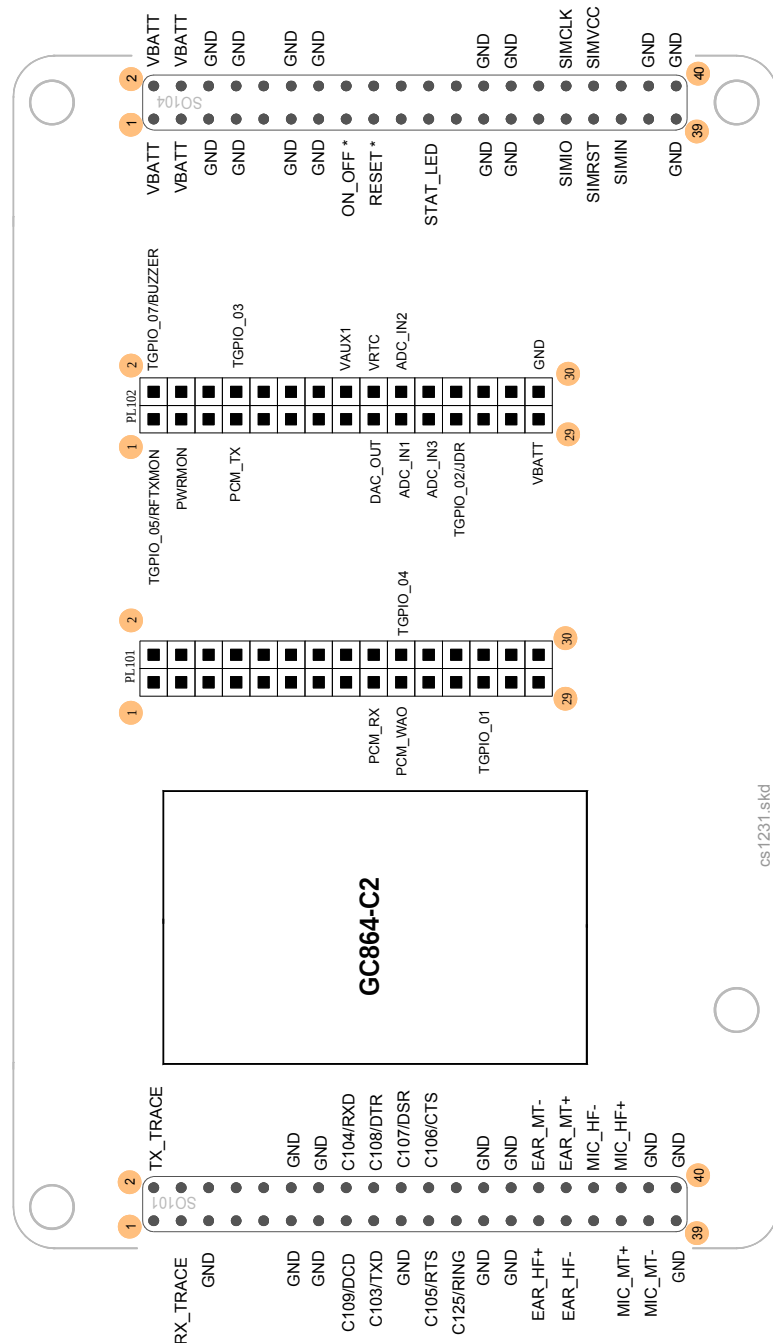


Figure 70. Position of GPIO ports on GC864-C2 interface

The top view of the UC864 board shows a central square area labeled UC864, CC864, and GC864. To the left of the center is a vertical connector J103 with a label CALL HF. Below it is a SUB MAIN label and a HF SELECT label. To the right of the center are two vertical connectors, PL101 and PL102, each with pins 1, 2, 29, and 30. Below these are connectors CON114 and CON115. To the right of the center is a vertical connector J105 with a label ON/OFF SW2, RESET SW1, and USB_B. Below it is a USB_A label and a J101 label. The board also features several status LEDs (STAT LED) and various other connectors (J106, J107, J108, J102). A large rectangular area is marked with a diagonal line, indicating a non-functional or reserved section.

PL101				PL102			
N.C	1	2	N.C	TGPIO_05/ RTXMON	1	2	TGPIO_07/ BUZZER
N.C	3	4	N.C	PWRMON	3	4	RESERVED
N.C	5	6	N.C	TGPIO_08	5	6	TGPIO_09
N.C	7	8	N.C	TGPIO_10/ PCM_TX	7	8	TGPIO_03
N.C	9	10	N.C	TGPIO_16	9	10	TGPIO_13
N.C	11	12	N.C	TGPIO_12	11	12	TGPIO_06/ ALARM
N.C	13	14	N.C	PCM_CLOCK	13	14	USB_ID
N.C	15	16	N.C	N.C.	15	16	VAUX1
TGPIO_18/ PCM_RX	17	18	N.C	DAC_OUT	17	18	VRTC
TGPIO_17/ PCM_SYNC	19	20	TGPIO_04	ADC_IN1	19	20	ADC_IN2
TGPIO_15	21	22	TGPIO_14	ADC_IN3	21	22	TGPIO_21
TGPIO_11	23	24	TGPIO_19	TGPIO_02/JDR	23	24	N.C
TGPIO_01	25	26	TGPIO_20	N.C	25	26	N.C
TGPIO_22	27	28	N.C	RESERVED	27	28	RESERVED
N.C	29	30	N.C	VBATT	29	30	GND

26.1.10. HE910 Interface

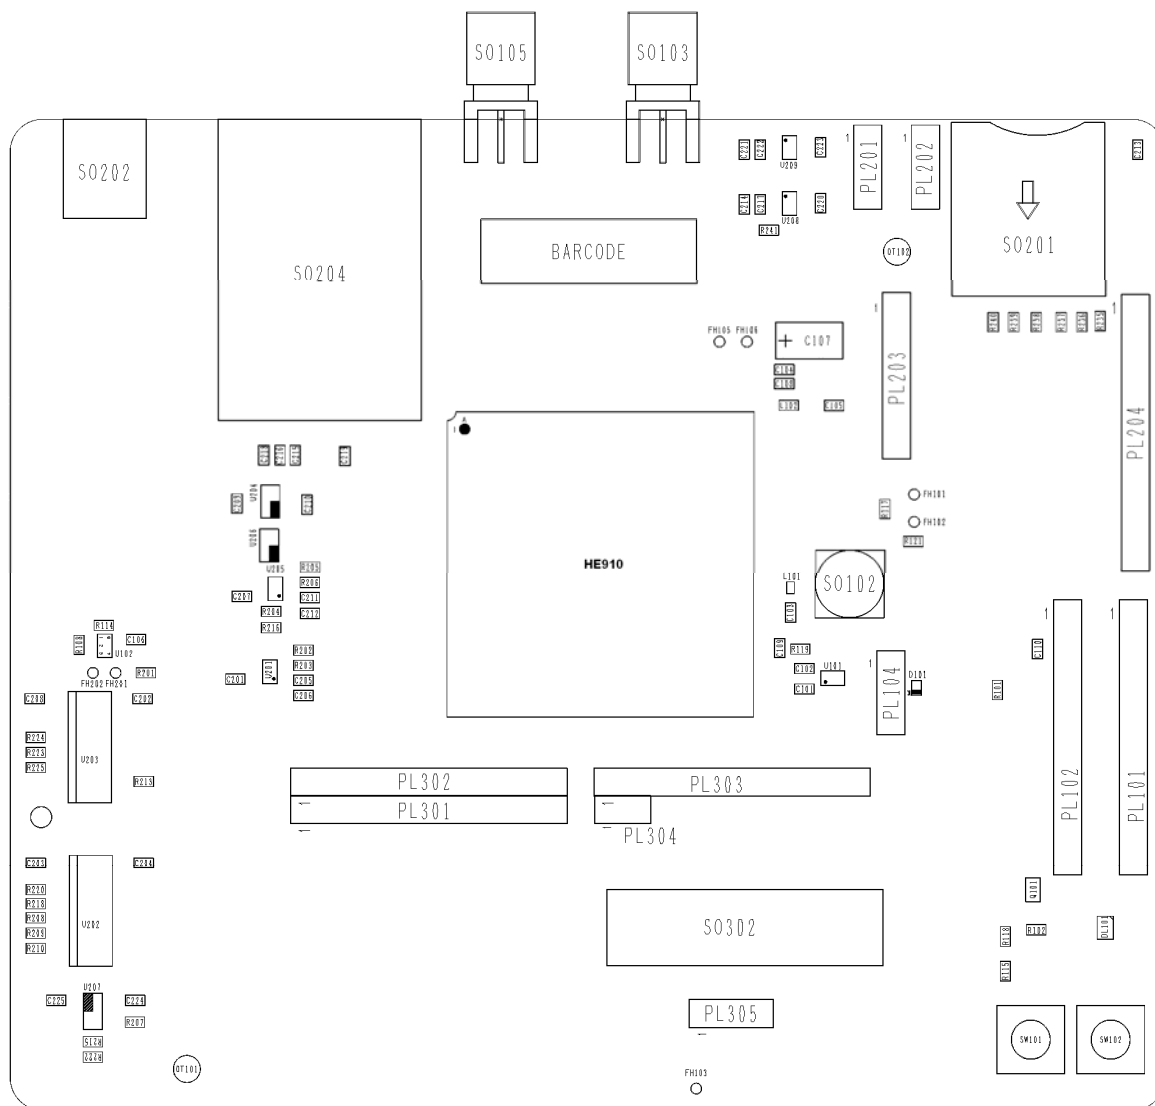


Figure 72. Position of GPIO on connectors of HE910 interface



The connectors are carrying the following signals:

Pin Name	Pin/Connector
GPIO_01	Pin 1 (PL302)
GPIO_02	Pin 2 (PL302)
GPIO_03	Pin 3 (PL302)
GPIO_04	Pin 4 (PL302)
GPIO_05	Pin 6 (PL102)
GPIO_06	Pin 5 (PL302)
GPIO_07	Pin 6 (PL302)
GPIO_08	Pin 6 (PL303)
GPIO_09	Pin 7 (PL303)
GPIO_10	Pin 8 (PL303)

Note on GPIO_08, 09, 10:

The supply domain of those pins needs to be selected with the jumper on PL305

PL305		
Pin#	Pin Name	Description
1	VIO_1V2	VIO supply at 1.2V
2	VDD_IO	Input pin for the bus supply
3	VIO_1V8	VIO supply at 1.8V

The default setting is VIO set to 1.8V DC.




27. SCHEMATICS

In the following paragraphs the user can find the schematics related to all EVK2 boards, therefore to the Mother Board, to the Interface Boards and to the Extension Boards.




27.1. EVK2 Mother Board

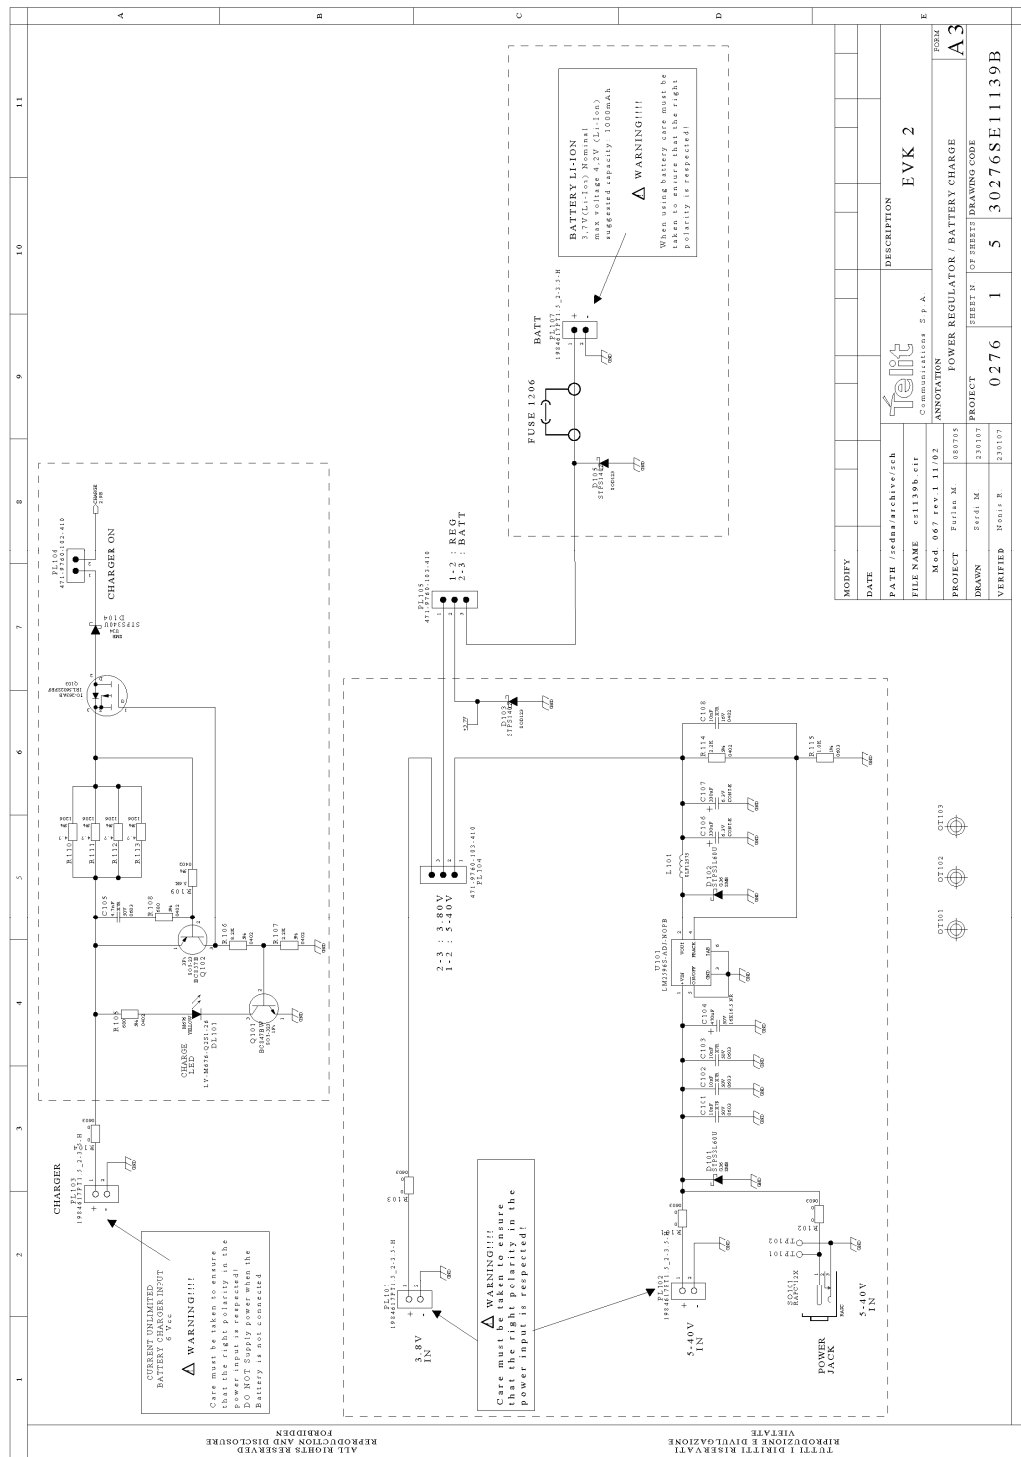





Telit EVK2 User Guide
1vv0300704 Rev.13- 2012/06/25

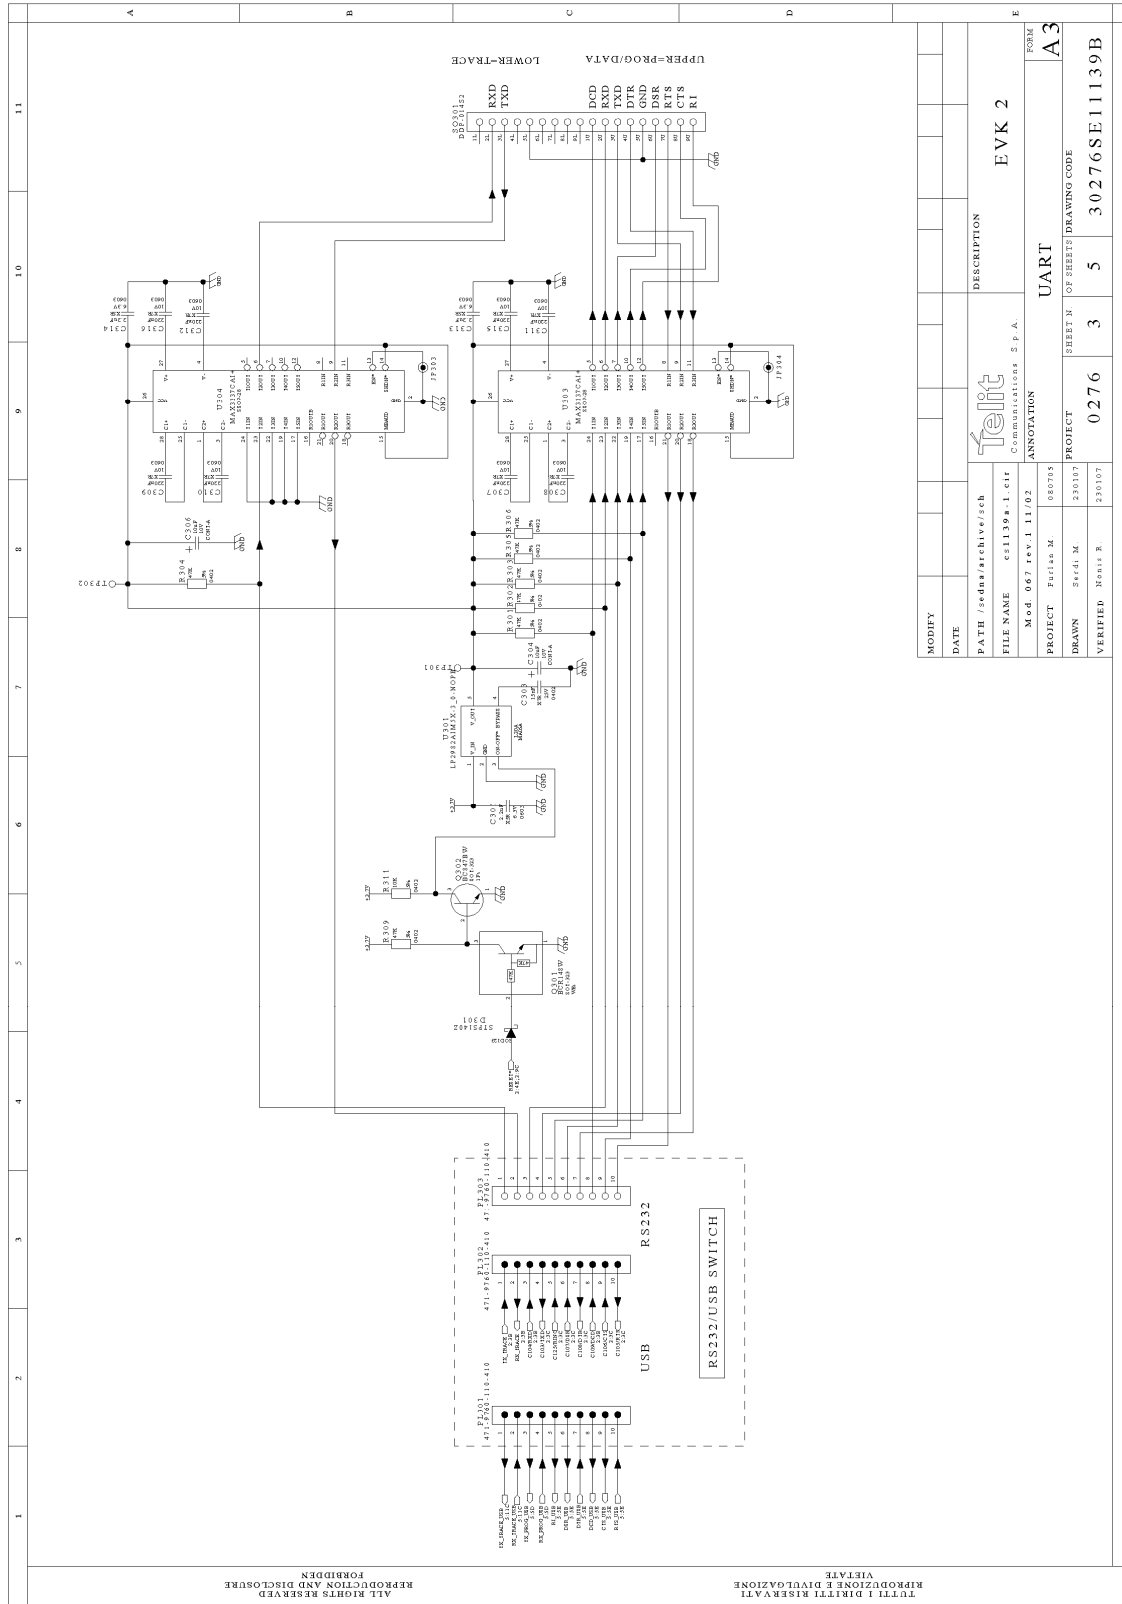


Telit EVK2 User Guide
1vv0300704 Rev.13- 2012/06/25

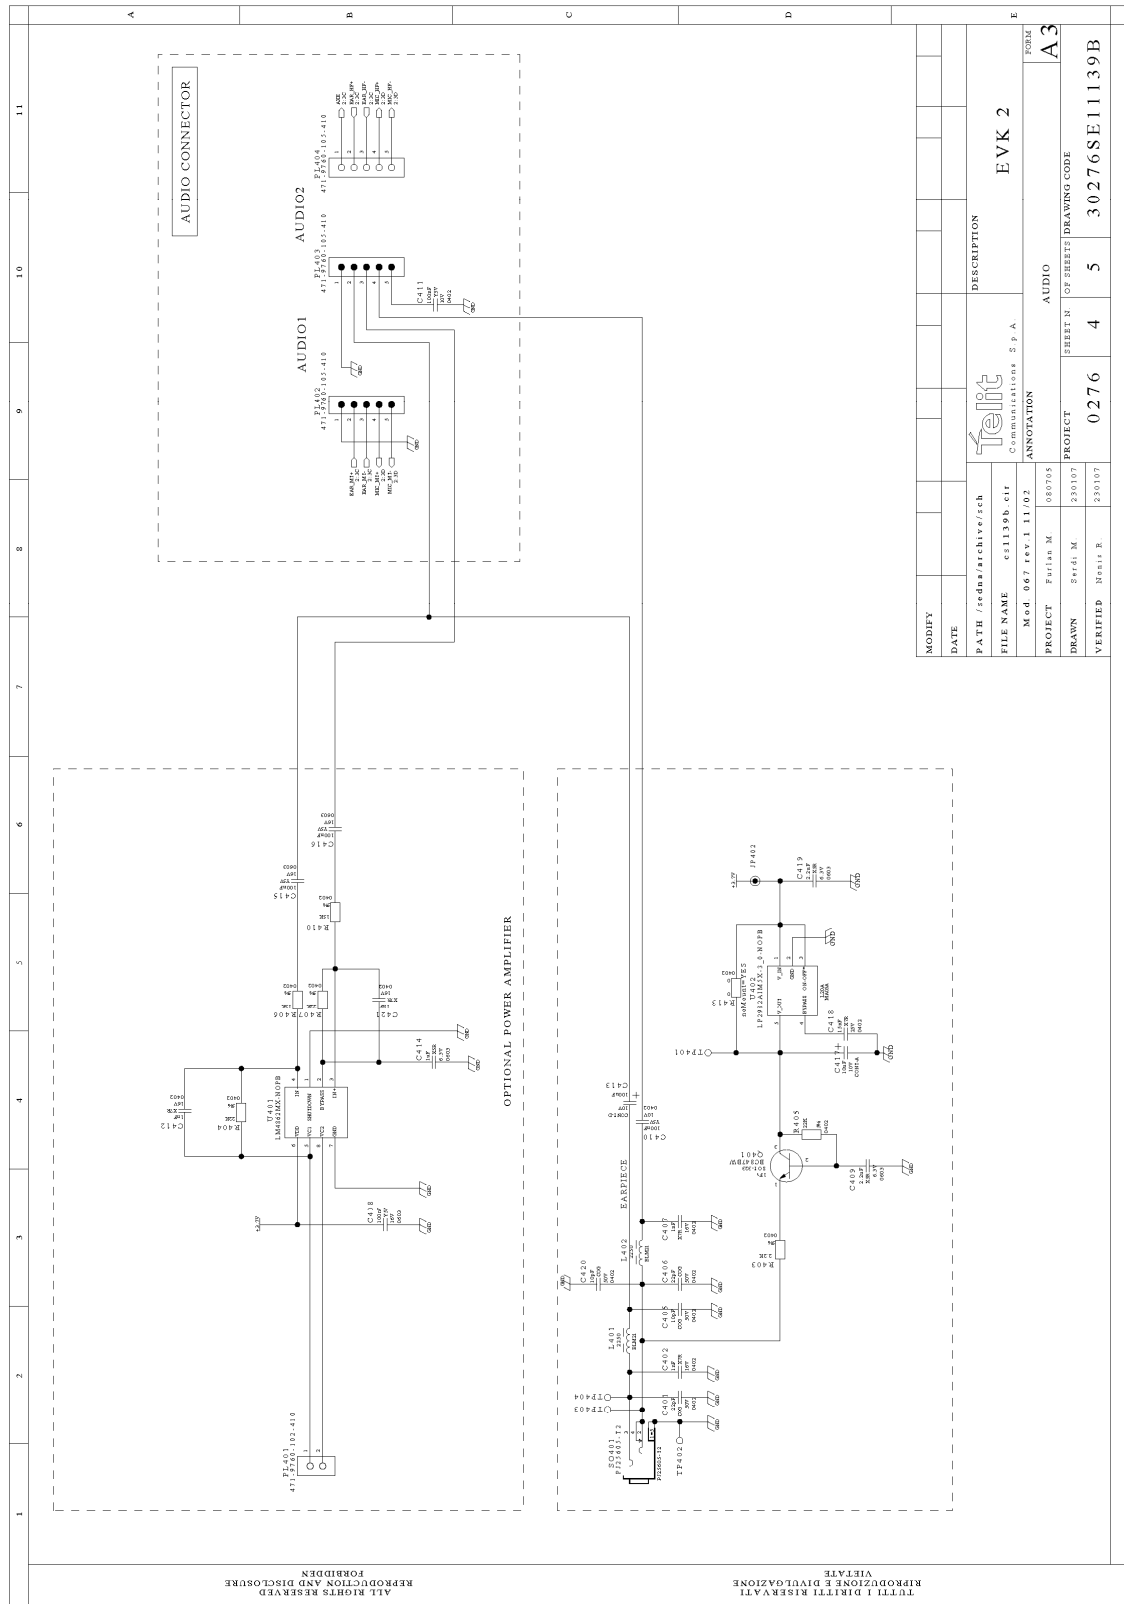


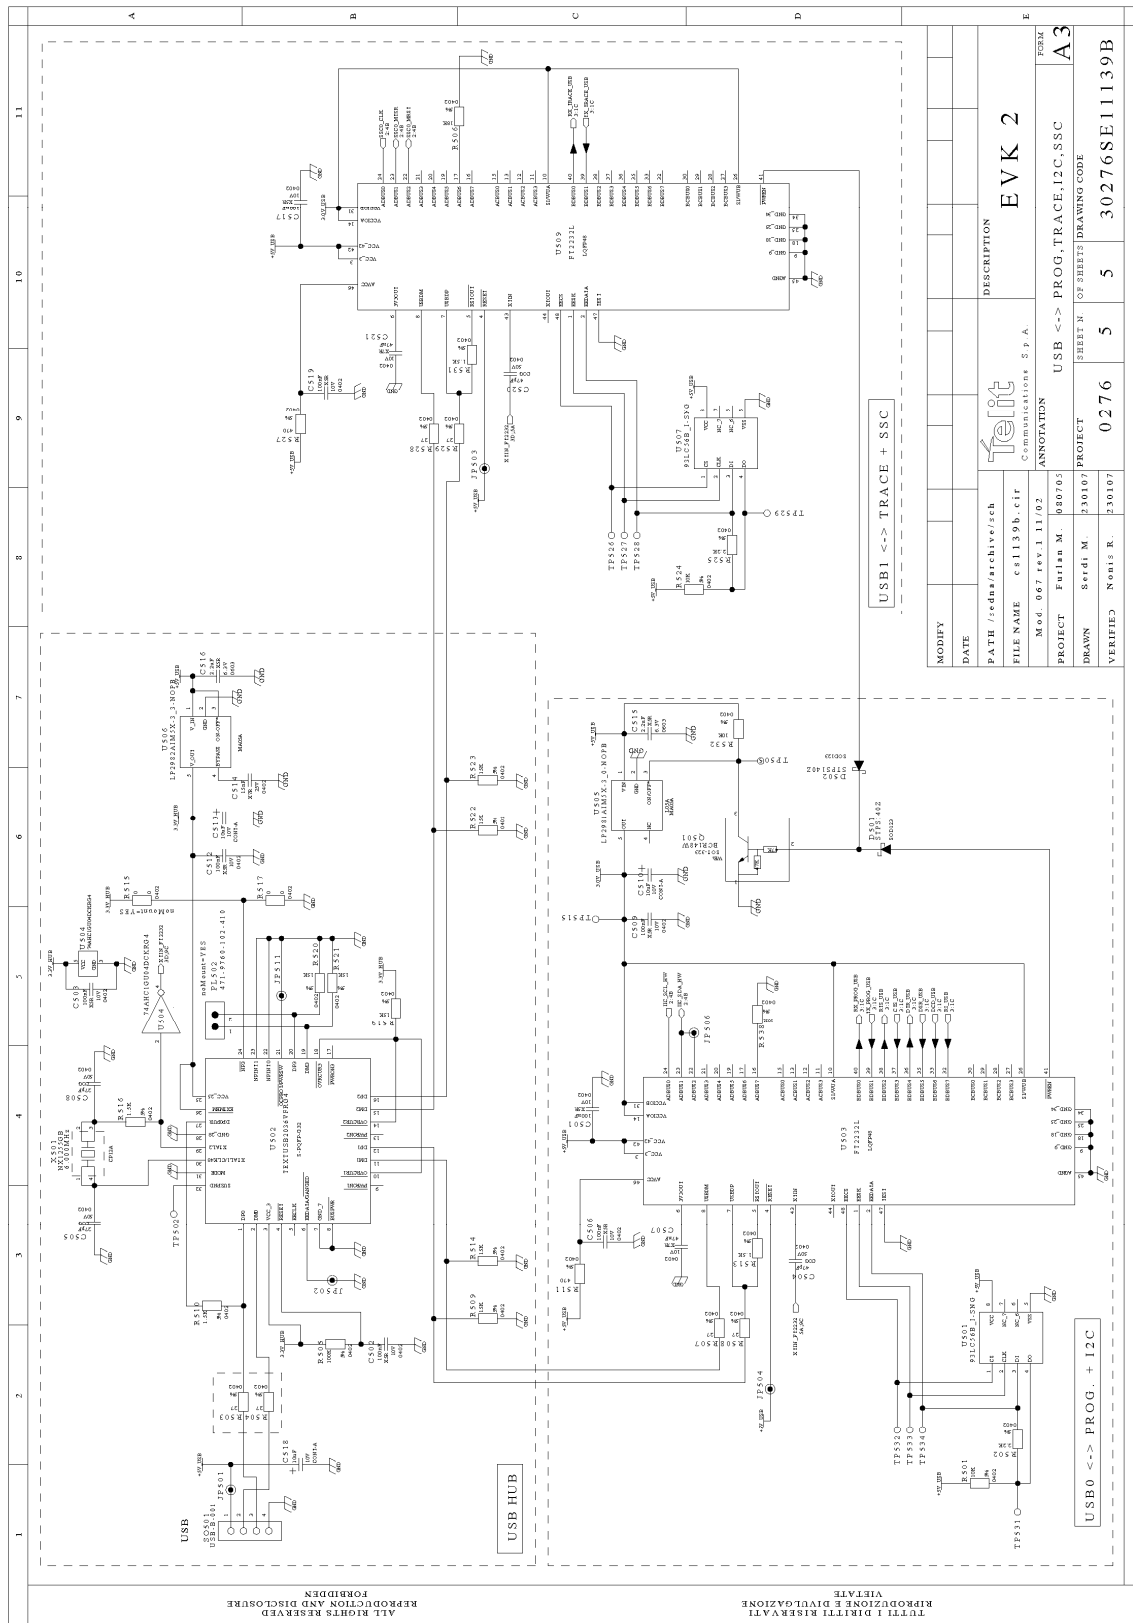


27.2. GM862 Interface Board

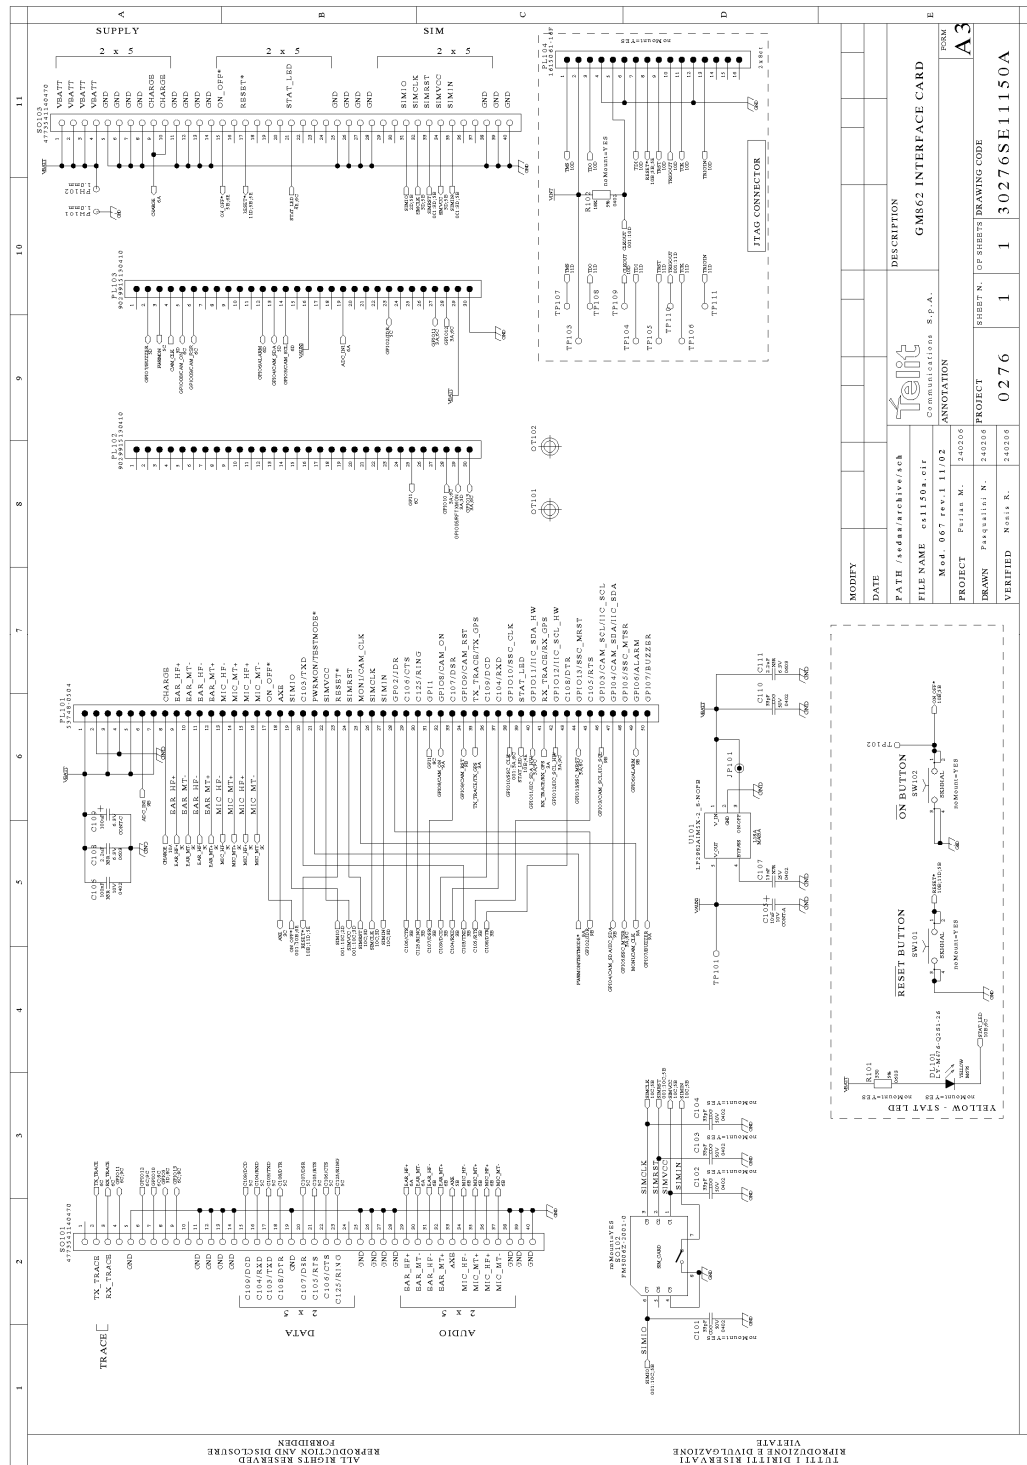

27.3. GE863 Interface Board

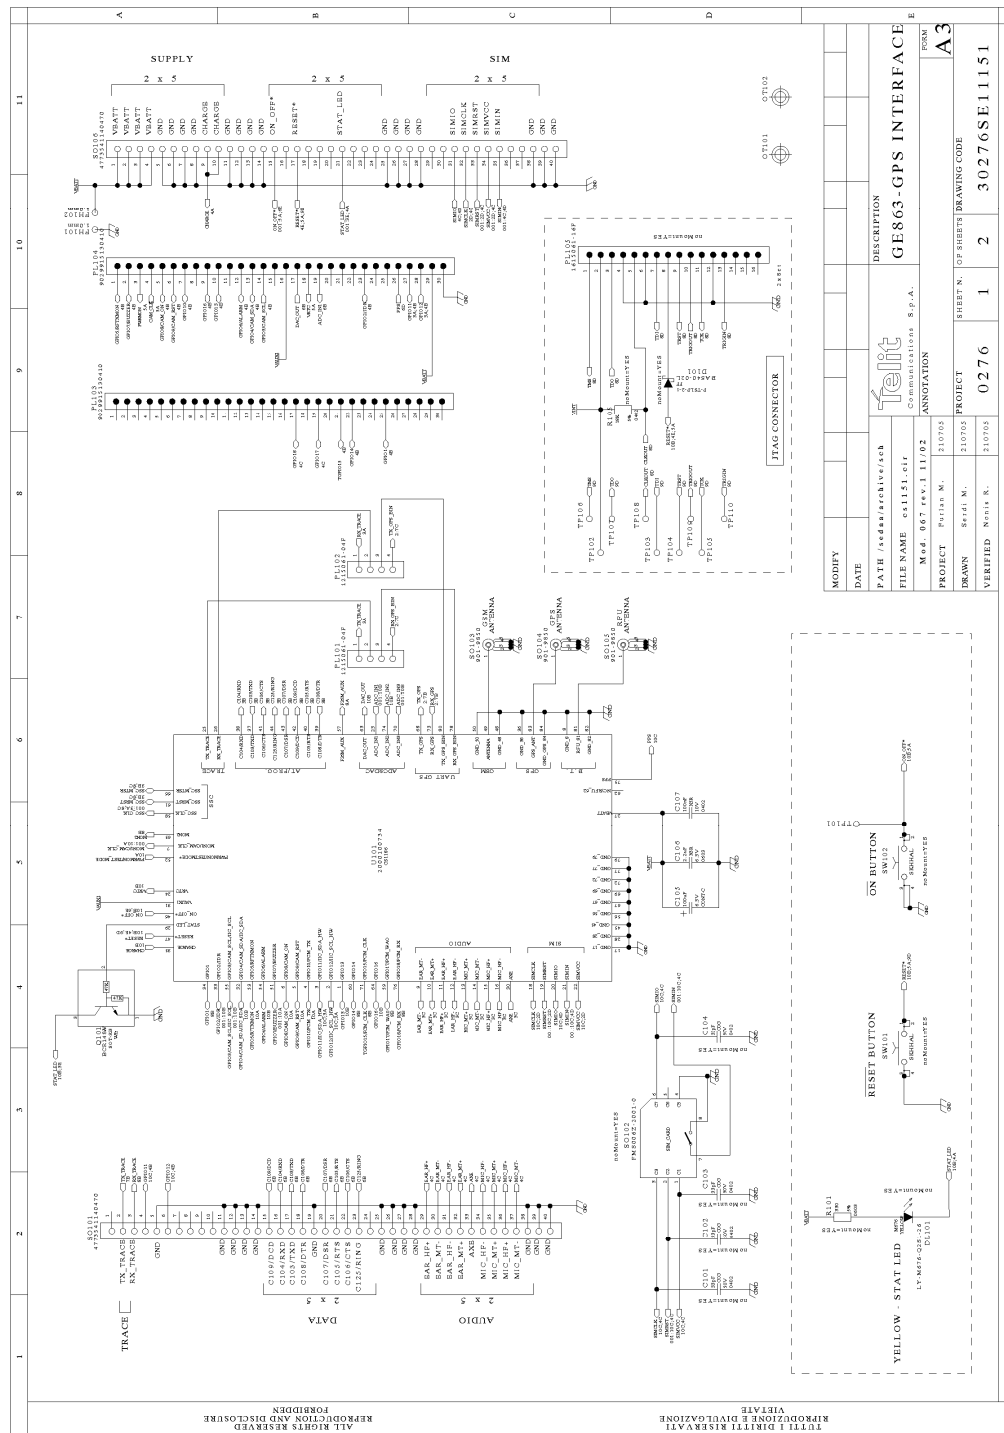


Telit EVK2 User Guide
1vv0300704 Rev.13- 2012/06/25

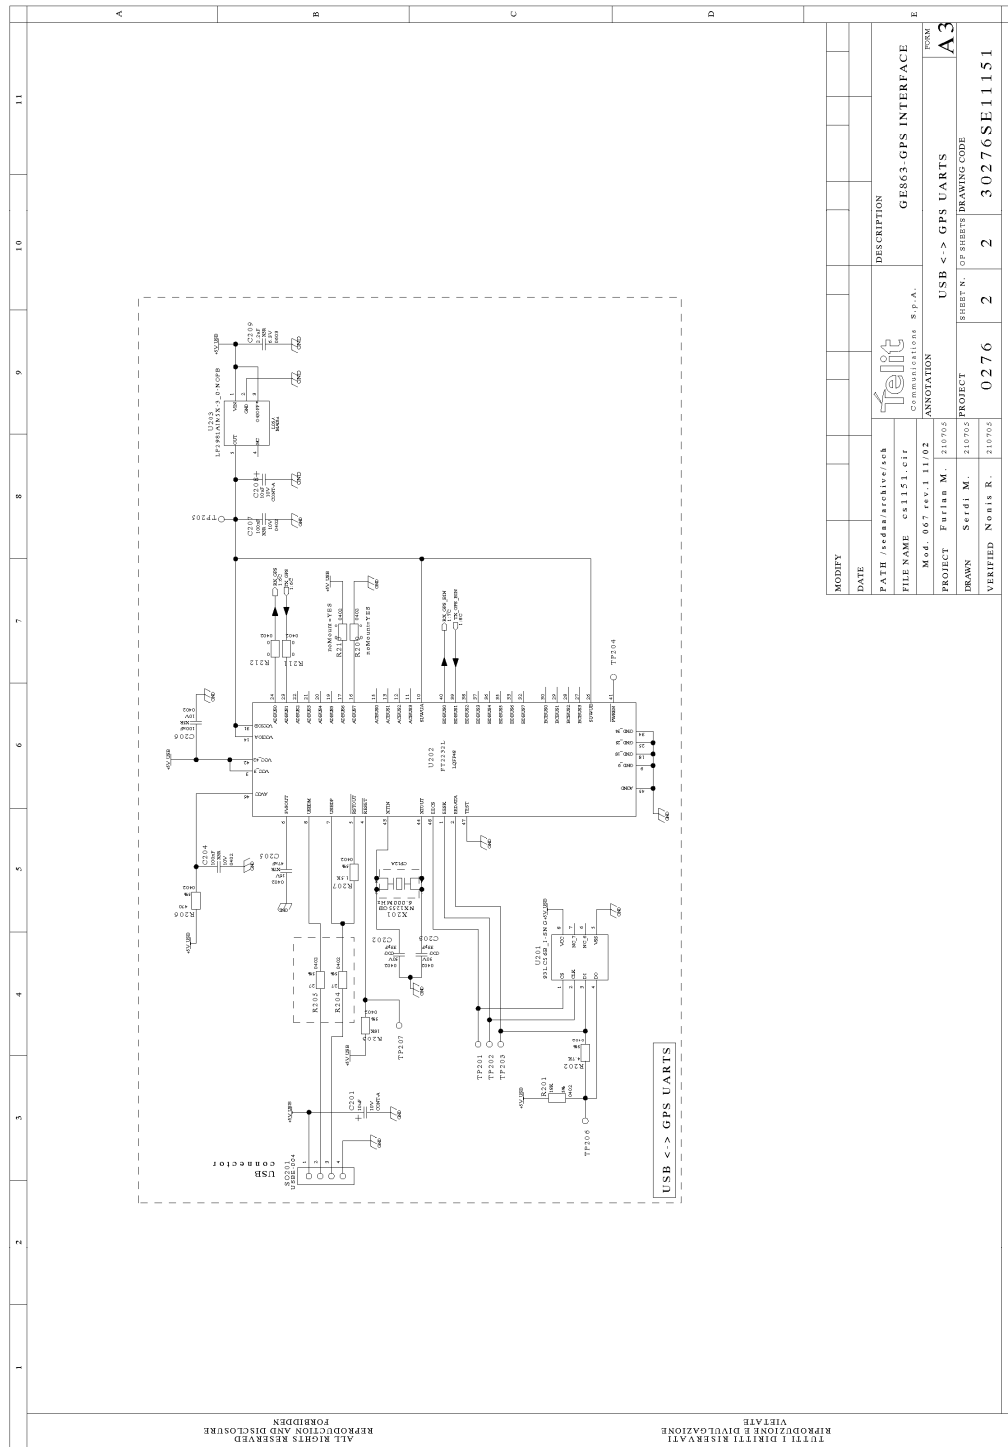

NOTE: This sheet is related only to GPS version.




27.4. GE864 Interface board

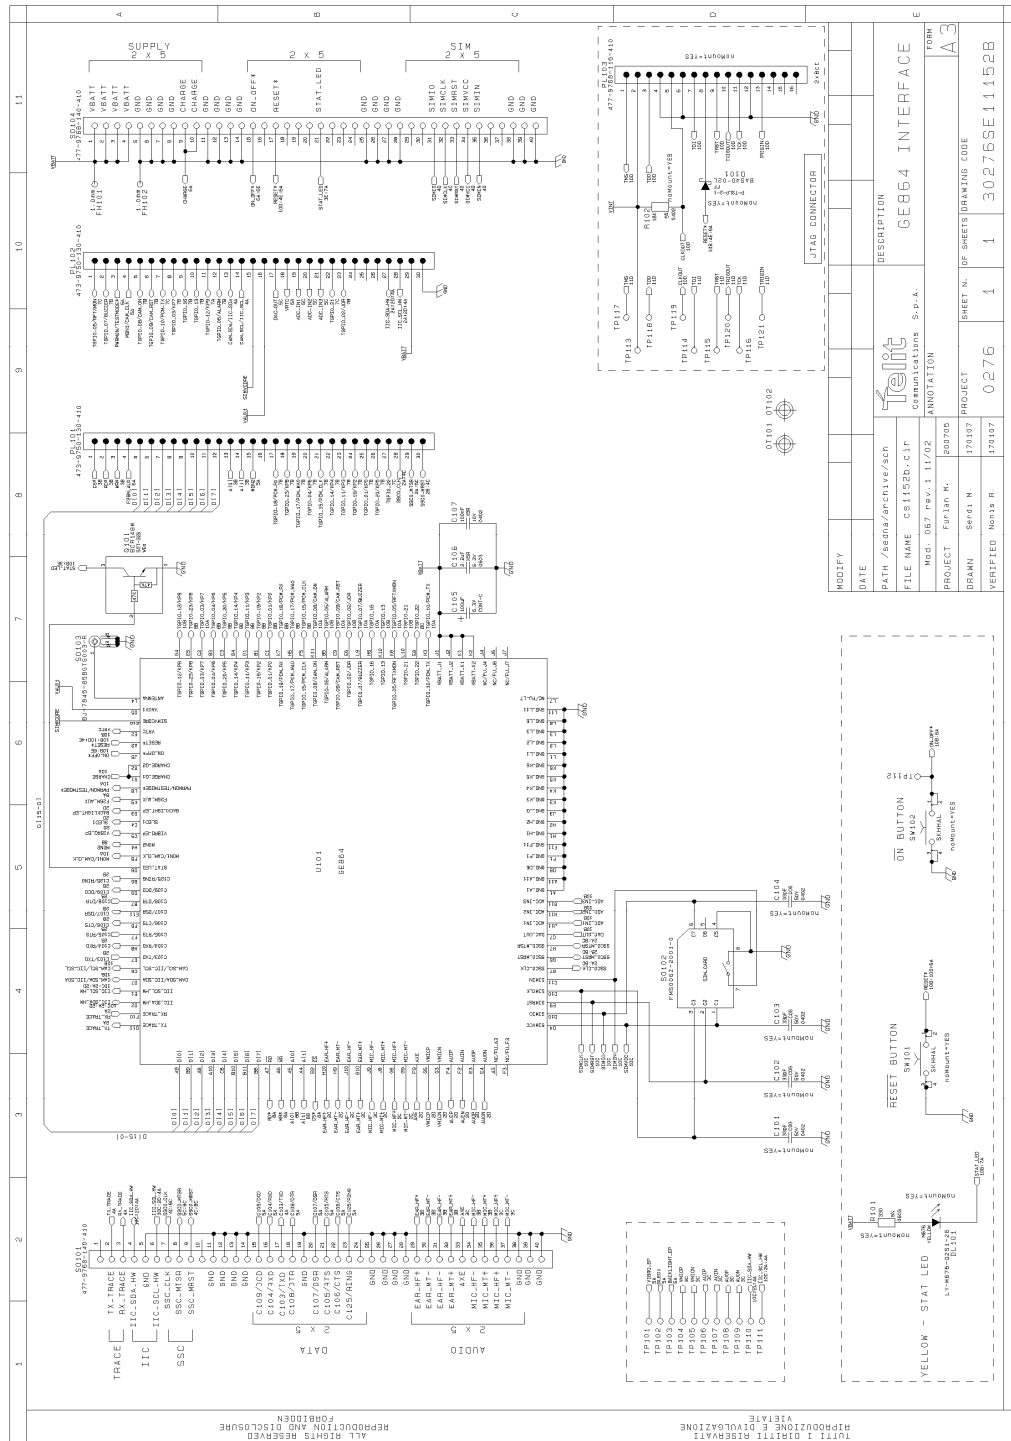





27.6. GE864 Interface board – V2

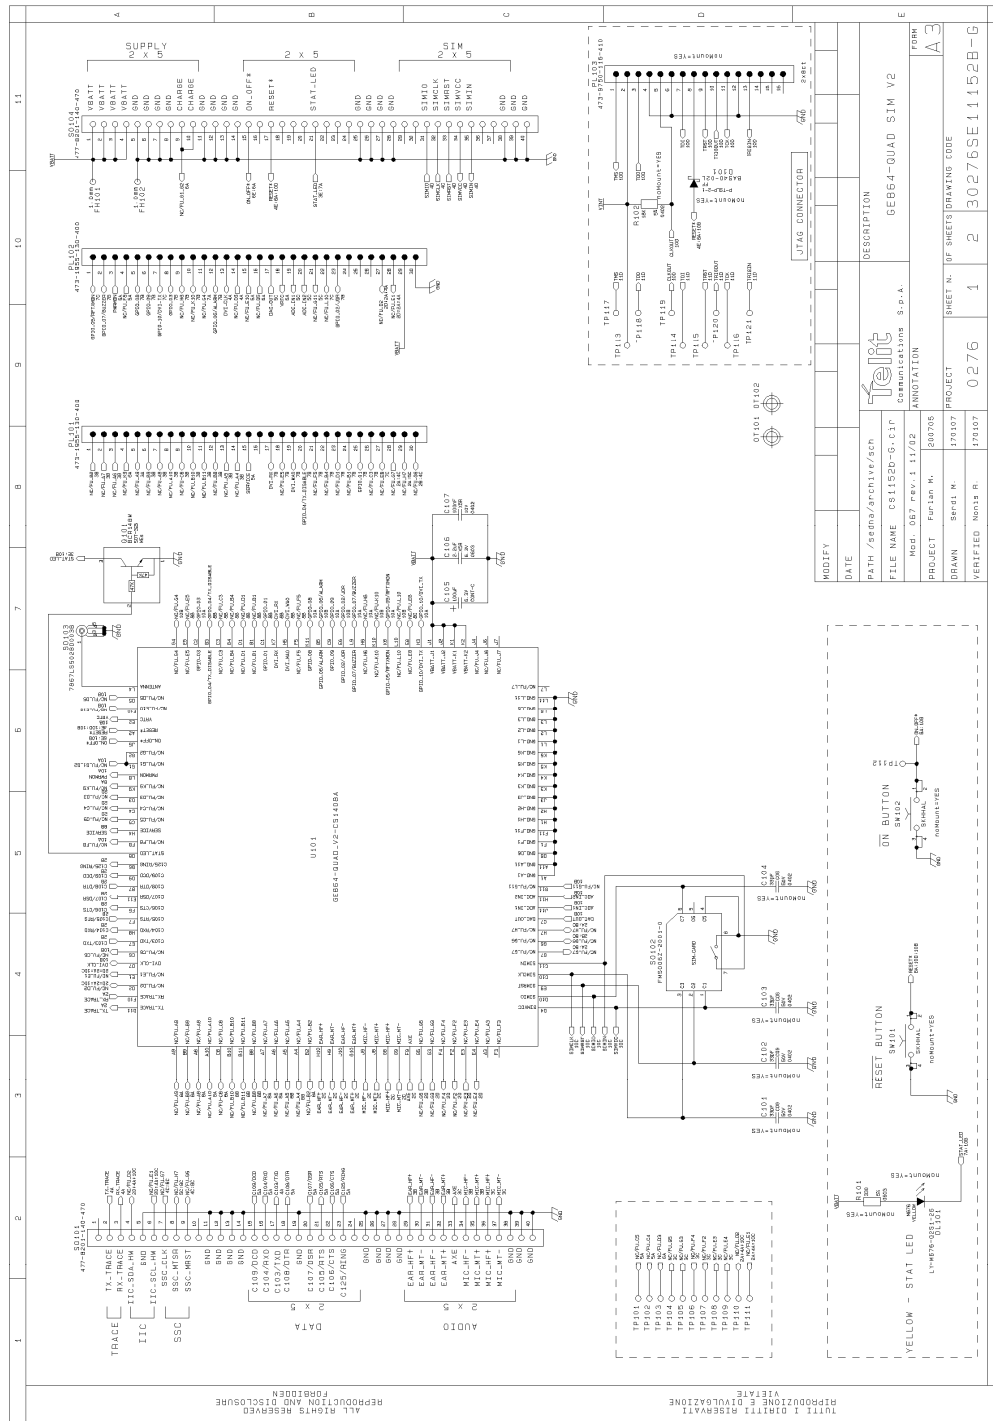


27.7. GE864-GPS Interface board

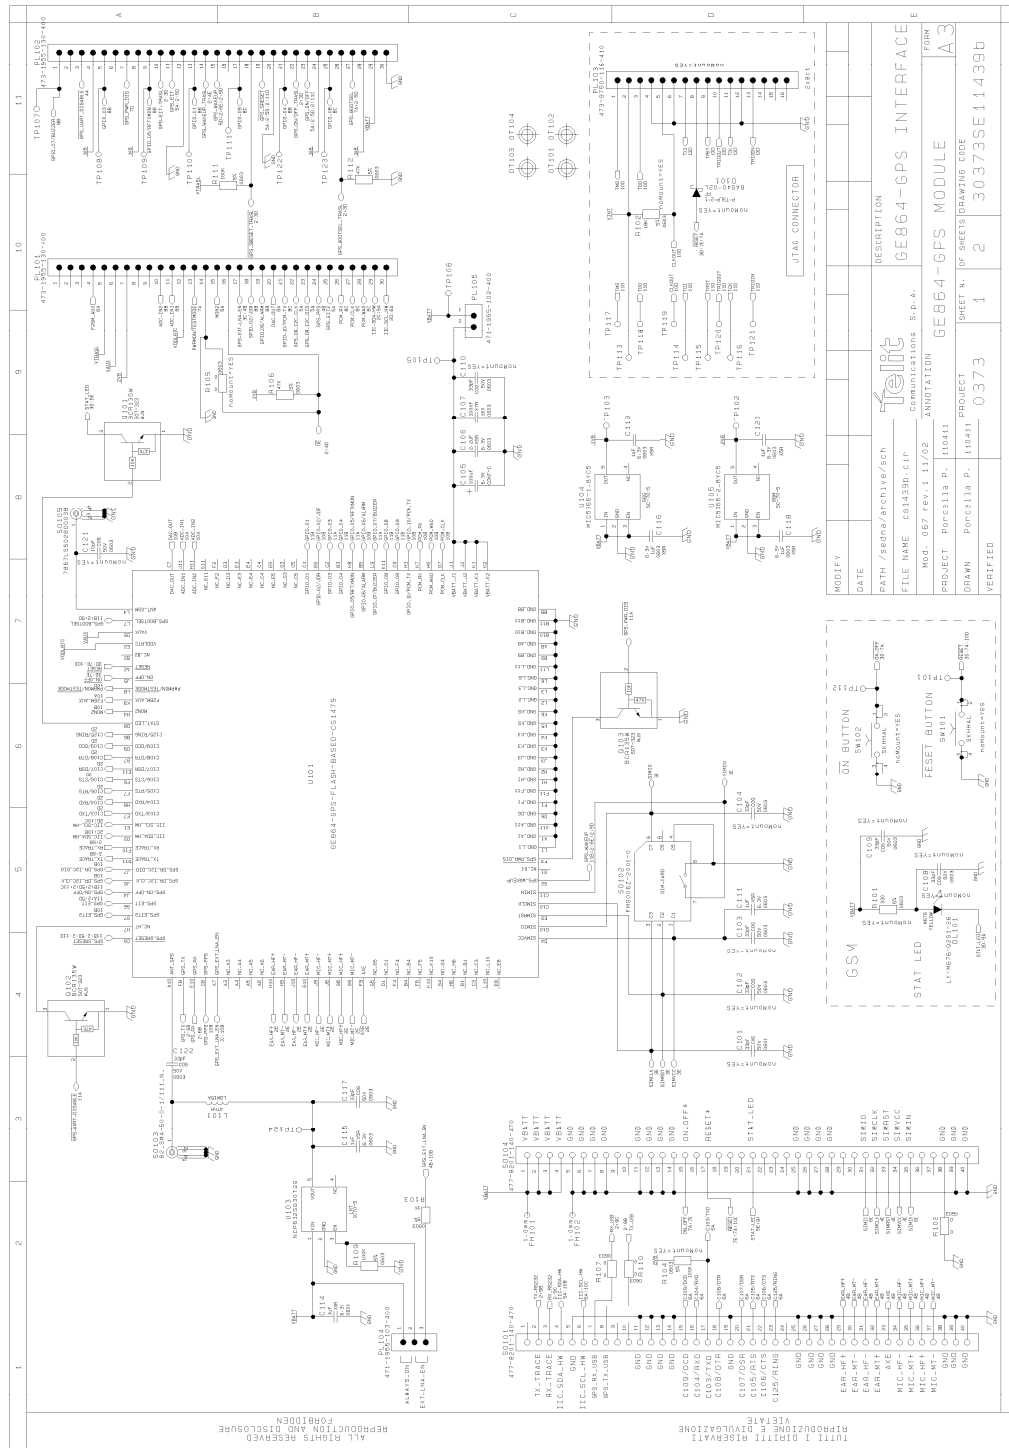


Telit EVK2 User Guide
1vv0300704 Rev.13- 2012/06/25

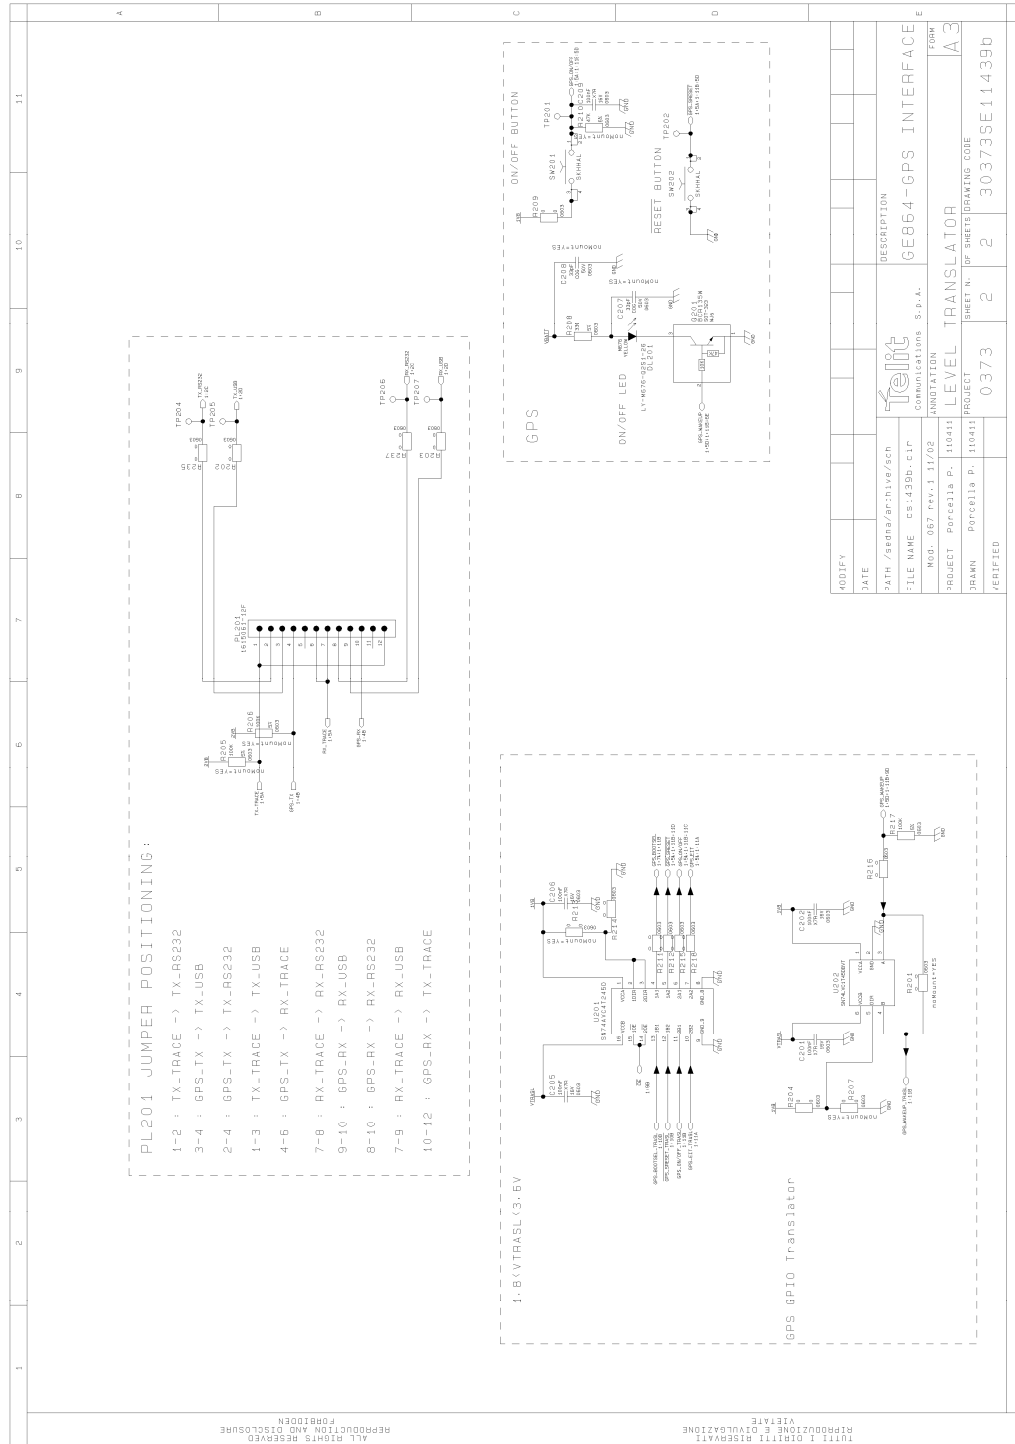


27.8. GE865/SE867-AGPS Interface board

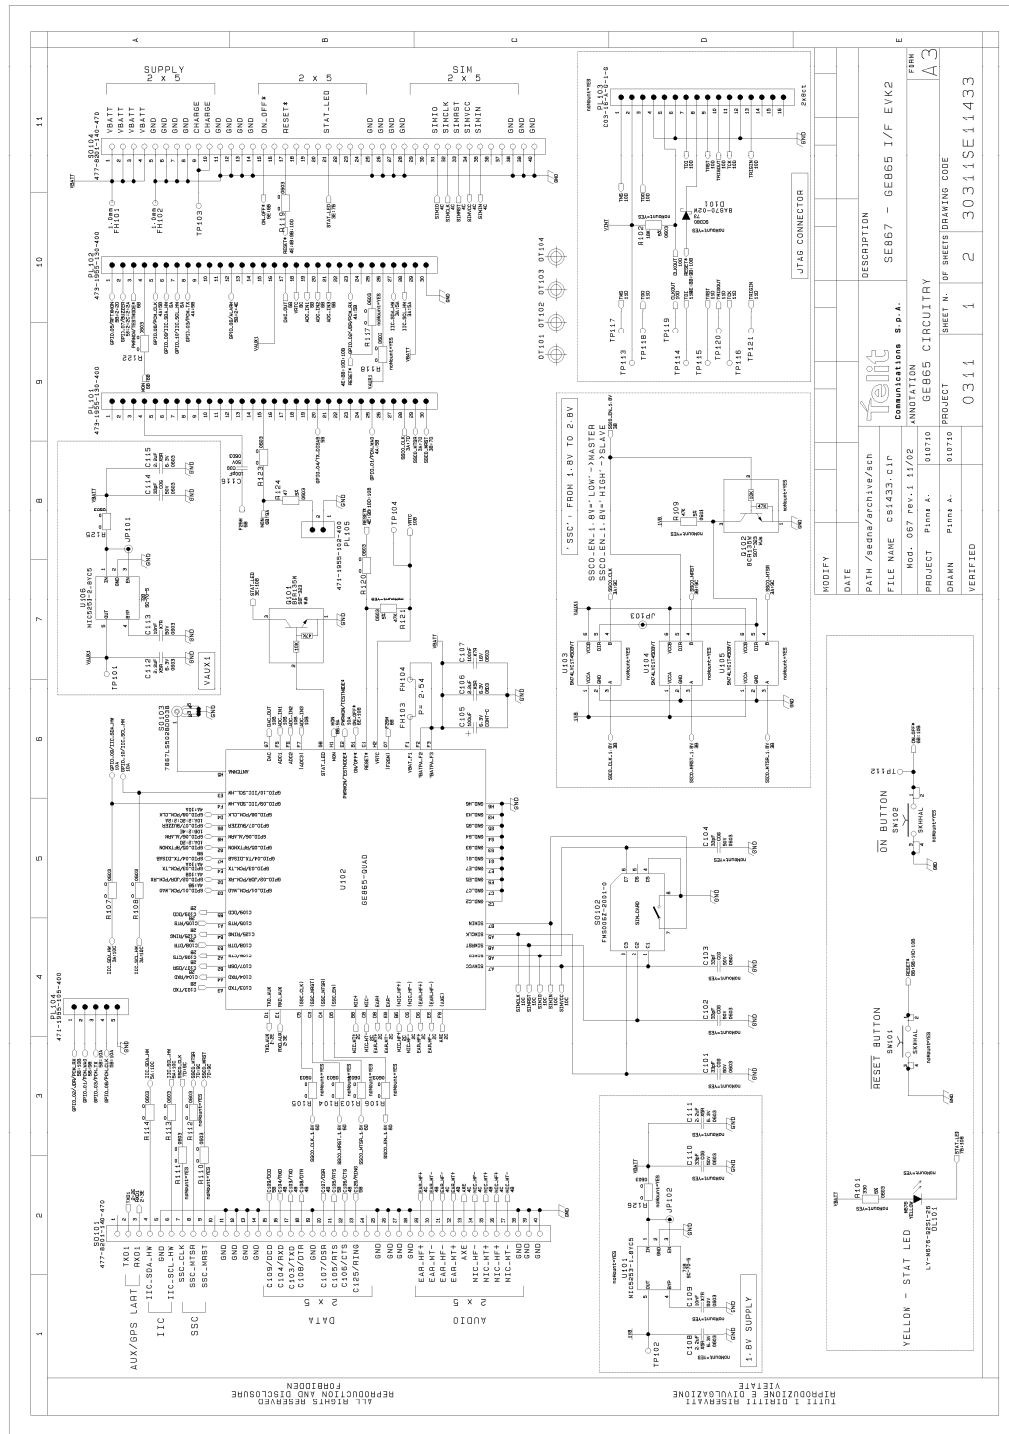


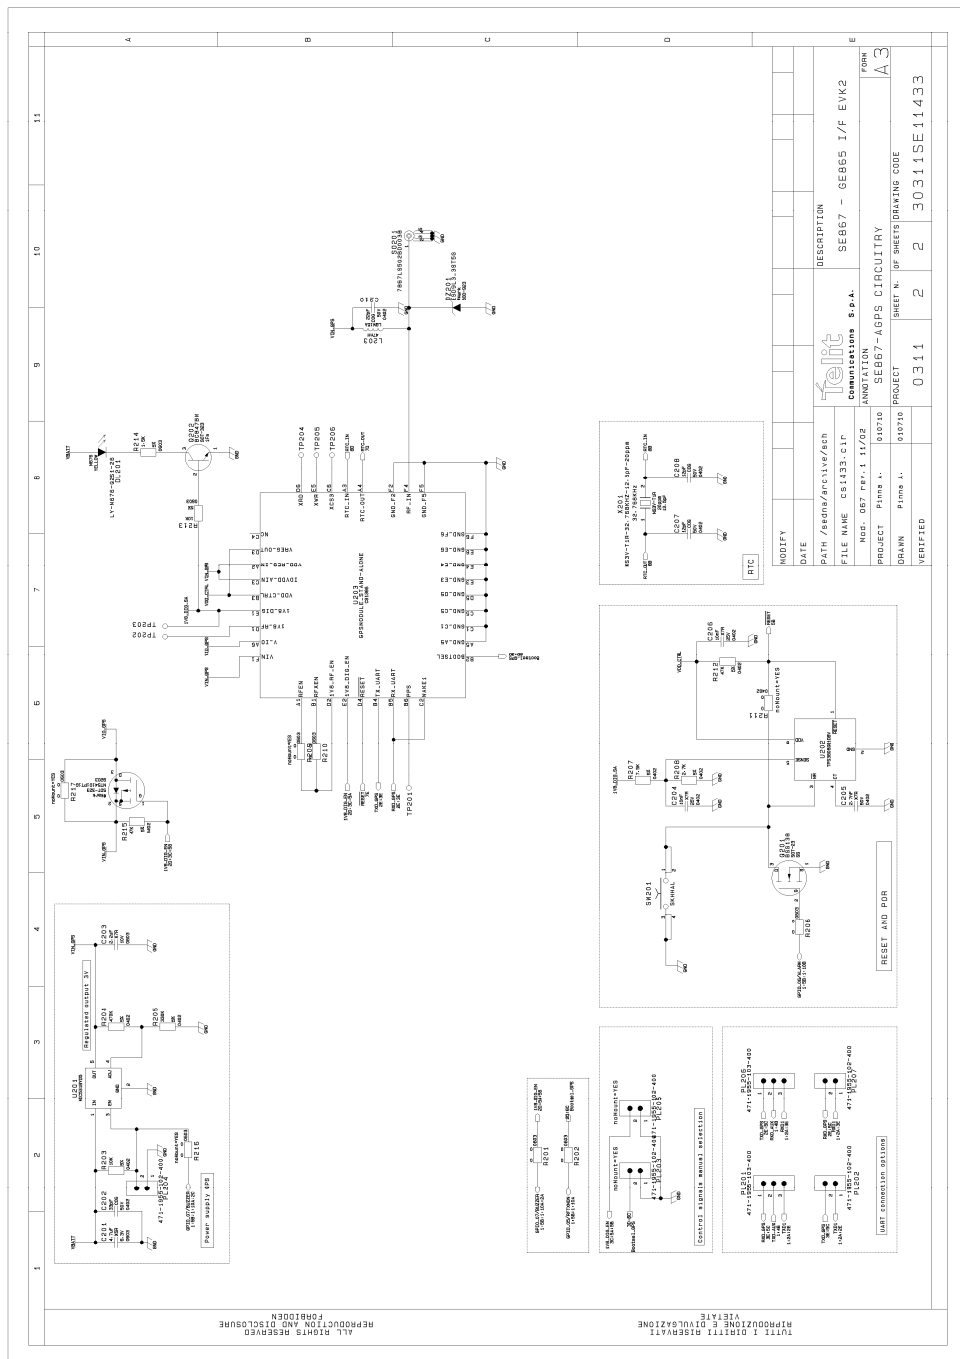


27.9. GE865 Interface board

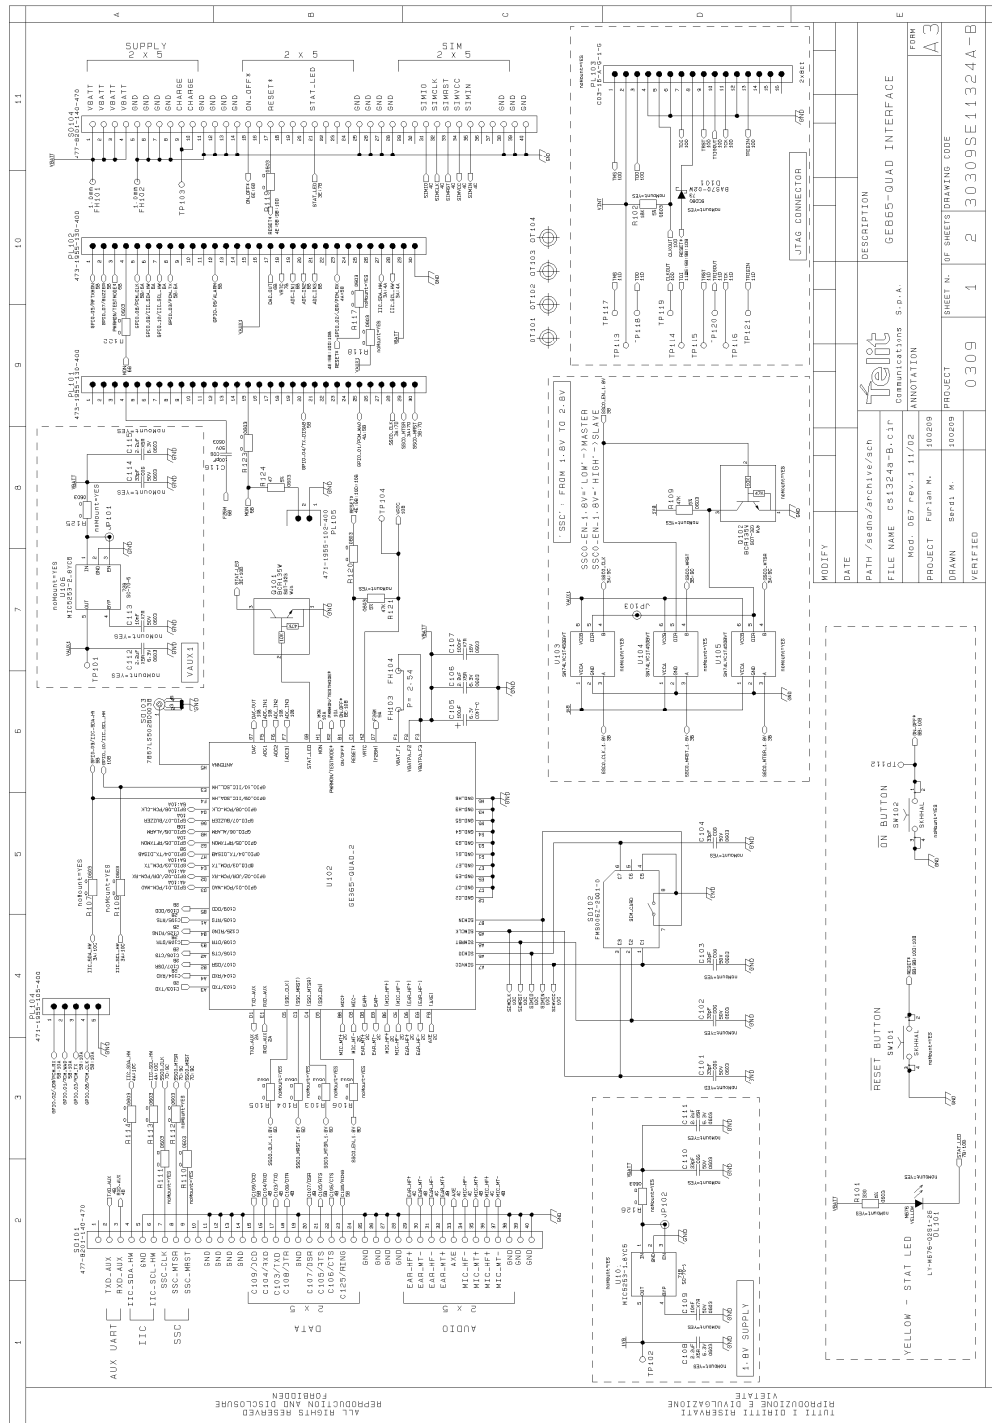


27.10. GL865 Interface board

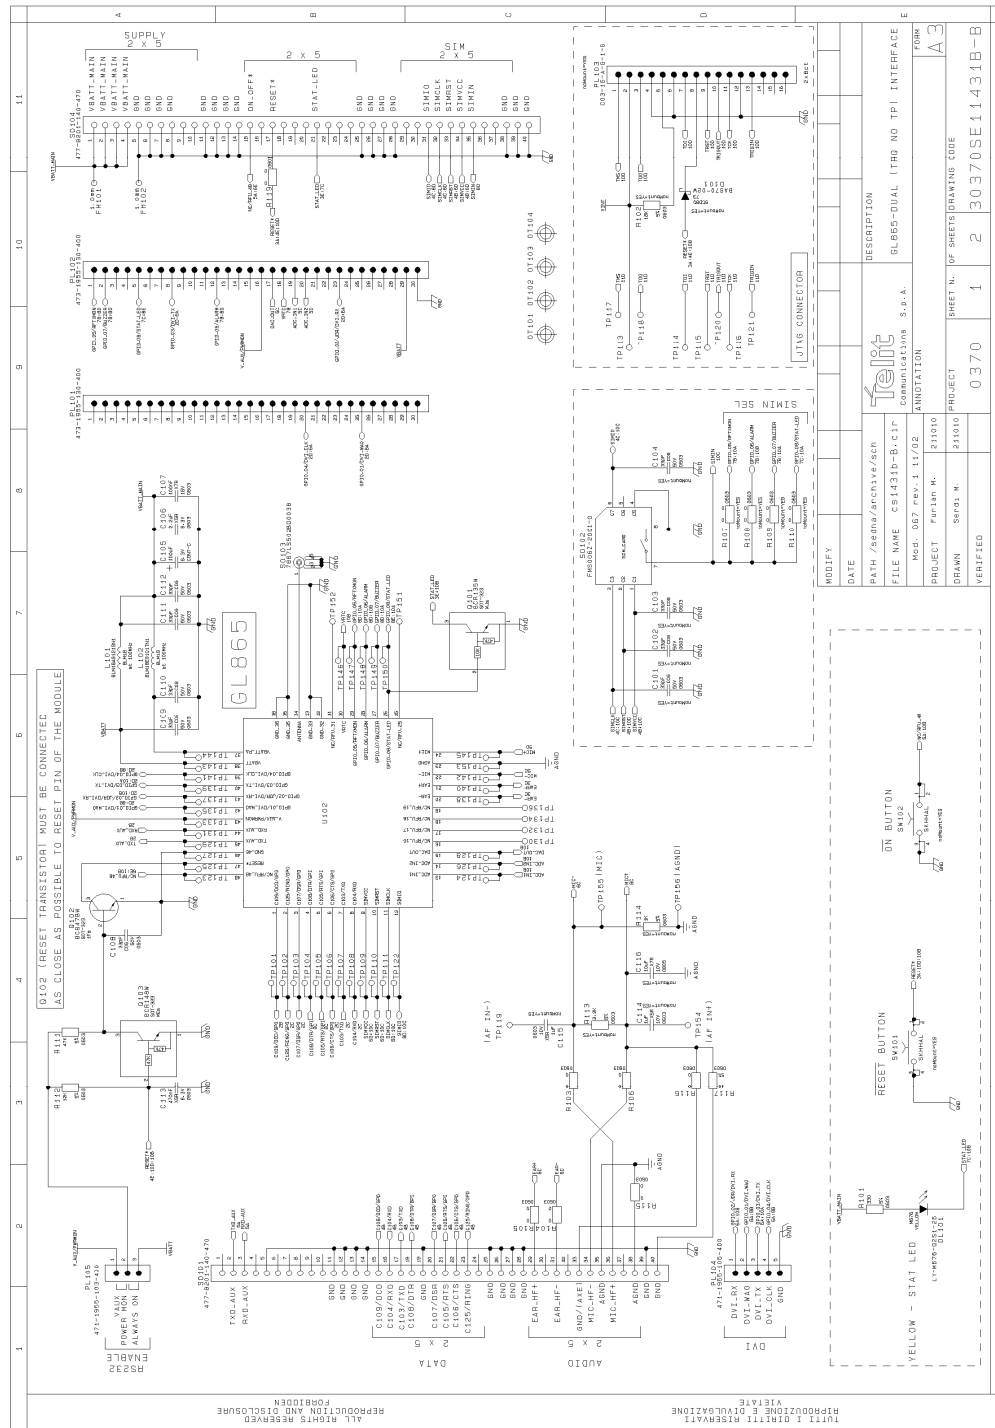


27.11. GC864 Interface board

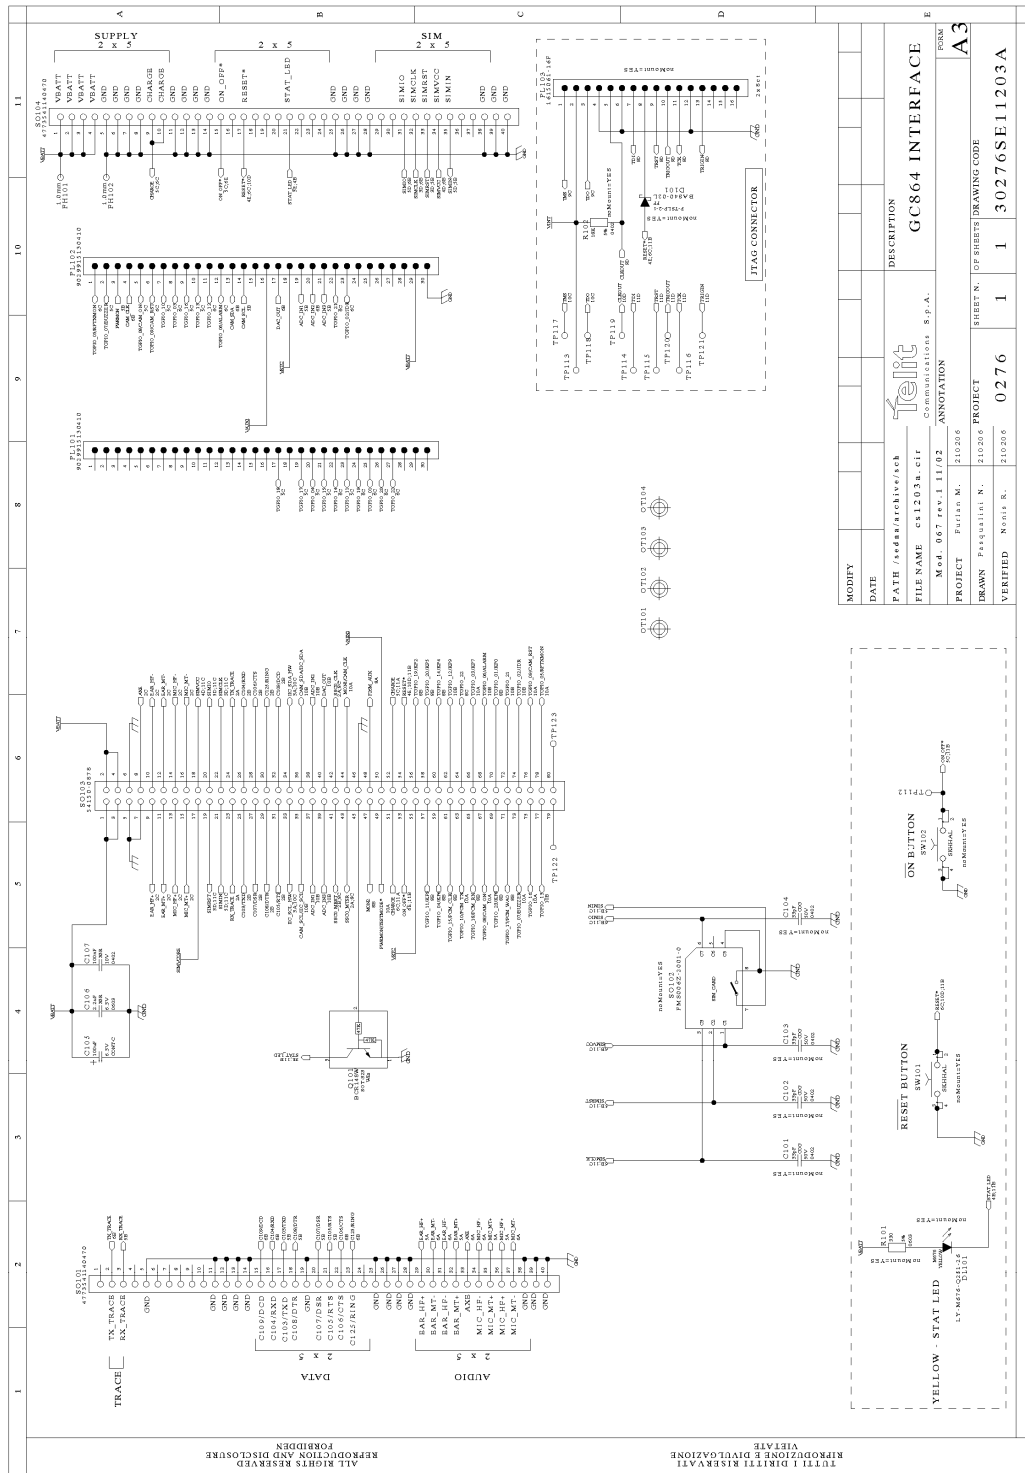


27.12. GC864-C2 Interface board

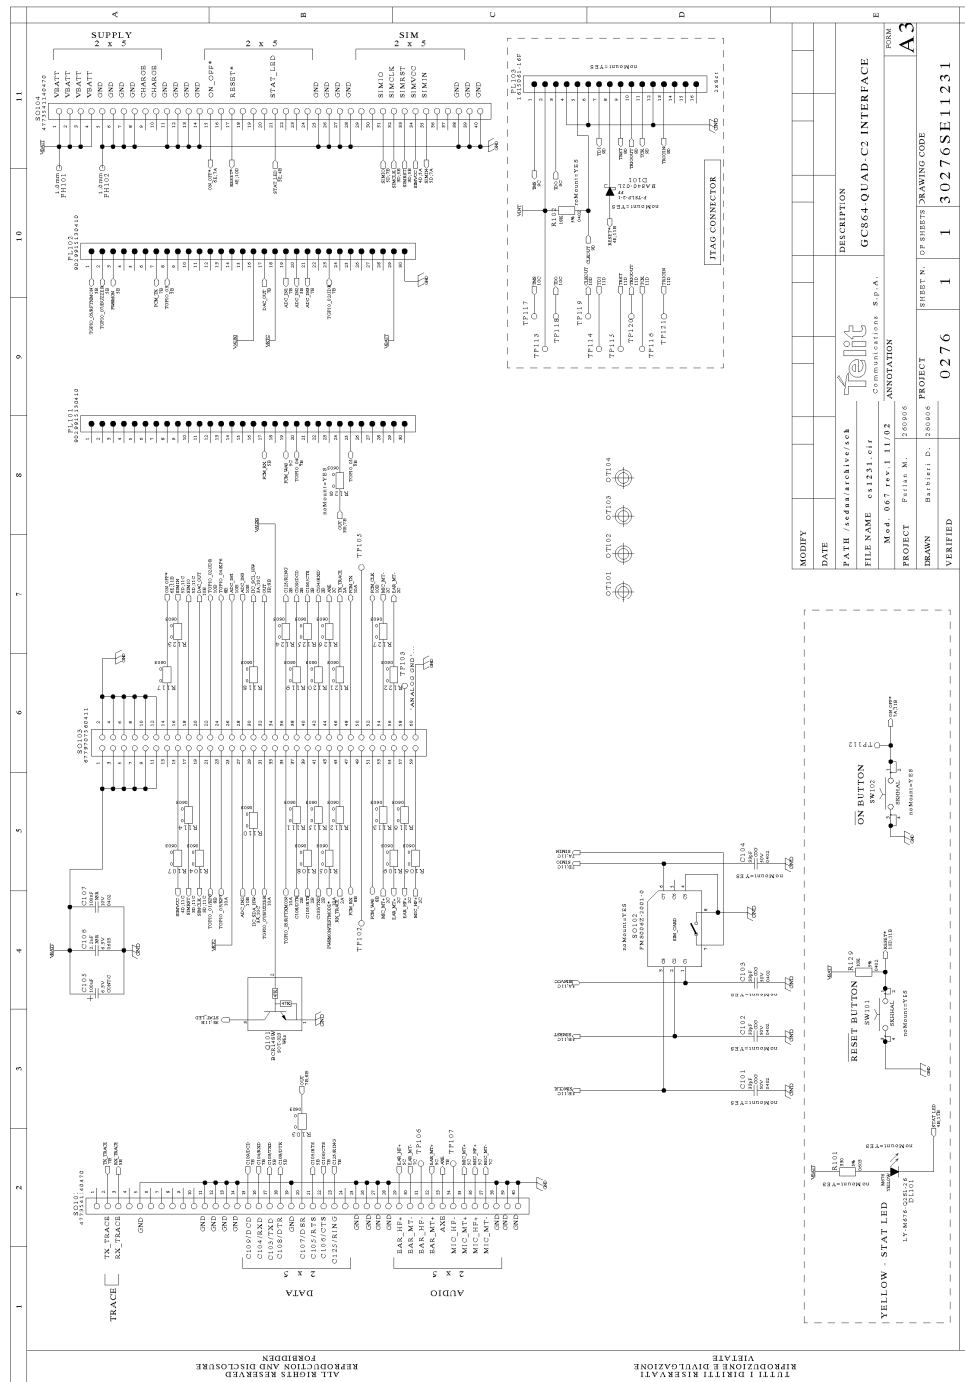


27.13. UC864 Interface board

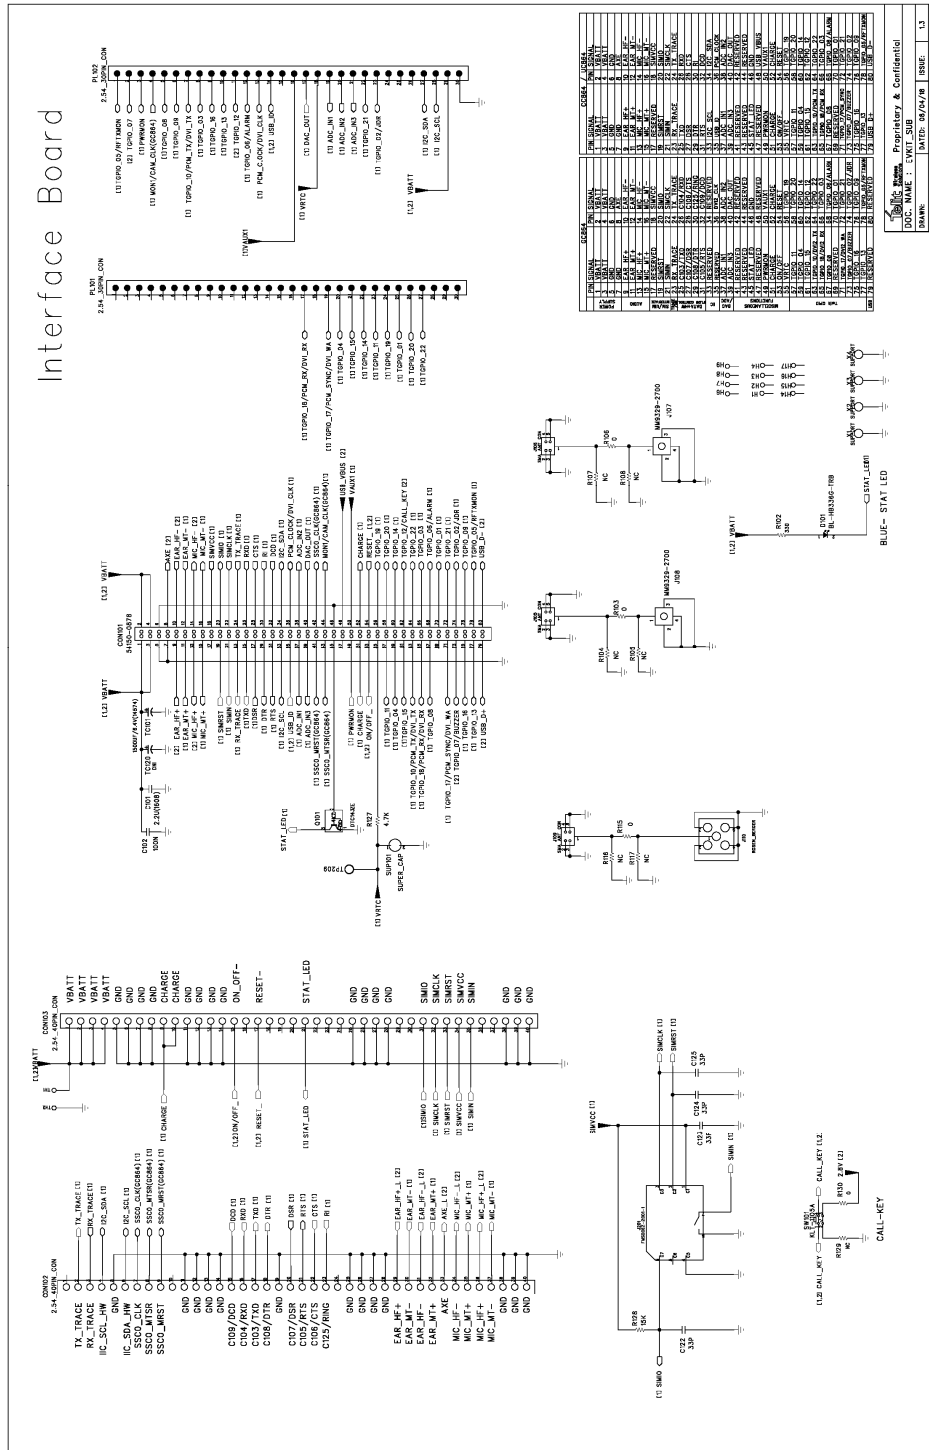


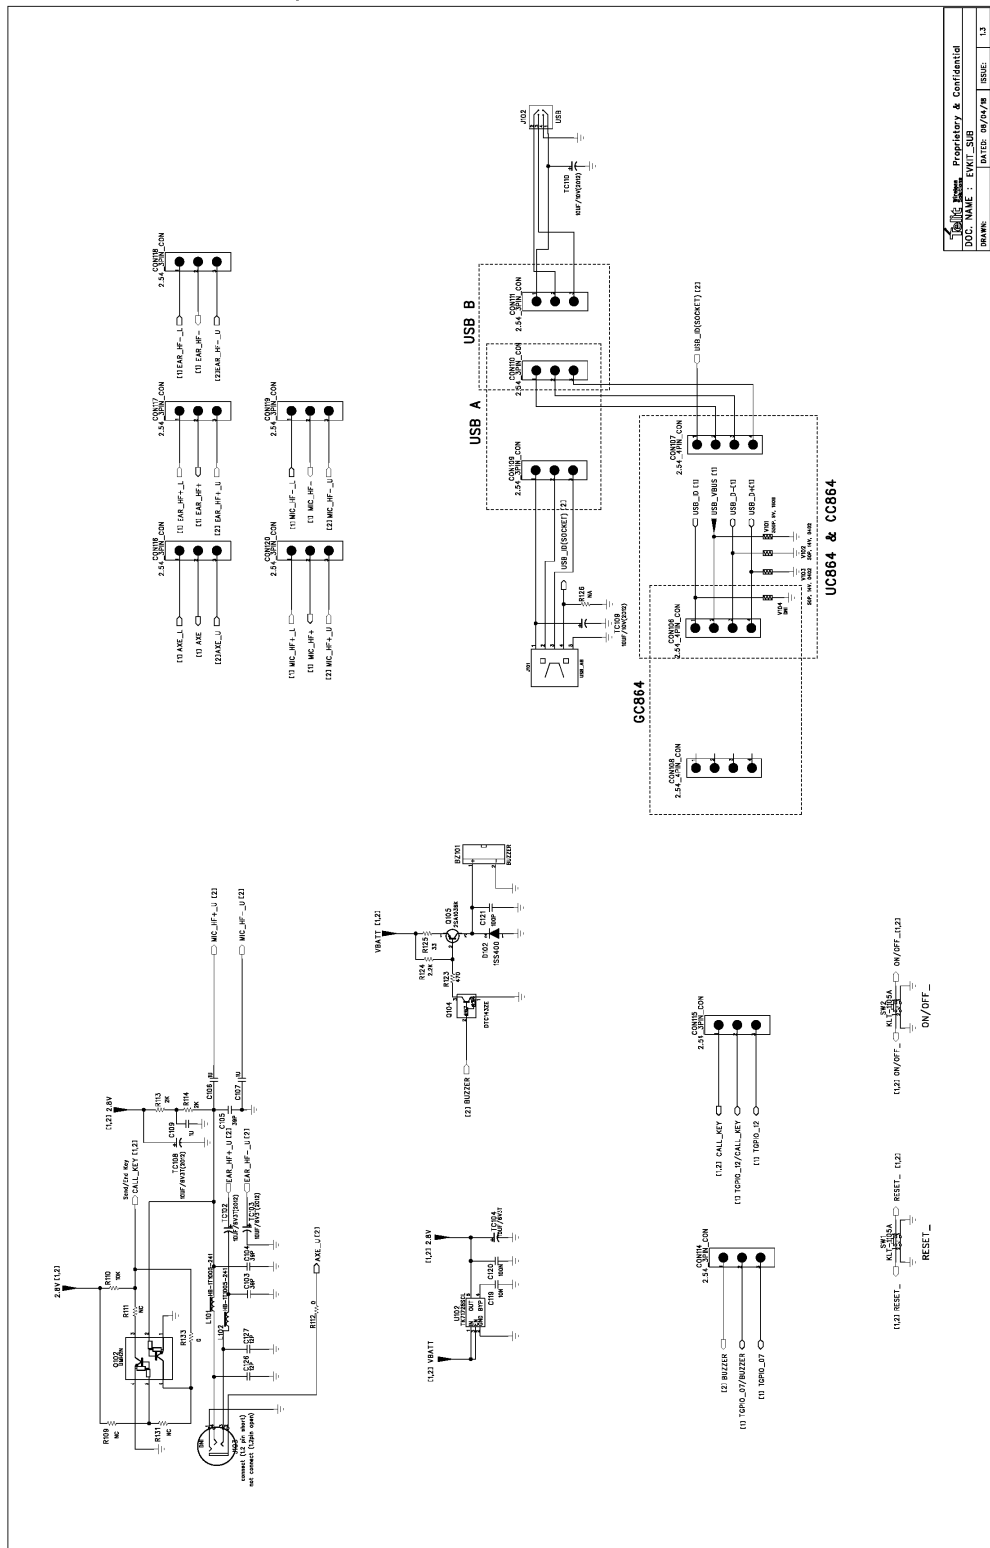


27.14. HE910 Interface board

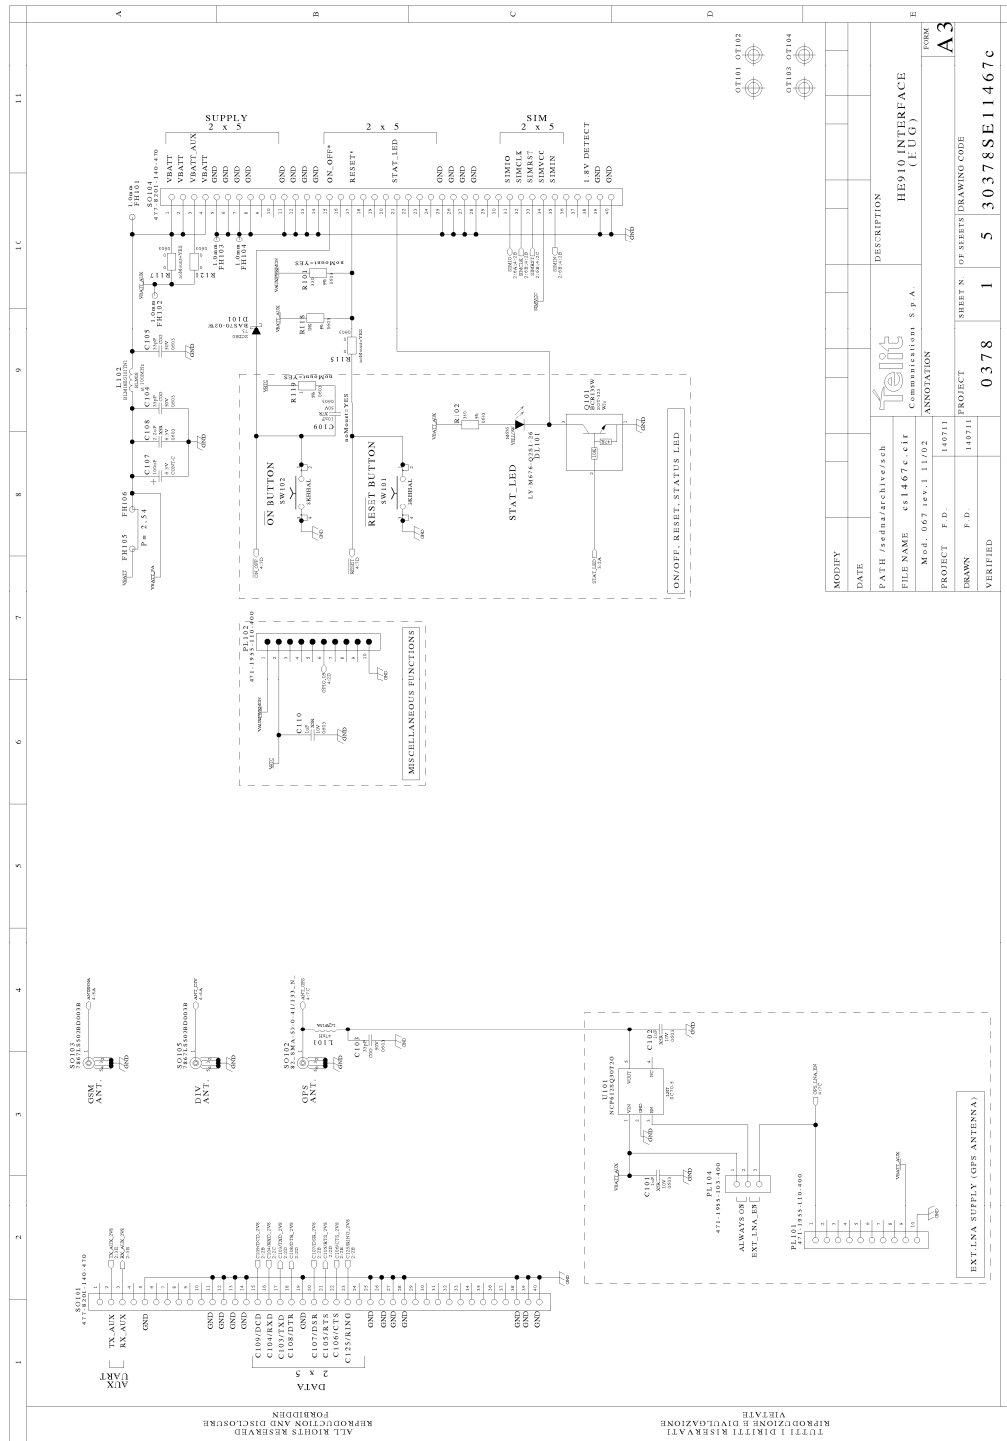


1vv0300704 Rev.13- 2012/06/25




Telit EVK2 User Guide
1vv0300704 Rev.13- 2012/06/25

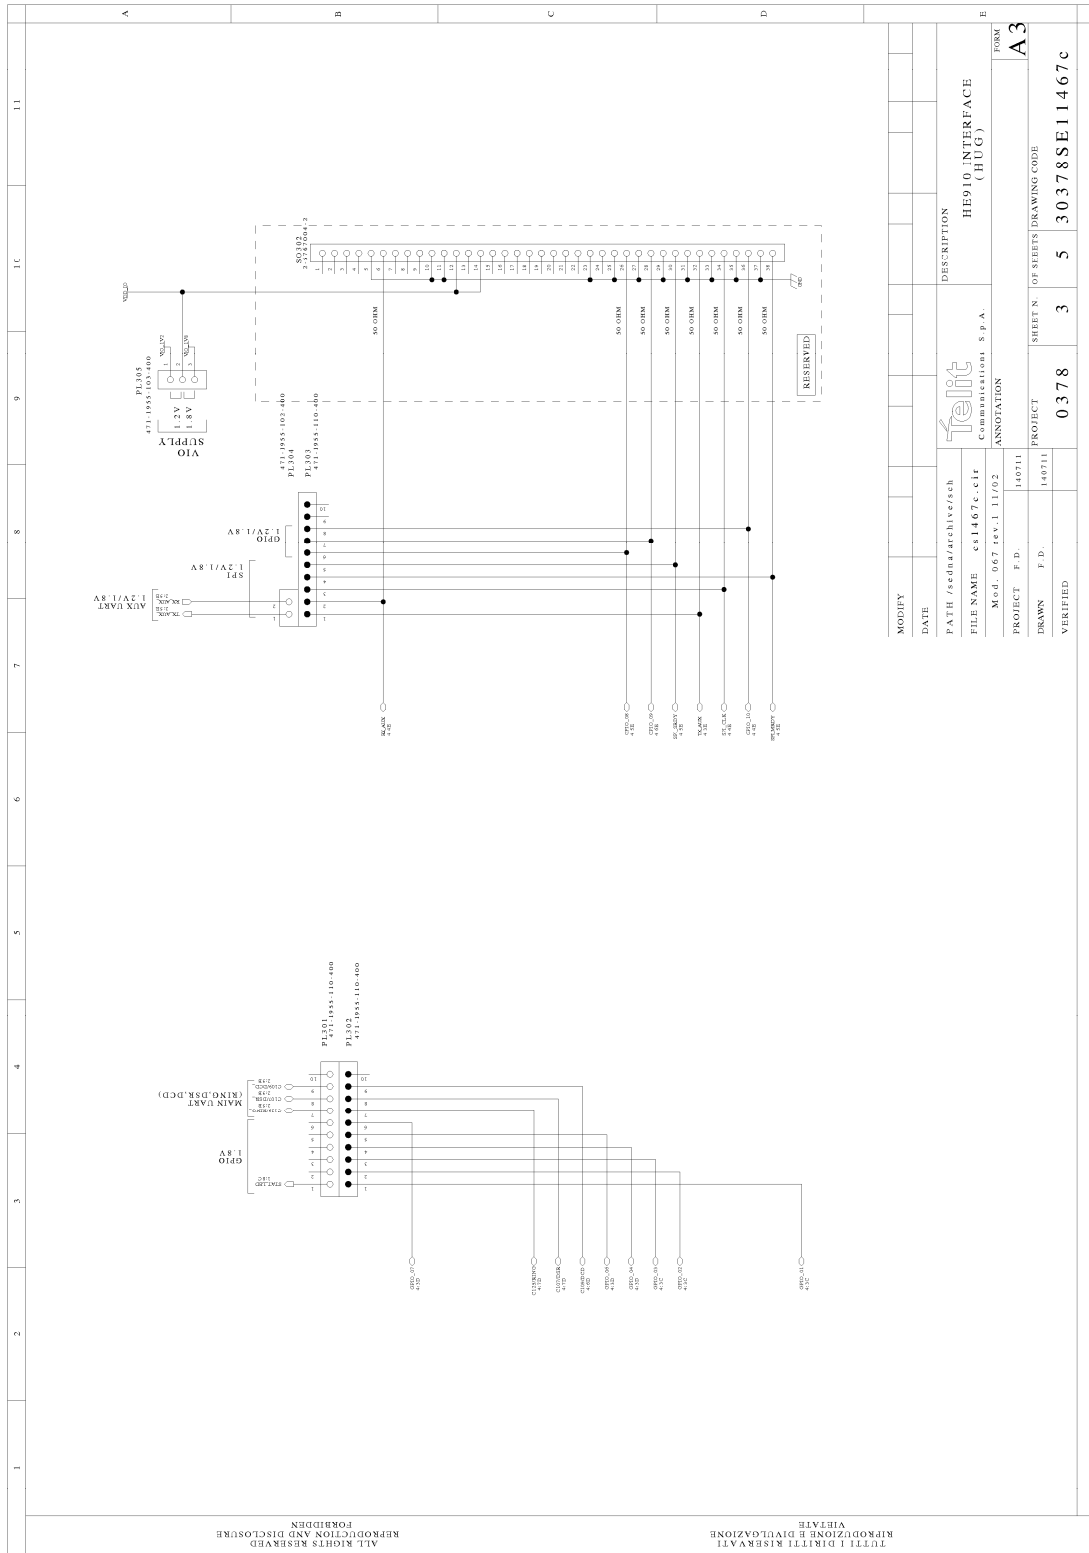

27.1. GE865 – JF2 Interface board

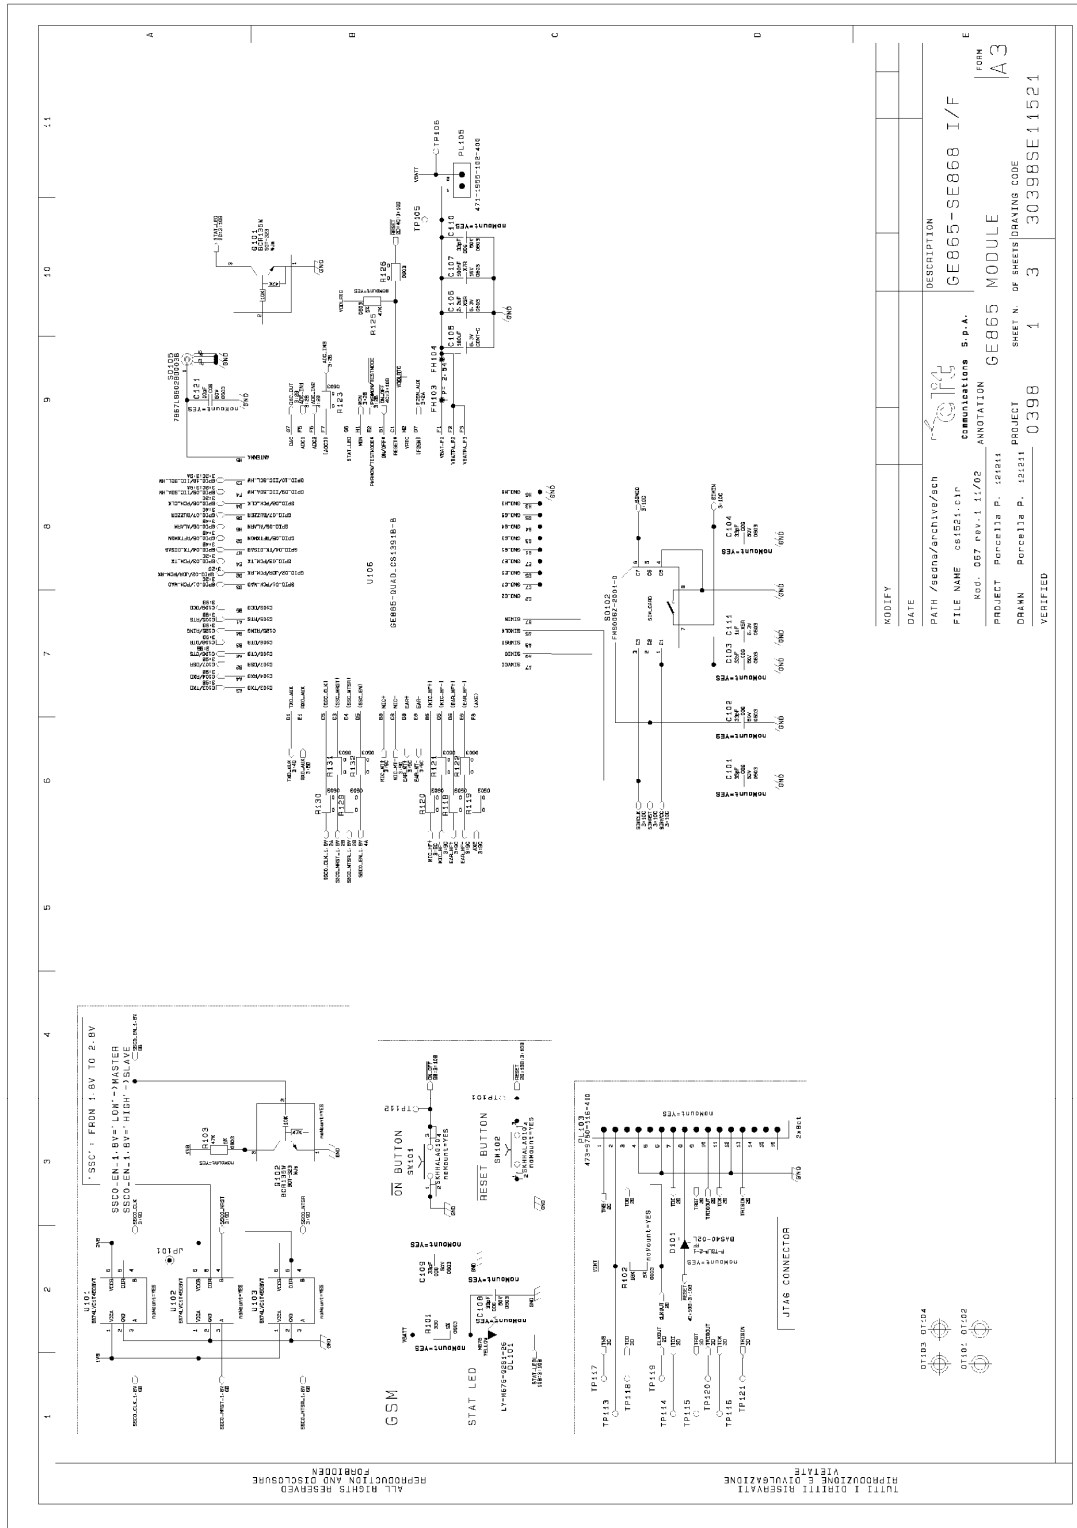

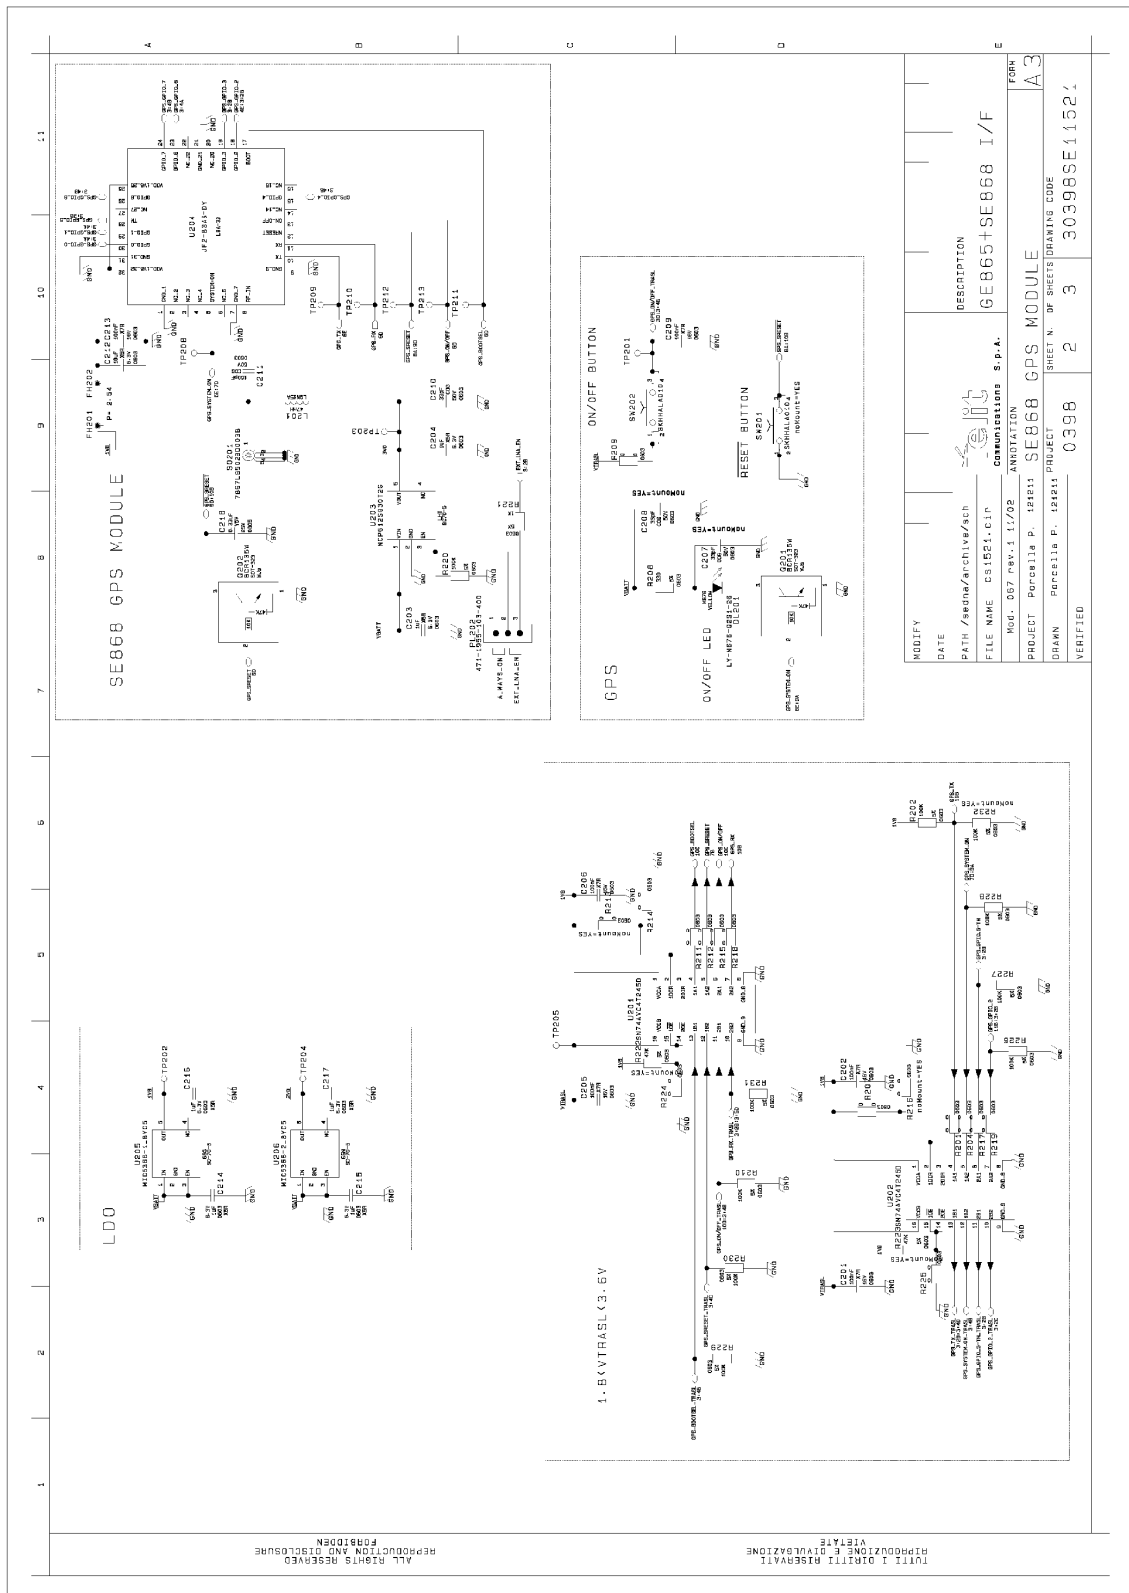

1 2 3 4 5 6 7 8 9 10 11

GPIO CONNECTORS

PL301 473-0855-153-445

MODE	GPIO	FUNCTION
SPI06	1	INT. pull-down
UART	2	15-16
IIC	3	15-16
SPI	4	15-16

PL302 473-0855-153-445

MODE	GPIO	FUNCTION
SPI06	1	INT. pull-down
UART	2	15-16
IIC	3	15-16
SPI	4	15-16

PL303 473-0855-153-445

MODE	GPIO	FUNCTION
SPI06	1	INT. pull-down
UART	2	15-16
IIC	3	15-16
SPI	4	15-16

GPS SERIAL I/F CONFIGURATION

MODE	GPIO	FUNCTION
SPI06	1	INT. pull-down
UART	2	15-16
IIC	3	15-16
SPI	4	15-16

GPS SYSTEM ON POWER MANAGEMENT

MODE	GPIO	FUNCTION
SPI06	1	INT. pull-down
UART	2	15-16
IIC	3	15-16
SPI	4	15-16

ACCELEROMETER

MODE	GPIO	FUNCTION
SPI06	1	INT. pull-down
UART	2	15-16
IIC	3	15-16
SPI	4	15-16

TM (GPS time mark pulse)

MODE	GPIO	FUNCTION
SPI06	1	INT. pull-down
UART	2	15-16
IIC	3	15-16
SPI	4	15-16

1 2 3 4 5 6 7 8 9 10 11

EVK2 CONNECTORS PINOUT

SSCO or USB to EVK2 selection:

1-2 : SSC0-CLK to EVK2
4-5 : SSC0-MTMR to EVK2
7-8 : SSC0-MRST to EVK2
5-6 : TX-USB to EVK2
2-3 : RX-USB to EVK2

1 2 3 4 5 6 7 8 9 10 11

USB/RS232 to EVK2 or modules connect. selection:

2-2 : TXD-AUX -> TX-RS232
7-8 : RXD-AUX -> RX-RS232
2-4 : GPS-TX-TRASL -> TX-RS232
8-10 : GPS-RX-TRASL -> RX-RS232
1-3 : TXD-AUX -> TX-USB
7-9 : RXD-AUX -> RX-USB
3-4 : GPS-TX-TRASL -> TX-USB
9-10 : GPS-RX-TRASL -> RX-USB
4-6 : GPS-TX-TRASL -> RXD-AUX
10-12 : GPS-RX-TRASL -> TXD-AUX

1 2 3 4 5 6 7 8 9 10 11

MODIFY

DATE

FILE NAME CS1521.CIF

PROJECT Porcella p. 131511

VERIFIED

DESCRIPTION GE865+SE868 I/F

PROJECT 0398

SHEET N. 3

OF SHEETS 3

DRAWING CODE 30398SE11521

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved

page 140 of 149

28. Service and firmware update

You can update the Telit Module firmware through the serial cables (RS232 or USB 1.1) used for the communication with a PC. The firmware update can be done with a specific software tool provided by Telit that runs on windows based PCs.

All levels are conformed to RS232 and V.24 standard and a PC serial port can be directly connected to this connector.



29. SAFETY RECOMMENDATIONS

READ CAREFULLY

Be sure the use of this product is allowed in the country and in the environment required. The use of this product may be dangerous and has to be avoided in the following areas:

Where it can interfere with other electronic devices in environments such as hospitals, airports, aircrafts, etc

Where there is risk of explosion such as gasoline stations, oil refineries, etc

It is responsibility of the user to enforce the country regulation and the specific environment regulation.

Do not disassemble the product; any mark of tampering will compromise the warranty validity.

We recommend following the instructions of the hardware user guides for a correct wiring of the product. The product has to be supplied with a stabilized voltage source and the wiring has to be conforming to the security and fire prevention regulations.

The product has to be handled with care, avoiding any contact with the pins because electrostatic discharges may damage the product itself. Same cautions have to be taken for the SIM, checking carefully the instruction for its use. Do not insert or remove the SIM when the product is in power saving mode.

The system integrator is responsible of the functioning of the final product; therefore, care has to be taken to the external components of the module, as well as of any project or installation issue, because the risk of disturbing the GSM network or external devices or having impact on the security. Should there be any doubt, please refer to the technical documentation and the regulations in force.

Every module has to be equipped with a proper antenna with specific characteristics. The antenna has to be installed with care in order to avoid any interference with other electronic devices and has to guarantee a minimum distance from the people (20 cm). In case of this requirement cannot be satisfied, the system integrator has to assess the final product against the SAR regulation.

The European Community provides some Directives for the electronic equipments introduced on the market. All the relevant information's are available on the European Community website:

<http://europa.eu.int/comm/enterprise/rtte/dir99-5.htm>



The text of the Directive 99/05 regarding telecommunication equipments is available, while the applicable Directives (Low Voltage and EMC) are available at:

http://europa.eu.int/comm/enterprise/electr_equipment/index_en.htm

29.1. Disposal of this product in the European Union

According to the directives 2002/95/CE, 2002/96/CE and 2003/108/CE, which have been transposed in Italian Legislative Decree of July 25, 2005, n. 151, Telit Communications S.p.A informs that:

The symbol of the crossed-out wheeled bin reproduced on the product or on the packaging, indicates that the product, at the end of life cycle, must be gathered separately from the other waste.



The separate collection of rubbish for this product at the end of its life cycle is arranged and managed by the manufacturer.

The user, who wants to dispose the product, must contact the manufacturer and follow the available system that allows the separate collection of rubbish for this product that has reached the end of the life cycle.

The suitable separate collection of rubbish, necessary for the subsequent transfer of the obsolete product for the recycling, the treatment and the compatible environment disposal, contributes to avoid possible negative effects to the environment and the health, and helps in the re-use and/or recycle of the materials from which this product is composed.

The illegitimate disposal of the product by the holder implies the enforcement of the administrative penalties provided for the regulations in force.

The company is enrolled on the register of the manufacturers of Electric and Electronic Equipment (EEE) of the Italian Minister for the Environment with the number: **IT08020000002357**



Reference Directives and Laws

2002/95/EC	Directive of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)
2002/96/EC	Directive of the European Parliament and of the Council on waste electrical and electronic equipment (WEEE)
2003/108/EC	Directive of the European Parliament and of the Council of 8 December 2003 amending directive 2002/96/EC on waste electrical and electronic equipment (WEEE)
Italian Legislative Decree of July 25, 2005, n. 151	Attuazione delle direttive 2002/95/CE, 2002/96/CE e 2003/108/CE, relative alla riduzione dell'uso di sostanze pericolose nelle apparecchiature elettriche ed elettroniche, nonché allo smaltimento dei rifiuti.



30. RoHS Certifications



EU RoHS DECLARATION OF CONFORMITY




1.

PRODUCTS NAMES	Telit's CODE
EVK2	3990150474
GM882 INTERFACE	3990250670
GE863-PY INTERFACE	3990250684
GE863-GPS INTERFACE	3990250696
GE863-SIM INTERFACE	3990250703
GE864-PY INTERFACE	3990250672
GE864-QUAD V2 INTERFACE	3990250777
GE864-DUAL V2 INTERFACE	3990250778
GE864-QUAD AUTOMOTIVE V2 INTERFACE	3990250773
GE864-QUAD ATEX V2 INTERFACE	3990250772
GE864-QUAD SIM V2 INTERFACE	3990250771
GE864-GPS INTERFACE	3990250820
GC864 INTERFACE	3990250880
GC864-QUAD-C2 INTERFACE	3990250893
GE865-QUAD INTERFACE	3990250786
GE865/GE867-AGPS INTERFACE	3990250814
GL865-QUAD INTERFACE	3990250812
GL865-DUAL INTERFACE	3990250783
GL868-DUAL INTERFACE	3990250790
UC884 INTERFACE	4990150470
HE910 EVK2 INTERFACE	3990250829

2. Telit Communications S.p.A Via Stazione di Prosecco, 5/b 34010 Sgonico (TRIESTE)-ITALY (manufacturer).

3. This declaration of conformity is issued under the sole responsibility of the manufacturer.

4. Evaluation board for product's development and product's specific interfaces.

5. The products described above are in conformity with EU Community harmonisation 2002/95/CE (EU-ROHS Directive) on Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (RoHS), subsequent amendments and the European Court of Justice decision on Deca-BDE substances from July 1, 2008.

6. This information represents Telit's knowledge and belief as of the date that it is provided. Telit bases its material content knowledge on information provided by third parties and has taken and continues to take commercially reasonable steps to provide representative and accurate information, but may not have conducted chemical analysis on incoming materials and chemicals.

The documents relevant to the products described above and which support this Declaration of Conformity, are held at Telit Communications S.p.A Via Stazione di Prosecco, 5/b 34010 Sgonico (TRIESTE) ITALY that managed the compliance assessment process.

Signed on behalf of Telit Communications S.p.A.

Trieste, **2011-07-21**




Quality System Manager
Cesare Robelli

Mod 0216 2011-06 Rev.0 - This Declaration of Conformity is issued in compliance with 768/2008/EC



31. Disposal of old Electrical & Electronic Equipment (WEEE Mark)

This symbol, applied on our products and/or on its packaging, indicates that this product should not be treated as household waste when you wish to dispose of it. Instead, it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate disposal of this product. The recycling of materials will help to conserve natural resources. For more detailed information about the recycling of this product, please contact your local city office, household waste disposal service or the retail store where you purchased this product.



32. Document History

Revision	Date	Changes
Rev 0	05/01/2006	First issue
Rev 1	23/01/2006	Added PCB weight and dimensions pag.9 Added default setup pag.8 Correct mA/h with mAh pag.16 Unified the scripting “impedance coil” pag.19 and pag.20 Insert the power supply pag.7 Correct the serial lines scripting on block diagrams Insert the pin number of CS1150 connector. Correct the serial interfaces descriptions pag.7
Rev 2	31/01/2006	Modified in chapter 11.1 description of CS1170 pag. 29
Rev.3	14/04/2006	Moved par.2.2 to par.4 and extended the STARTUP PROCEDURE to pag.11 Par.3 pag.9: Added mother boards block diagrams Pag.11: Correct GE863 Interface physical dimensions and added Dual Camera Interface physical dimensions. Moved par.4.4 and 4.5 to par.6.5 as Application Notes Moved par.7.3, 7.4 and 7.5 to par.9.3 as Warning Pag.26: Correct the Reset Button function description. Pag.20: Updated the Cross List Table From par.14 to par.18: Added interfaces description Removed all “Interface Board” “Printed Circuits Name” cross references Par.20: Added all electric diagrams.
Rev.4	14/07/2006	Replaced GC864 interface photo pag.46



Telit EVK2 User Guide

1vv0300704 Rev.13- 2012/06/25

Rev.5	13/10/2006	Renamed figure from 38 to 42 Pag.2 Added products name and P/N for GE863-PY/QUAD interface and GC864-C2 interface 3.2.6 Added mechanical characteristics GC864-C2 interface 5.0 Correct Optically Positioning Guide system description 7.1 Correct the line selection description 6.5.2 Updated Current Charger footnote Generality: added note for the VGA camera Added in the Cross List GE864-PY/QUAD interface and GC864-C2 interface 15.2.1 Inserted P/N of GE863-GPS version Added GC864-C2 interface description 20.1 Corrected GPIO location and added p/n of GM862 interface 20.2 Corrected GPIO location and added p/n of GE863-GPS interface Corrected GPIO location and added p/n of GE863 interface Corrected GPIO location and added p/n of GE864 interface Corrected GPIO location and added p/n of GC864 interface Corrected GPIO location and added p/n of GC864-C2 interface Added GC864-C2 interface Schematic GM862 Interface p/n 3990250670: added RoHS certification GE863-PY Interface p/n 3990250669: added RoHS certification GE863-GPS Interface p/n 3990250671: added RoHS certification GE863-PY Interface p/n 3990250684: added RoHS certification GC864-QUAD Interface p/n 3990250685: added RoHS certification GE864-PY Interface p/n 3990250672: added RoHS certification GC864-PY Interface p/n 3990250680: added RoHS certification
Rev.6	24/05/2007	Pag. 2 Product Table updated Pag. 10 Table 1 updated Pag.24 Modified the formula Pag.22 Inserted the Audio Section chapter Pag.39 Table 10 modified PCB release updating Erased all Dual Camera paragraph Figures and table updated Paragraph 15.3 16.2 17.3 18.3 19.3 inserted 24.1 EVK2 SYS p/n 3990150463: added RoHS certification 24.9 GE864-QUAD Interface p/n 3990250688: added RoHS certification 24.11 GE864-QUAD-C2 Interface p/n 3990250683: added RoHS certification



Telit EVK2 User Guide

1vv0300704 Rev.13- 2012/06/25

Rev.7	22/01/2008	Pag. 2 Product Table updated with UC864-E and GE863-SIM Pag.7 Disclaimer Date modified Pag.13 Inserted UC864 Interface dimensions Pag.36 Inserted refer to GE863-SIM Pag.38 Table 10 Inserted UC864 and GE863-SIM Interface Code Pag.38 Order Code Table updated Pag.42 Added figure 24 with GE863-SIM photo Pag.43 Added GE863-SIM version kit list Pag.54 Inserted UC864 Interface photo Pag.64 Inserted figure 40 and Table 17 of UC864 GPIO positioning Pag.77-78 Inserted UC864 Interface Schematic diagrams Removed notes regarding interface board of phased out models from the GE863 family (Please refer to the previous version of this document if you need information for the interfaces with the following P/N: 3990250669 & 3990250677)
Rev.8	20/03/2008	Pag.64 Updated 40 and Table 19 of UC864 GPIO positioning Pag.66-70 Updated EVK mother board schematics Pag.81 Added new European WEEE directive
Rev9	28/05/2008	Pag.77-78 Replaced UC864 Interface board schematics with more readable drawings.
Rev10	20/06/2011	Pag.02 Replaced the applicability list – Pag.123 replaced the RoHS certifications
Rev11	18/07/2011	HE910 added to the document GE864-GPS section update to align with latest PCB development
Rev 12	2012/05/21	Added GE865-JF2 sections
Rev 13	2012/06/25	Updated fig.48 Updated HE910 interface board P/N in applicability Table. Update GE865+JF2 drawings §27.1

