

8961724 TEXAS INSTR (LIN/INTFC)

91D 75047 D

**SN75491, SN75491A, SN75492, SN75492A
MOS-TO-LED DRIVERS**

D2355, OCTOBER 1972—REVISED SEPTEMBER 1986

**QUAD SEGMENT DRIVER AND HEX DIGIT DRIVER FOR INTERFACING
BETWEEN MOS AND LIGHT-EMITTING-DIODE (LED) DISPLAYS**

T-52-13-07

- 50-mA Source or Sink Capability ('491, '491A)
- 250-mA Sink Capability ('492, '492A)
- Rated for 10-V Operation ('491, '492)
- Rated for 20-V Operation ('491A, '492A)
- Low Input Current for MOS Compatability
- Low Standby Power
- High-Gain Darlington Circuits

description


The SN75491, SN75491A, SN75492, and SN75492A are monolithic integrated circuits designed to be used together with MOS integrated circuits and common-cathode LED's in serially addressed multi-digit displays. This time-multiplexed system, which uses a segment-address-and-digit-scan method of LED drive, minimizes the number of drivers required.

The SN75491 and SN75491A are quadruple segment drivers. The SN75492 and SN75492A are hex digit drivers. The SN75491 and SN75492 are characterized for operation to 10 volts. The SN75491A and SN75492A are characterized for operation to 20 volts.


The SN75491, SN75491A, SN75492, and SN75492A are characterized for operation from 0°C to 70°C.

logic diagram (each driver)

SN75491, SN75491A



SN75492, SN75492A

SN75491, SN75491A
N DUAL-IN-LINE PACKAGE

(TOP VIEW)

1A	1	14	4A
1E	2	13	4E
1C	3	12	4C
GND	4	11	VSS
2C	5	10	3C
2E	6	9	3E
2A	7	8	3A


SN75492, SN75492A
N DUAL-IN-LINE PACKAGE

(TOP VIEW)


1Y	1	14	1A
2Y	2	13	6Y
2A	3	12	6A
GND	4	11	VSS
3A	5	10	5A
3Y	6	9	5Y
4Y	7	8	4A

logic symbols†

SN75491, SN75491A

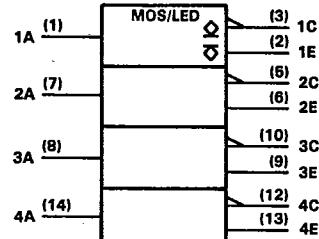

SN75492, SN75492A

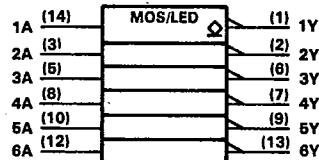

†These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1986, Texas Instruments Incorporated

**TEXAS
INSTRUMENTS**


POST OFFICE BOX 655012 • DALLAS, TEXAS 75266

8961724 TEXAS INSTR (LIN/INTFC)

91D 75048 D

**SN75491, SN75491A, SN75492, SN75492A
MOS-TO-LED DRIVERS**

T-52-13-07

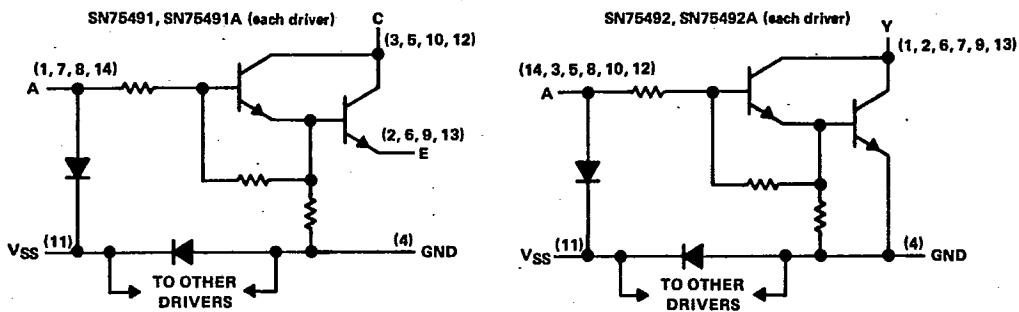schematics**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)**

	SN75491	SN75491A	SN75492	SN75492A	UNIT
Input voltage range (see Notes 1 and 2)	-5 V to V _{SS}	V			
Collector (output) voltage, V _C	10	20	10	20	V
Collector (output)-to-input voltage	10	20	10	20	V
Emitter-to-ground voltage (V _E ≥ 5 V)	10	20			V
Emitter-to-input voltage	5	5			V
Voltage at V _{SS} terminal with respect to any other device terminal	10	20	10	20	V
Collector (output) current, I _C	50	50	250	250	mA
Each collector (output)	200	200	600	600	
All collectors (outputs)					
Continuous total dissipation at (or below) 25°C free-air temperature (see Note 3)	875	875	875	875	mW
Operating free-air temperature range	0 to 70	0 to 70	0 to 70	0 to 70	°C
Storage temperature range	-65 to 150	-65 to 150	-65 to 150	-65 to 150	°C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	260	260	260	260	°C

- NOTES: 1. All voltage values are with respect to network ground terminal.
 2. The input is the only device terminal that may be negative with respect to ground.
 3. For operation at 25°C free-air temperature, refer to Dissipation Derating Curves in Appendix A. For these devices in the N package, use the 7-mW/°C curve.

'491, '491A electrical characteristics, V_{SS} = 10 V for SN75491, V_{SS} = 20 V for SN75491A, TA = 0°C to 70°C (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP [†]	MAX	UNIT
V _{CE(on)} On-State collector-emitter voltage	Input = 8.5 V through 1 kΩ, V _E = 5 V, I _C = 50 mA, TA = 25°C	0.9	1.2		V
	Input = 8.5 V through 1 kΩ, V _E = 5 V, I _C = 50 mA		1.5		
I _{C(off)} Off-state collector current	V _C = V _{SS} , V _E = 0, I _I = 40 μA	100			μA
	V _C = V _{SS} , V _E = 0, V _I = 0.7 V	100			
I _I Input current at maximum input voltage	V _I = V _{SS} , V _E = 0, I _C = 20 mA	'491	2.2	3.3	mA
	I _C = 20 mA	'491A	4.7	6.5	
I _E Emitter reverse current	V _I = 0, V _E = 5 V, I _C = 0	100			μA
I _{SS} Current into V _{SS} terminal		1			mA

[†]All typical values are at TA = 25°C.

8961724 TEXAS INSTR (LIN/INTFC)

91D 75049 D

SN75491, SN75491A, SN75492, SN75492A
MOS-TO-LED DRIVERS

T-52-13-07

'492, '492A electrical characteristics, V_{SS} = 10 V for SN75492, V_{SS} = 20 V for SN75492A, T_A = 0°C to 70°C (unless otherwise noted)

PARAMETER	TEST CONDITIONS		MIN	TYP [†]	MAX	UNIT
	Input = 6.5 V through 1 kΩ, I_{OL} = 260 mA, T_A = 25°C	Input = 6.5 V through 1 kΩ, I_{OL} = 250 mA, V_{OH} = V_{SS} , V_I = 40 μA				
I_{OH} High-level output current	V_{OH} = V_{SS} , V_I = 0.5 V	V_{OH} = V_{SS} , V_I = 0.5 V	200	200	200	μA
I_I Input current at maximum input voltage	V_I = V_{SS} , I_{OL} = 20 mA	'492	2.2	3.3	3.3	mA
I_{SS} Current into V_{SS} terminal		'492A	4.7	6.5	6.5	mA
			1	1	1	mA

[†]All typical values are at T_A = 25°C.SN75491, SN75491A switching characteristics, V_{SS} = 7.5 V, T_A = 25°C

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH} Propagation delay time, low-to-high-level output (collector)	V_{IH} = 4.5 V, V_E = 0, R_L = 200 Ω, C_L = 15 pF	100		ns	
t_{PHL} Propagation delay time, high-to-low-level output (collector)	R_L = 200 Ω, C_L = 15 pF	20		ns	

SN75492, SN75492A switching characteristics, V_{SS} = 7.5 V, T_A = 25°C


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH} Propagation delay time, low-to-high-level output	V_{IH} = 7.5 V, R_L = 39 Ω	300		ns	
t_{PHL} Propagation delay time, high-to-low-level output	C_L = 15 pF	30		ns	

3

Display Drivers

PARAMETER MEASUREMENT INFORMATION

SN75491, SN75491A

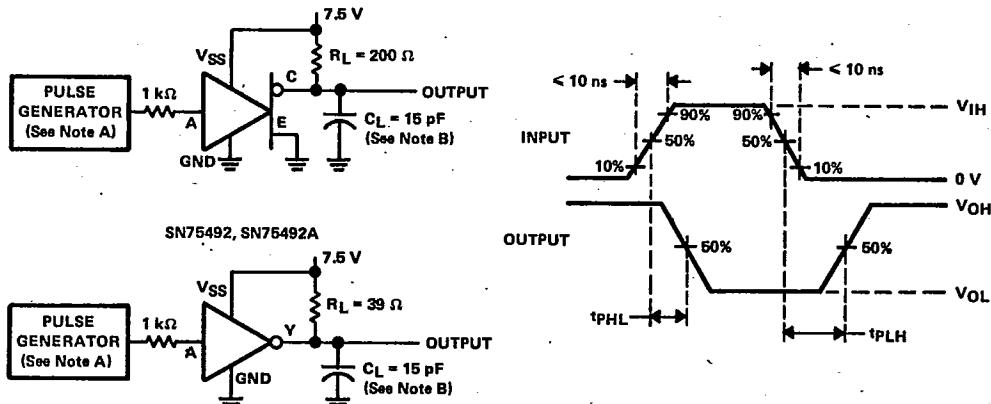

TEST CIRCUITS

VOLTAGE WAVEFORMS

NOTES: A. The pulse generator has the following characteristics: Z_{out} = 50 Ω, PRR ≤ 100 kHz, t_w = 1 μs.
 B. C_L includes probe and jig capacitance.

FIGURE 1. PROPAGATION DELAY TIMES

8961724 TEXAS INSTR (LIN/INTFC)

91D 75050 D

SN75491, SN75491A, SN75492, SN75492A
MOS-TO-LED DRIVERS

T-52-13-07

TYPICAL CHARACTERISTICS

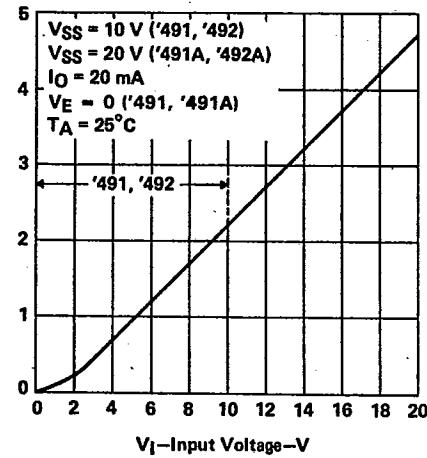
3
Display DriversINPUT CURRENT
vs
INPUT VOLTAGE

FIGURE 2

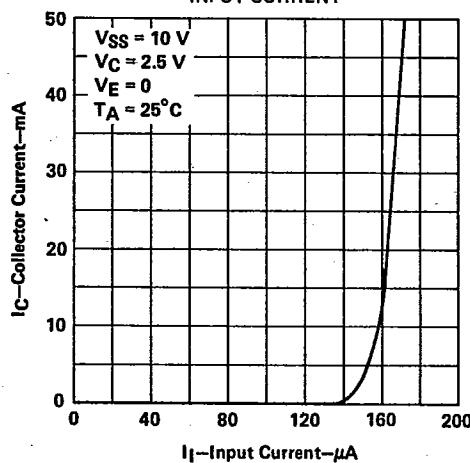
SN75491, SN75491A
COLLECTOR CURRENT
vs
INPUT CURRENT

FIGURE 3

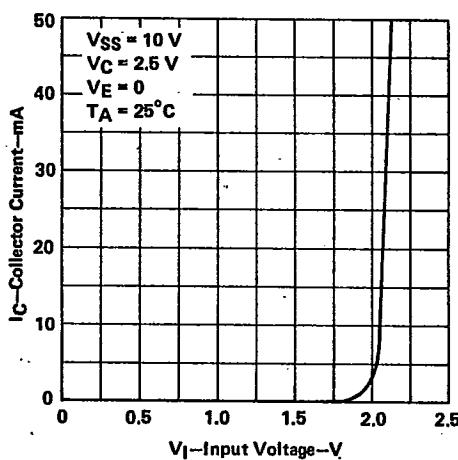
SN75491, SN75491A
COLLECTOR CURRENT
vs
INPUT VOLTAGE

FIGURE 4

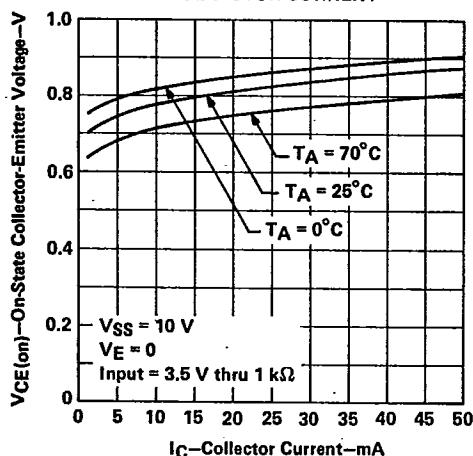
SN75491, SN75491A
ON-STATE COLLECTOR-EMITTER VOLTAGE
vs
COLLECTOR CURRENT

FIGURE 5

8961724 TEXAS INSTR (LIN/INTFC)

91D 75051 D

**SN75491, SN75491A, SN75492, SN75492A
MOS-TO-LED DRIVERS**

T-52-13-07

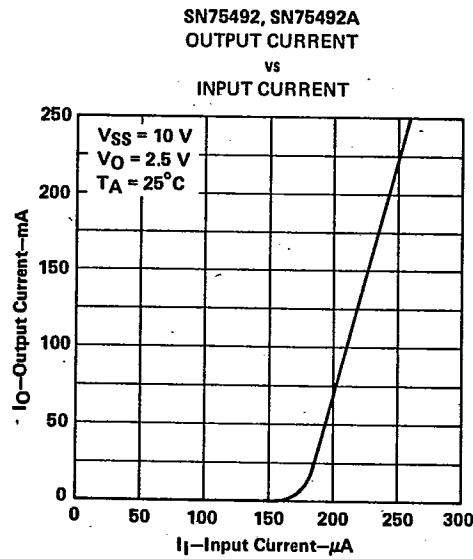
TYPICAL CHARACTERISTICS

FIGURE 6

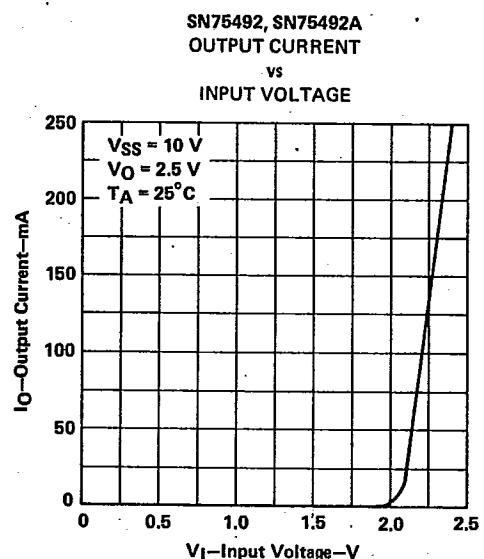


FIGURE 7

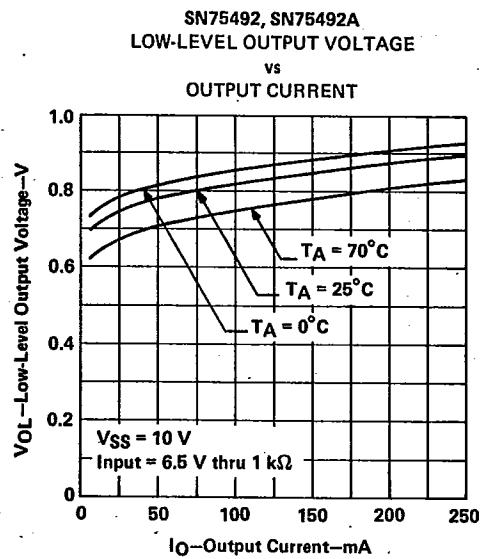


FIGURE 8

3

Display Drivers

**TEXAS
INSTRUMENTS**
POST OFFICE BOX 655012 • DALLAS, TEXAS 75266

8961724 TEXAS INSTR (LIN/INTFC)


91D 75052 D

**SN75491, SN75491A, SN75492, SN75492A
MOS-TO-LED DRIVERS**

T-52-13-07

TYPICAL APPLICATION DATA

Figure 9 is an example of time multiplexing the individual digits in a display to minimize circuitry. Up to twelve digits, each of which use a seven-segment display with decimal point, may be displayed using only two SN75491 and two SN75492 drivers.

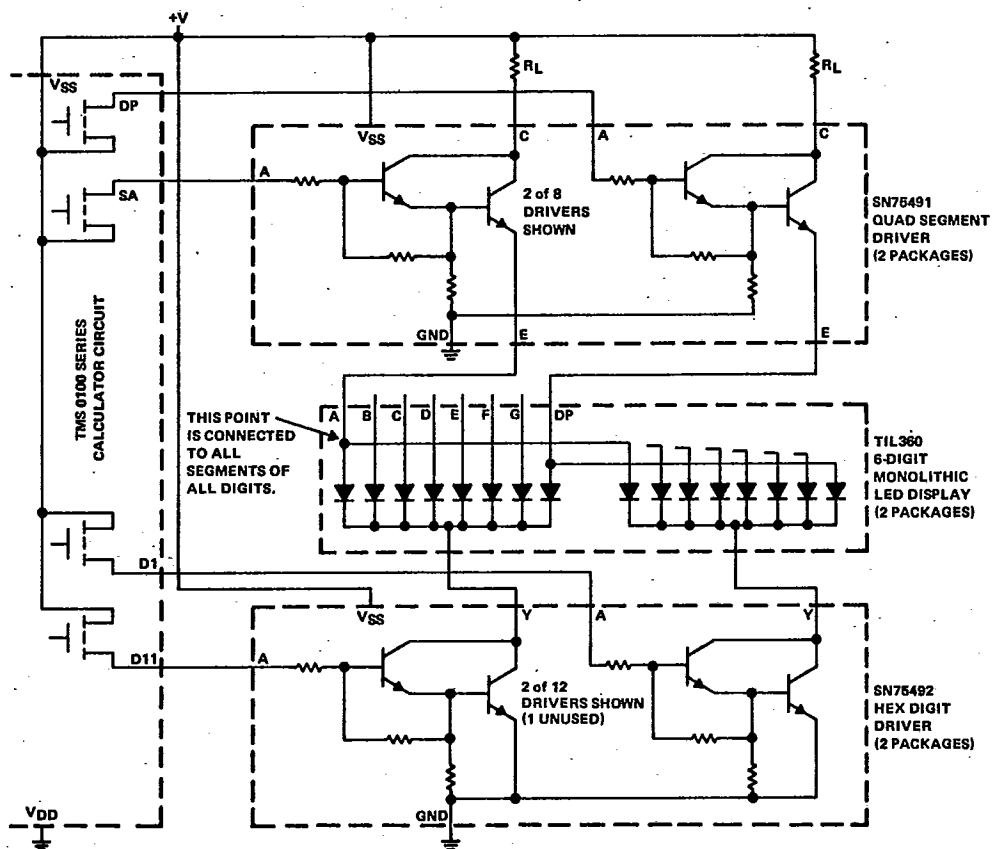Display Drivers**FIGURE 9. INTERFACING BETWEEN MOS CALCULATOR CIRCUIT
AND LED MULTI-DIGIT DISPLAY**

8961724 TEXAS INSTR (LIN/INTFC)

91D 75053 D

**SN75491, SN75491A, SN75492, SN75492A
MOS-TO-LED DRIVERS**

T-52-13-07

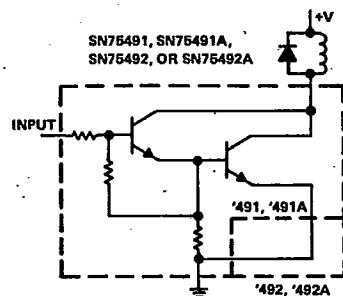
TYPICAL APPLICATION DATA

FIGURE 10. QUAD OR HEX RELAY DRIVER

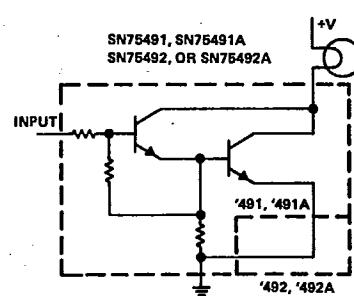


FIGURE 11. QUAD OR HEX LAMP DRIVER

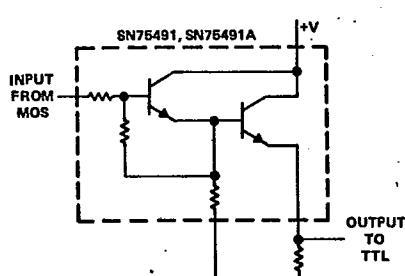
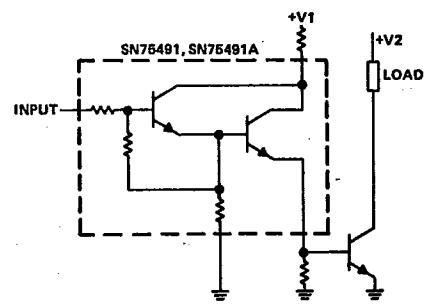
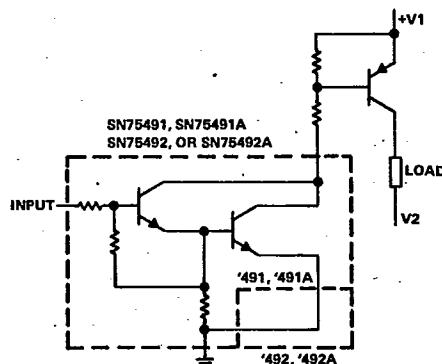
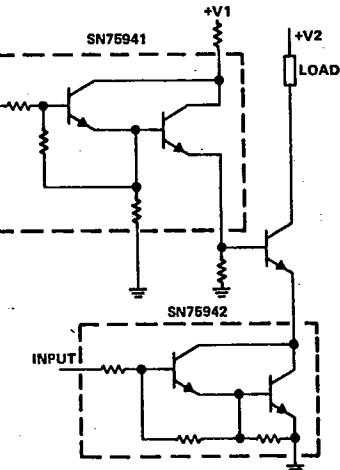


FIGURE 12. MOS-TO-TTL LEVEL SHIFTER

FIGURE 13. QUAD HIGH-CURRENT N-P-N
TRANSISTOR DRIVER

NOTE A: This circuit may be used as a digit driver for common-mode LED displays.

FIGURE 14. QUAD OR HEX HIGH-CURRENT
P-N-P TRANSISTOR DRIVERFIGURE 15. BASE/EMITTER SELECT N-P-N
TRANSISTOR DRIVER

Display Drivers

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

8961724 TEXAS INSTR (LIN/INTFC)

91D 75054 D

**SN75491, SN75491A, SN75492, SN75492A
MOS-TO-LED DRIVERS**

T-52-13-07

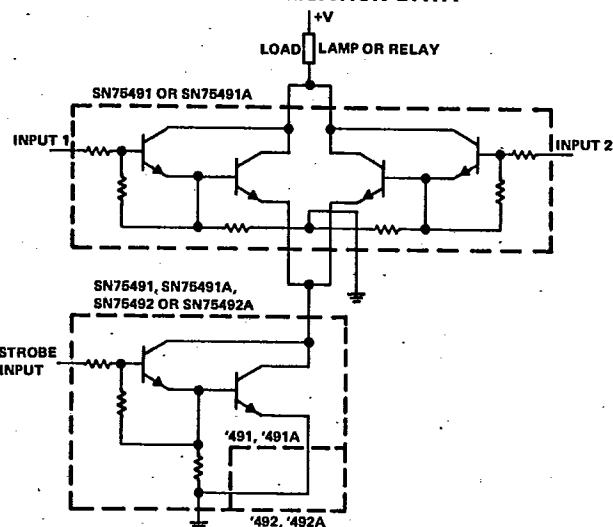
TYPICAL APPLICATION DATA

FIGURE 16. STROBED "NOR" DRIVER

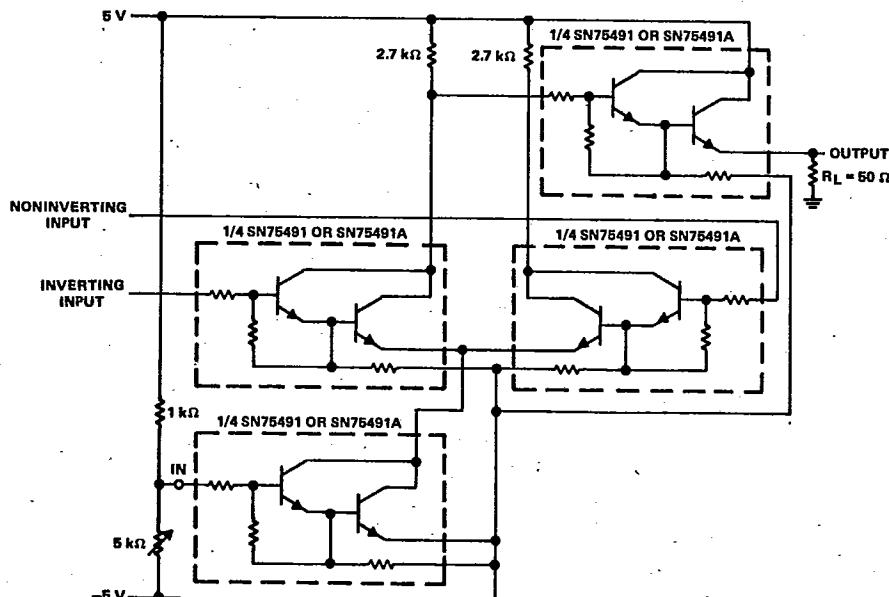
3 Display Drivers

FIGURE 17. SN75491/SN75491A USED AS AN INTERFACE CIRCUIT BETWEEN THE BALANCED 30-MHz OUTPUT OF AN RF AMPLIFIER AND A COAXIAL CABLE