

**Features**

- 1-channel signal conditioner
- 24 V DC supply (Power Rail)
- Input 2-wire and 3-wire transmitters and 2-wire current sources
- Output 0/4 mA ... 20 mA
- 2 relay contact outputs
- Programmable high/low alarm
- Linearization function (max 20 points)
- Line fault detection (LFD)
- Up to SIL2 acc. to IEC 61508/IEC 61511

**Function**

This signal conditioner provides the galvanic isolation between field circuits and control circuits.

The device supplies 2-wire and 3-wire transmitters, and can also be used with current sources.

Two relays and an active 0/4 mA ... 20 mA current source are available as outputs. The relay contacts and the current output can be integrated in security-relevant circuits. The current output is easily scaled.

On the display the measured value can be indicated in various physical units.


The device is easily configured by the use of keypad or with the PACTware configuration software.

The input has a line fault detection.

A fault is signaled by LEDs acc. to NAMUR NE44 and a separate collective error message output.


For additional information, refer to the manual and [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

**Assembly**

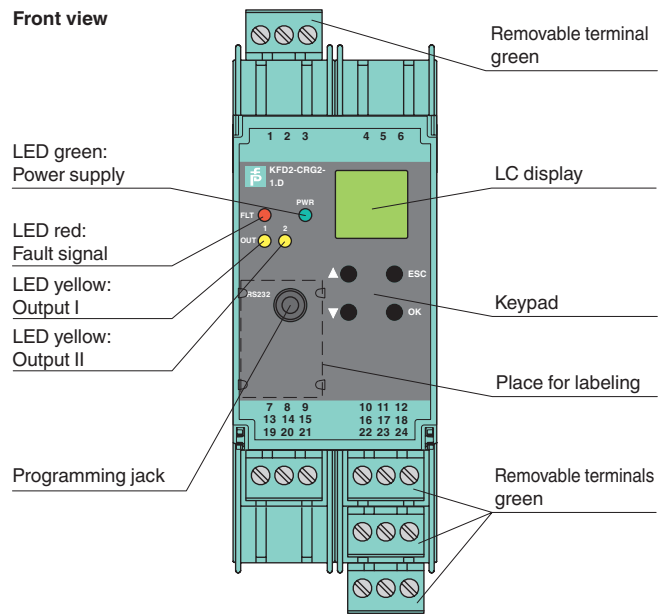

**SIL2**

**Connection**

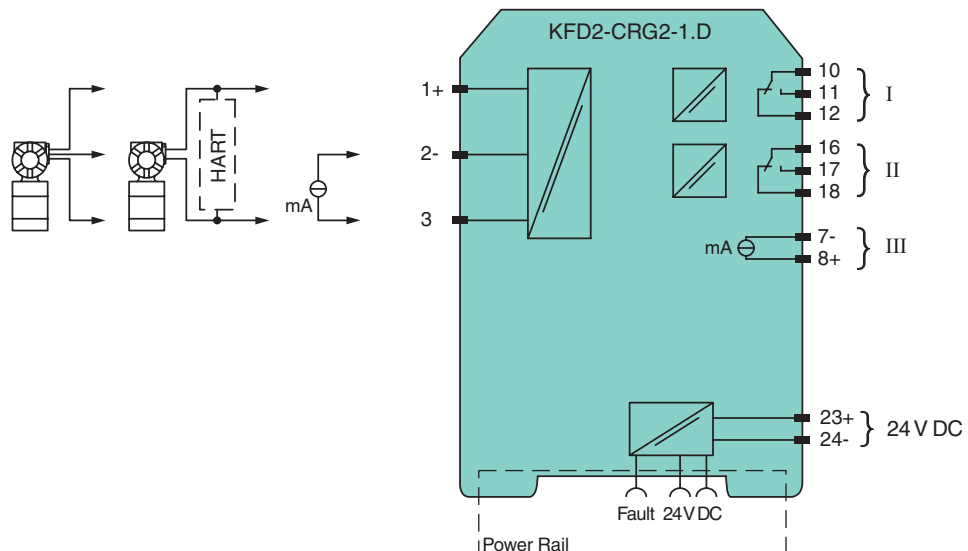

Release date 2014-04-30 14:09 Date of issue 2015-02-16 255621\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

<b>General specifications</b>		
Signal type		Analog input
<b>Supply</b>		
Connection		Power Rail or terminals 23+, 24-
Rated voltage	$U_n$	20 ... 30 V DC
Rated current	$I_n$	approx. 130 mA
Power loss		2 W
Power consumption		2.5 W
<b>Input</b>		
Connection		terminals 1, 2, 3
Input I		
Input signal		0/4 ... 20 mA
Available voltage		$\geq 15$ V at 20 mA
Open circuit voltage/short-circuit current		24 V / 33 mA
Input resistance		45 $\Omega$ (terminals 2, 3)
Lead monitoring		breakage I < 0.2 mA; short-circuit I > 22 mA
<b>Output</b>		
Connection		output I: terminals 10, 11, 12 output II: terminals 16, 17, 18 Output: analog terminals 8+, 7-
Output signal		0 ... 20 mA or 4 ... 20 mA
Output I, II		signal, relay
Contact loading		250 V AC / 2 A / $\cos \phi \geq 0.7$ ; 40 V DC / 2 A
Mechanical life		$5 \times 10^7$ switching cycles
Output III		
Current range		0 ... 20 mA or 4 ... 20 mA
Open loop voltage		$\leq 24$ V DC
Load		$\leq 650 \Omega$
Fault signal		downscale I $\leq 3.6$ mA, upscale I $\geq 21.5$ mA (acc. NAMUR NE43)
<b>Transfer characteristics</b>		
Input I		
Accuracy		< 30 $\mu$ A
Influence of ambient temperature		0.003 %/K (30 ppm)
Output I, II		
Response delay		$\leq 200$ ms at bounce from 0 ... 20 mA
Output III		
Resolution		$\leq 10 \mu$ A
Accuracy		< 20 $\mu$ A
Influence of ambient temperature		0.005 %/K (50 ppm)
Reaction time		< 650 ms at bounce from 0 ... 20 mA at the input, 90 % of output full-scale value
<b>Electrical isolation</b>		
Input/Other circuits		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output I, II/other circuits		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Mutual output I, II, III		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output III/power supply and collective error		functional insulation acc. to IEC 62103, rated insulation voltage 50 V <sub>eff</sub>
Interface/power supply and collective error		functional insulation acc. to IEC 62103, rated insulation voltage 50 V <sub>eff</sub>
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2004/108/EC		EN 61326-1:2006
Low voltage		
Directive 2006/95/EC		EN 61010-1:2010
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2006
Degree of protection		IEC 60529:2001
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Mass		300 g
Dimensions		40 x 119 x 115 mm (1.6 x 4.7 x 4.5 in) , housing type C3
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>General information</b>		

Release date 2014-04-30 14:09 Date of issue 2015-02-16 255621\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

## Supplementary information

Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

**Accessories****Power feed module KFD2-EB2**

The power feed module is used to supply the devices with 24 V DC via the Power Rail. The fuse-protected power feed module can supply up to 150 individual devices depending on the power consumption of the devices. A galvanically isolated mechanical contact uses the Power Rail to transmit collective error messages.

**Power Rail UPR-03**

The Power Rail UPR-03 is a complete unit consisting of the electrical inset and an aluminium profile rail 35 mm x 15 mm. To make electrical contact, the devices are simply engaged.

**Profile Rail K-DUCT with Power Rail**

The profile rail K-DUCT is an aluminum profile rail with Power Rail insert and two integral cable ducts for system and field cables. Due to this assembly no additional cable guides are necessary.



*Power Rail and Profile Rail must not be fed via the device terminals of the individual devices!*

**PACTware™**

Device-specific drivers (DTM)

**Adapter K-ADP-USB**

Programming adapter for parameterisation via the serial USB interface of a PC/Notebook