



EV6551-QB-00A

14V, 5A, H-Bridge Motor Driver Evaluation Board

DESCRIPTION

The EV6551-QB-00A is an evaluation board designed to demonstrate the capabilities of the MP6551, an H-bridge motor driver.

The MP6551 provides up to 5A of output current across a wide 2.5V to 14V input voltage range. Its input control signals are applied via a connector on the evaluation board (EN1, EN2, IN1, and IN2).

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Value	Units
Input voltage	V_{IN}	2.5 to 14	V
Maximum output current	I_{OUT_MAX}	5	A
Reference voltage	V_{REF}	3.3	V
3P3 voltage	V_{3P3}	3.3	V

FEATURES


- Wide 2.5V to 14V Input Supply Range
- Up to 5A Output Current (I_{OUT})
- Integrated Bidirectional Current-Sense Amplifiers
- Supports 100% Duty Cycle Operation
- Low-Power Sleep Mode
- Over-Current Protection (OCP)
- Over-Temperature Protection (OTP)
- Fault-Indicating Output

APPLICATIONS

- Mini Drones
- Battery-Powered Toys

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

EV6551-QB-00A EVALUATION BOARD

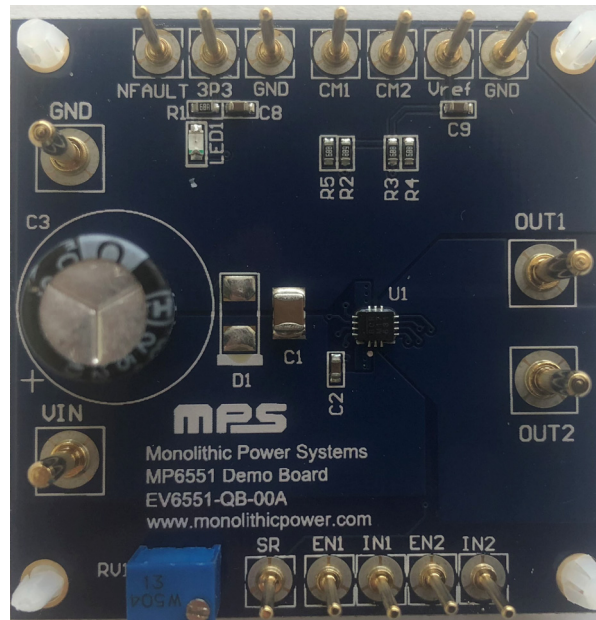

LxW (5.08cmx5.08cm)

Board Number	MPS IC Number
EV6551-QB-00A	MP6551GQB

QUICK START GUIDE

1. Preset the power supply between 2.5V and 14V, then turn off the power supply.
2. Connect the power supply terminals to:
 - a. Positive (+): VIN
 - b. Negative (-): GND
3. After making the connections, turn on the power supply.
4. Apply a 3.3V constant voltage to the 3P3 pin.
5. To set the current-sense reference voltage (V_{REF}), apply a 3.3V constant voltage to the VREF pin.
6. Connect the input control signals (generated by the external controller) to the ENx and INx pins.
7. Adjust the HS-FET turn-on/off speed via resistor RV1. The lower the resistance, the faster the HS-FET turn-on/off speed.

EV6551-QB-00A BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
1	R1	499Ω	Film resistor, 1%	0603	Yageo	RC0603FR-07499RL
4	R2, R3, R4, R5	4.99kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-074K99L
1	RV1	500kΩ	Square trimming potentiometer	DIP	Bourns	3266W-1-504LF
1	C1	10μF	Ceramic capacitor, 25V, X5R	1210	TDK	C3225X5R1E106K
3	C2, C8, C9	100nF	Ceramic capacitor, 25V, X8R	0603	Murata	GCM188R91E104KA37D
1	C3	470μF	Electrolytic capacitor, 25V	DIP	Jianghai	CD287-25V470
1	LED	Red	LED	0805	Bright LED	BL-HUE35A-AV-TRB
1	D1	NS				
1	U1	MP6551	14V, 5A, H-bridge motor driver	QFN-14 (2.5mmx3mm)	MPS	MP6551GQB
4	VIN, VIN_GND, OUT1, OUT2	2mm	Connector, Φ = 2mm needle	DIP	Any	
12	SR, EN1, IN1, EN2, IN2, NFAULT, 3P3, CM1, CM2, VREF, GND, GND	1mm	Connector, Φ = 1mm needle	DIP	Any	

PCB LAYOUT

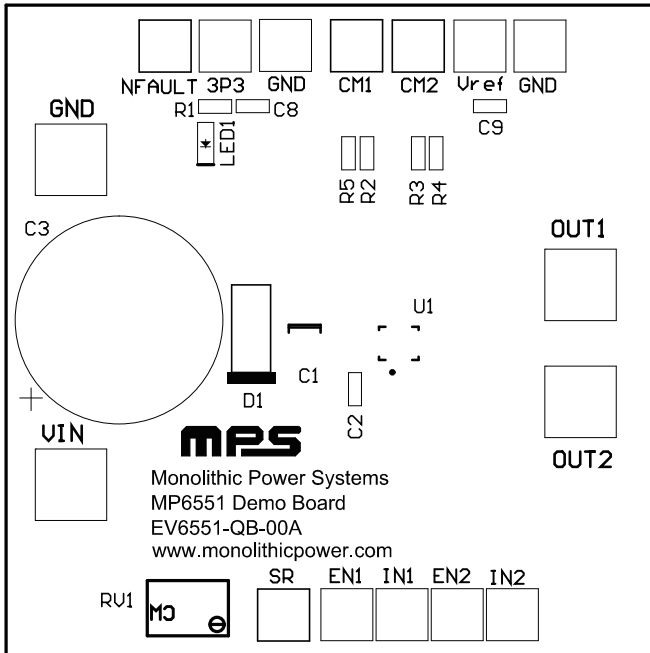


Figure 2: Top Silk

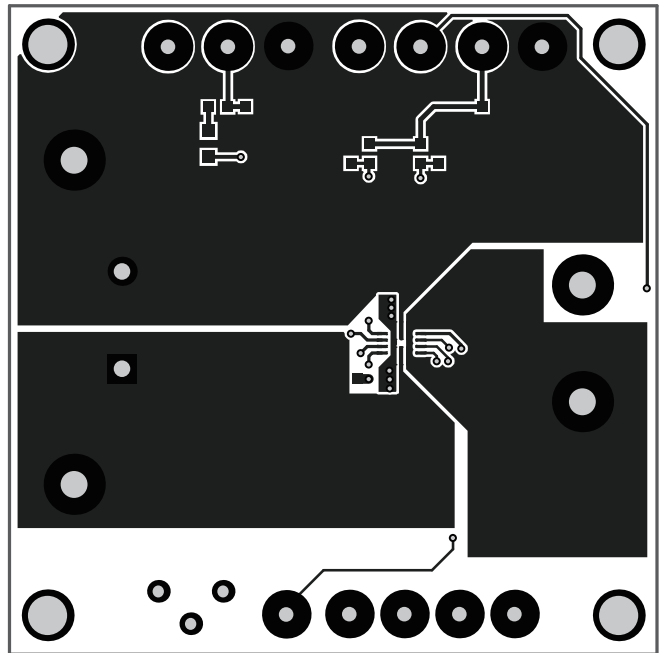


Figure 3: Top Layer

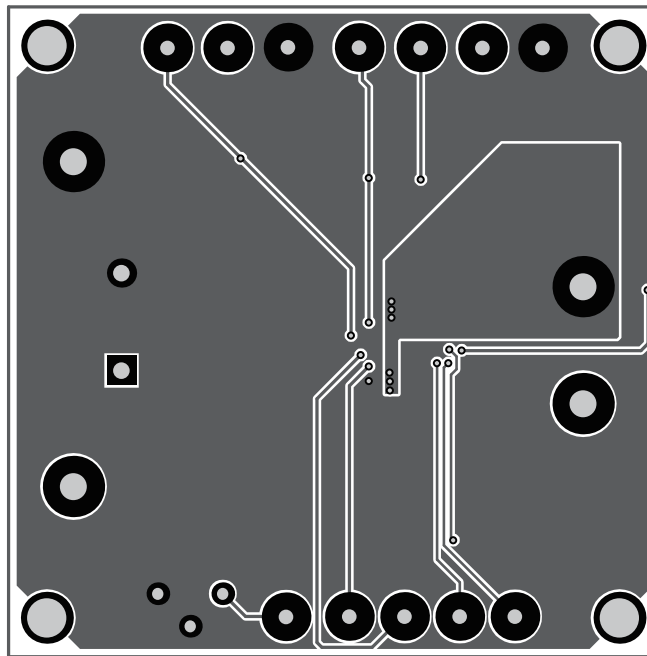


Figure 4: Bottom Layer



REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	3/9/2021	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.