


# Low Power Bipolar Transistor **multicomp**PRO

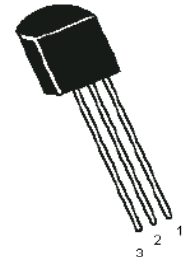

#### Pin Configuration:

1. Base
2. Collector
3. Emitter

#### Description:

- PNP silicon planar epitaxial transistors
- Driver stages of audio amplifier application

#### Absolute Maximum Ratings

Description	Symbol	BC640	Unit
Collector-Base Voltage	$V_{CBO}$	80	V
Collector-Emitter Voltage	$V_{CEO}$		
Emitter-Base Voltage	$V_{EBO}$		
Collector Current Continuous	$I_C$	1	A
Power Dissipation at $T_a = 25^\circ\text{C}$ Derate Above $25^\circ\text{C}$	$P_D$	800	mW
Power Dissipation at $T_C = 25^\circ\text{C}$ Derate Above $25^\circ\text{C}$		6.4	mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_j, T_{stg}$	-55 to +150	$^\circ\text{C}$

#### Thermal Resistance

From Junction to Case	$R_{th(j-c)}$	45	$^\circ\text{C/W}$
From Junction to Ambient	$R_{th(j-a)}$	156	

# Low Power Bipolar Transistor **multicomp**PRO

## Electrical Characteristics ( $T_a = 25^\circ\text{C}$ unless otherwise specified)


Description	Symbol	Test Condition	TBC635	Units
Collector-Emitter Voltage	$V_{CEO}^*$	$I_C = 10\text{mA}, I_B = 0$	>80	V
Collector-Base Voltage	$V_{CBO}$	$I_C = 100\mu\text{A}, I_E = 0$		
Emitter-Base Voltage	$V_{EBO}$	$I_E = 10\mu\text{A}, I_C = 0$		
Collector Cut off Current	$I_{CBO}$	$V_{CB} = 30\text{V}, I_E = 0$	<100	nA
		$T_a = 125^\circ\text{C}$ $V_{CB} = 30\text{V}, I_E = 0$	<10	$\mu\text{A}$
Base Emitter On Voltage	$V_{BE(on)}^*$	$I_C = 500\text{mA}, V_{CE} = 2\text{V}$	<1	V
Collector Emitter Saturation Voltage	$V_{CE(sat)}^*$	$I_C = 500\text{mA}, I_B = 50\text{mA}$	<0.5	
DC Current Gain	$h_{FE}^*$	$I_C = 5\text{mA}, V_{CE} = 2\text{V}$	>25	-
		$I_C = 150\text{mA}, V_{CE} = 2\text{V}$	40 - 160	
		Group-10	63 - 160	
		Group-16	100 - 250	
		$I_C = 500\text{mA}, V_{CE} = 2\text{V}$	>25	

## Dynamic Characteristics

Transistors Frequency	$f_T$	$I_C = 50\text{mA}, V_{CE} = 2\text{V},$ $f = 100\text{MHz}$	200 (Typical)	MHz
Output Capacitance	$C_{ob}$	$V_{CB} = 10\text{V}, f = 1\text{MHz}$	7 (Typical)	$\mu\text{F}$
Input Capacitance	$C_{ib}$	$V_{BE} = 0.5\text{V}, I_C = 0,$ $f = 1\text{MHz}$	50 (Typical)	

\*Pulse Test : Pulse Width = 300 $\mu\text{s}$ , Duty Cycle = 2%

# Low Power Bipolar Transistor **multicomp**PRO

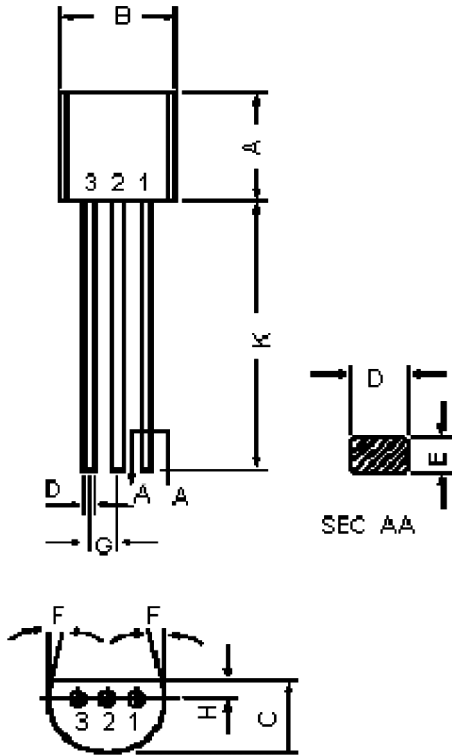

Dimensions	Min.	Max.
A	4.32	5.33
B	4.45	5.2
C	3.18	4.19
D	0.41	0.55
E	0.35	0.5
F	5°	
G	1.14	1.4
H		1.53
K	12.7	-

Dimensions : Millimetres

### Pin Configuration:

1. Base
2. Collector
3. Emitter

### Part Number Table

Description	Part Number
Transistor, PNP, TO-92	BC640

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 Element14.com/multicomp-pro

**multicomp**PRO