

PRO-ELEC



Model No. PEL00584

**MAINTAINED
LED DOUBLE SIDED WALL MOUNT EMERGENCY LIGHT**

Please read these instructions carefully before starting installation and retain for future reference. The centre page test record can be removed and kept with the building fire safety records.

IMPORTANT SAFETY INFORMATION

RISK OF ELECTRICAL SHOCK. ALWAYS ISOLATE THE POWER AT THE MAINS BEFORE INSTALLING OR MAINTAINING THIS EMERGENCY LIGHT.

- This product must be installed by a competent person in accordance with the Building Regulations and the current edition of the IET Wiring Regulations (BS7671).
- This product is suitable for mounting on normally flammable surfaces such as wood, plasterboard or masonry.
- Emergency light fittings should have their own separate mains circuit, protected with an appropriate MCB or fuse. They should not share their supply with other lighting or electrical equipment.
- This product is suitable for connection to a 220-240V~ 50Hz.
- This product is for indoor use only.
- Ensure that after installation the equipment remains accessible for regular maintenance and testing.

INSTALLATION

NOTE: Before drilling any holes, check that there are no hidden obstructions behind the mounting surface such as pipes or cables and that the wall will bear the weight safely.

1. Offer up the product in the location required and mark the fastening positions on the wall (234mm between centres).
2. Drill the wall and fit appropriate wall plugs (not supplied) in preparation for mounting the sign after the wiring connections have been made.
3. Prize off the rear cover carefully using a flat blade screwdriver and feed the wiring through the hole provided in the cover.
4. Make connection to the supply using the terminal block provided. Ensure that the correct polarities are observed i.e.:
 - Brown – Live terminal 'L'
 - Blue – Neutral terminal 'N'.
 - Link wire 'L' to 'SW' can be removed to change between maintained and non-maintained.
5. Write the current date on the battery pack in the space provided.
6. Connect the battery to the socket on the PCB marked 'BATTERY'.
7. Refit the rear cover, making sure that it is securely clipped in place.
8. Feed the wiring along the retention groove in the cover and locate the product on the wall and attach with suitable screws into the wall plugs installed earlier.
9. Turn on the power supply. The green LED should light to indicate that the battery is charging.
10. In maintained mode, the lamp will illuminate.
11. Perform the electrical tests specified in the Wiring Regulations (BS7671).

**Test Record Sheet on reverse
PULL OUT**

Installation, maintenance a

Location:

Installation date:

Installed by:


		20__		20__		2
Month	Test	Sign	Date	Sign	Date	S
1	Short					
2	Short					
3	Short					
4	Short					
5	Short					
6	1 hr					
7	Short					
8	Short					
9	Short					
10	Short					
11	Short					
12	3hr					

and operation check record

Installation test duration:

0__		20__		20__	
Sign	Date	Sign	Date	Sign	Date

**Test Record Sheet on reverse
PULL OUT**

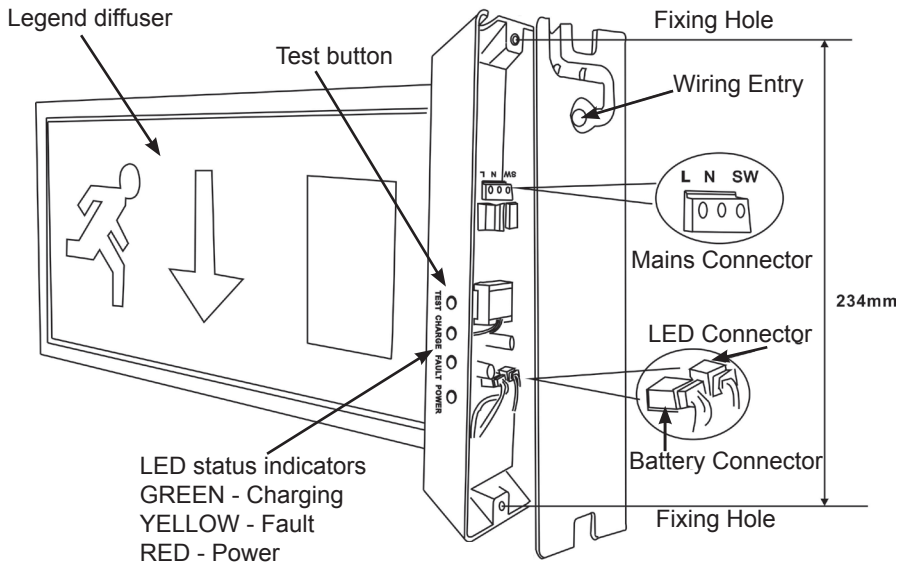

OPERATIONAL CHECKS

Note: This equipment must be checked regularly in compliance with local regulation and codes of practice.

- The LED's can be tested by pressing the TEST button on the bottom of the case. This simulates a power failure and the switches the lamp on to battery power.
- After installation, you should allow 24 hours for the battery pack to charge fully before testing.
- Isolate the power supply and check that the lamp remains illuminated for at least three hours. Restore the power supply.
- Each day: Check that the green charging LED is lit.
- Each month (short test): Isolate the power supply and check that the lamp remains illuminated. Record the results on the test record sheet included with these instructions.
- Every six months: Isolate the power supply and check that the lamp remains illuminated after 1 hour. Record the results on the included test record.
- Once each year: Isolate the power supply and check that the lamp is still illuminated after 3 hours. Record the results on the included test record.

Please keep these test records in a safe place. A fire officer or other authorised person may want to see your record of inspection and testing.

CLEANING AND MAINTENANCE

- Clean the product with a soft, dry cloth only. Do not use any solvents or abrasive chemical cleaners.
- The LED lamps in this product are non replaceable.

Changing the battery

- If after a routine operation check, the lamp does not remain lit for the 3 hour period, a new battery pack may be required. Change the battery pack as follows:
 1. Isolate from the mains supply.
 2. Remove the legend diffuser.
 3. Unplug the 2 pin white battery pack connector.
 4. Remove the old battery pack.
 5. Write the current date on the new battery pack.
 6. Fit the new battery pack and secure in position.
 7. Reconnect the battery pack terminal connector.
 8. Refit the diffuser making sure that it is securely clipped in place.
 9. Restore mains power and allow to charge for 24 hours.
 10. Perform the full operation check and update the test record.

Changing the fuse.

1. Isolate from the mains supply.
2. Remove the product from the wall, release the wiring from the retention slot and prize off the rear cover.
3. Remove the fuse from it's housing and replace with one of the same type (240V F3A).
4. Refit the rear panel feeding the wire into the retention slot.
5. Re-attach the product to the wall and test it's operation.

SPECIFICATIONS

Input voltage:	220-240V~, 50Hz
Rated power:	4.5W
Lamps:	SMD 3528 LEDs x 26 pcs
Luminous flux:	40Lm (AC/DC)
Continuous emergency illumination:	> 3 hours (when the battery is fully charged)
Battery pack:	Ni-Mh 3.6V 1.8Ah
Recharge time:	24 hours – approx.
Ambient temperature:	0 - 35°C
Over-discharge protection:	Yes
Ingress protection rating:	IP20



INFORMATION ON WASTE DISPOSAL FOR CONSUMERS OF ELECTRICAL & ELECTRONIC EQUIPMENT.

When this product has reached the end of its life it must be treated as Waste Electrical & Electronic Equipment (WEEE). Any WEEE marked products must not be mixed with general household waste, but kept separate for the treatment, recovery and recycling of the materials used. Waste batteries can be returned to any waste battery recycling point which are provided by most battery retailers. Contact your local authority for details of battery and recycling schemes in your area.



Made in China. PR2 9PP

Man Rev 1.0