

Buck-Boost click

PID: MIKROE-2806


High-efficiency buck-boost DC/DC converter

Buck-Boost click™ features [LTC3129-1](#), a buck-boost DC/DC conversion integrated circuit from Linear Technology®. The click supports a wide input voltage range and can output eight discrete regulated output voltage levels, selectable by the digital output voltage selection pins, ranging from 2.5V to 15V.

The main features of this converter are its very low noise and low ripple at the output, as well as very high regulating efficiency and low quiescent current. Those features make the Buck-Boost click a perfect solution for the regulators and post-regulators for harvested energy, solar panel post-regulators/chargers, rechargeable battery output voltage regulators, wireless low noise applications and similar.

How the click works

The active component of this click board™ is LTC3129-1, a buck-boost DC/DC conversion integrated circuit from Linear Technology®. The LTC3129-1 uses an ultra-low noise 1.2MHz PWM switching architecture, that minimizes the solution footprint by allowing for the low profile inductors and ceramic capacitors to be used.

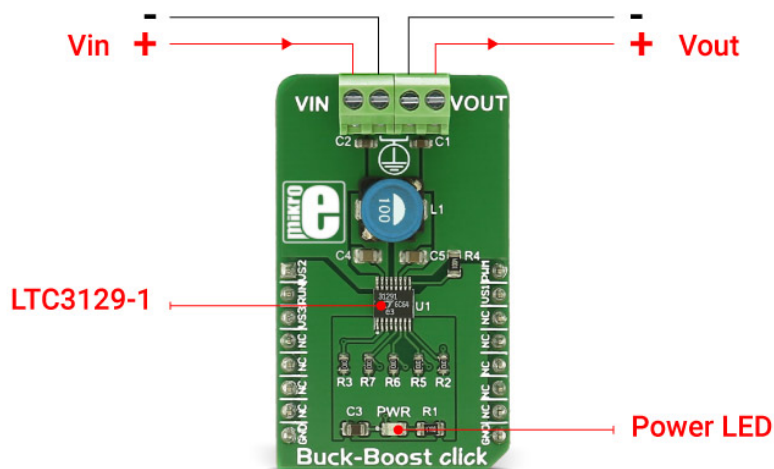

Buck-Boost click is able to work in two different modes of operation, depending on the nature of the application it is used in - PWM mode and Burst mode.

When the PWM mode is selected, LTC3129-1 operates in a fixed 1.2MHz PWM mode, using an internally compensated average current mode control loop. In PWM mode, ripple and the noise level of the output voltage are minimal. This mode can be selected by setting the PWM pin to logic high level (e.g. connected to VCC). The PWM mode is suitable for working with higher loads connected to the converter output and when the extremely low output noise is required.

For high-efficiency operation at light loads, automatic Burst Mode operation can be selected, reducing the quiescent current down to 1.3µA. Burst mode can be selected if the PWM pin is set to a logic low level (e.g. connected to GND). If the connected load is light enough, the converter will remain working in burst mode, running only when necessary to maintain voltage regulation. Otherwise, the PWM mode will be automatically engaged, providing enough current for the connected heavier load.

The Buck-boost click powers itself completely from the VIN terminal. Once the power is applied to the VIN terminal, the circuit also has to be enabled by setting the RUN pin to a high logic level. This will power up the converter, which will be indicated by the PWR LED.

The RUN pin function can be utilized to prolong the battery life - for example - the converter can be turned off, preventing draining of the LiPo battery below a certain voltage. Selection of the desired output voltage is done by setting the output voltage selection pins, as in the table below:

Voltage selection pins settings


VS3 / CS	VS2 / AN	VS1 / INT	VOUT
0	0	0	2.5V
0	0	1	3.3V
0	1	0	4.1V
0	1	1	5.0V
1	0	0	6.9V
1	0	1	8.2V
1	1	0	12V
1	1	1	15V

Specifications

Type	Boost,Buck
Applications	Regulators and post-regulators for harvested energy, solar panel post-regulators/chargers, rechargeable battery output voltage regulators, wireless low noise applications, etc.
On-board modules	LTC3129-1, a buck-boost DC/DC converter integrated circuit from Linear Technology
Key Features	Low noise and ripple on the output voltage, high efficiency, wide range of input voltages, selectable stabilized voltage values on the output
Interface	Analog,GPIO
Click board size	M (42.9 x 25.4 mm)

Pinout diagram

This table shows how the pinout on **Buck-Boost click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
Output voltage select pin	VS2	1	AN	PWM	16	PWM	Mode select pin
Enable pin	RUN	2	RST	INT	15	VS1	Output voltage select pin
Output voltage select pin	VS3	3	CS	RX	14	NC	
	NC	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	NC	
	NC	6	MOSI	SDA	11	NC	
	NC	7	3.3V	5V	10	NC	
Ground	GND	8	GND	GND	9	GND	Ground

Buck-Boost click electrical specifications

Description	Min	Typ	Max	Unit
Input voltage range (VIN)	1.92		15	V
Output voltage range (VOUT)	2.425		15.50	V
Inductor average current limit	80	200	350	mA

Onboard settings and indicators

Label	Name	Default	Description
PWR	Power LED	-	Power LED indicates that the click is powered on
TB1	VIN	-	Input voltage connector
TB2	VOUT	-	Output voltage connector