



The DNA of tech.™



## Release of updated datasheets and app notes VEML6030-family and VEML7700

For further information, please contact your regional Vishay office.

### CONTACT INFORMATION

#### Americas

Vishay Intertechnologies, Inc. Business Marketing The Americas - Opto  
25 Tampines Street 92

2585 Junction Avenue San Jose, California 95134-1923

California United States 95134-1923

Phone: +1-408-567-8358

Fax: +1-408-240-5687

-

#### Europe

VISHAY Semiconductor GmbH Business Marketing Europe - Opto  
Theresienstr. 2

-

Heilbronn Germany D-74025

Phone: +49-7131-7498-645

Fax: +49-7131-67-3144

-

#### Asia

VISHAY Intertechnology Asia Pte. Ltd. Business Marketing Asia/Japan  
25 Tampines Street 92, Keppel Building # 02-00,

-

Singapore Singapore 528877

Phone: +65 6780 7879

Fax: +65 6780 7897

-

**Description of Change:** Change log/short description for the datasheet:

No performance change of the part

Adjusted resolution

Adjusted spectral response ( ALS & white channel)

Renamed bits naming

Added ID register information

Declared configuration registers as R / W (read and write)

Detailed description of the implemented changes in the pdf-file attached

Change log/short description for the app note:

No performance change of the part

Adjusted resolution and maximum detectable illuminance as this was wrongly stated in the current appnote from 0.0036 lux/count and 120kLux to 0.0042 lux/count and 140 kLux, respectively

Adjusted spectral response ( ALS & white channel)

Added information about integration time tolerance

Renamed bits naming

Added ID – register information

Declared configuration bits as R / W

Added examples and optimized handling instructions concerning the correction formula

**Reason for Change:** Adjusted resolution as this was wrongly stated in the current datasheet

Adjusted spectral response ( ALS & white channel) as this was wrongly stated in the current datasheet

Renamed bits naming for readability purpose

Added ID – register information and Declared configuration registers as R / W (read and write) for customer convenience



The DNA of tech.™

# Product Information Notification



Product Group: OPT/Thu Jun 13, 2024/PIN-OPT-7462-2024-REV-1

**Expected Influence on Quality/Reliability/Performance:** No influence on quality, reliability and performance expected, nevertheless we request customer to prove in application if resolution is defined by the customer itself in the application or not. If resolution is defined in the particular application by the customer, no changes in the system should be made. In the case resolution was taken from the datasheet or app note, this has to be adjusted accordingly.

**Part Numbers/Series/Families Affected:** Please see materials list on the succeeding page.

**Vishay Brand(S):** Vishay Semiconductors

**Time Schedule:**

Start Shipment Date: Tue Jun 11, 2024

**Sample Availability:** Available from release

**Product Identification:** No special identification, NO CHANGE ON THE PRODUCT

**Qualification Data:** no qualification required, NO CHANGE ON THE PRODUCT

**Issued By:** Elena Poklonskaya, elena.poklonskaya@vishay.com



# Product Information Notification



Product Group: OPT/Thu Jun 13, 2024/PIN-OPT-7462-2024-REV-1

The DNA of tech.™

VEML6030	VEML6030-GS15	VEML6030IT	VEML6030IT-GS15	VEML6030X01
VEML6030X01-GS15	VEML6030RBX01	VEML6030RBX01-GS15	VEML6030LT	VEML6030LT-GS15
VEML7700-TT	VEML7700-TR			



The DNA of tech.™

# VEML6030 – Datasheet update

Change from Rev. 1.6, 28-Apr-2022 to Rev. 1.7, 28-Nov-2023



© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.

## Summary

- No performance change of the part
- Adjusted resolution as this was wrongly stated in the current datasheet
- Adjusted spectral response ( ALS & white channel)
- Renamed bits naming for readability purpose
- Added ID – register information
- Declared configuration registers as R / W (read and write)

© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.



The DNA of tech.™

Page1

Rev. 1.6, 28-Apr-2022

Rev 1.7, 28-Nov-2023

**AMBIENT LIGHT FUNCTION**

- Filtron™ technology adaption: close to real human eye response
- O-Trim™ technology adoption: ALS output tolerance  $\leq 10\%$
- 16-bit dynamic range for ambient light detection from 0 lx to about 120 klx with resolution down to 0.0036 lx/ct, supports low transmittance (dark) lens design
- 100 Hz and 120 Hz flicker noise rejection
- Excellent temperature compensation
- High dynamic detection resolution
- Software shutdown mode control

**AMBIENT LIGHT FUNCTION**

- 16-bit dynamic range for ambient light detection from 0 lx to about 140 klx with resolution down to 0.0042 lx/ct, supports low transmittance (dark) lens design
- 100 Hz and 120 Hz flicker noise rejection
- Excellent temperature compensation
- High dynamic detection resolution
- Software shutdown mode control

© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.

Page1

Rev. 1.6, 28-Apr-2022

Rev 1.7, 28-Nov-2023

PRODUCT SUMMARY						
PART NUMBER	OPERATING RANGE (mm)	OPERATING VOLTAGE RANGE (V)	I <sup>2</sup> C BUS VOLTAGE RANGE (V)	AMBIENT LIGHT RANGE (lx)	AMBIENT LIGHT RESOLUTION (lx)	OUTPUT CODE
VEML6030	n/a	2.5 to 3.6	1.7 to 3.6	0 to 120 000	0.0036	16 bit, I <sup>2</sup> C

PRODUCT SUMMARY						
PART NUMBER	OPERATING RANGE (mm)	OPERATING VOLTAGE RANGE (V)	I <sup>2</sup> C BUS VOLTAGE RANGE (V)	AMBIENT LIGHT RANGE (lx)	AMBIENT LIGHT RESOLUTION (lx)	OUTPUT CODE
VEML6030	n/a	2.5 to 3.6	1.7 to 3.6	0 to 140 000	0.0042	16 bit, I <sup>2</sup> C

© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.

ABSOLUTE MAXIMUM RATINGS (T <sub>amb</sub> = 25 °C, unless otherwise specified)					
PARAMETER	TEST CONDITION	SYMBOL	MIN.	MAX.	UNIT
Supply voltage		V <sub>DD</sub>	0	4	V
Operation temperature range		T <sub>amb</sub>	-25	+85	°C
Storage temperature range		T <sub>stg</sub>	-25	+85	°C
Total power dissipation	T <sub>amb</sub> ≤ 25 °C	P <sub>tot</sub>	-	50	mW
Junction temperature		T <sub>j</sub>	-	110	°C

BASIC CHARACTERISTICS (T <sub>amb</sub> = 25 °C, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply voltage		V <sub>DD</sub>	2.5	3.3	3.6	V
Shut down current <sup>(2)</sup>	V <sub>DD</sub> is 3.3 V	I <sub>sd</sub>	-	0.5	-	µA
Operation mode current <sup>(1)</sup>	V <sub>DD</sub> is 3.3 V, PSM = 11, refresh time 4100 ms	I <sub>DD</sub>	-	2	-	µA
	V <sub>DD</sub> is 3.3 V, PSM = 00, refresh time 600 ms	I <sub>DD</sub>	-	8	-	µA
	V <sub>DD</sub> is 3.3 V, PSM_EN = 0, refresh time 100 ms	I <sub>DD</sub>	-	45	-	µA
I <sup>2</sup> C clock rate range		f <sub>SCL</sub>	10	-	400	kHz
I <sup>2</sup> C bus input H-level range	V <sub>DD</sub> is 3.3 V	V <sub>ih</sub>	1.3	-	3.6	V
I <sup>2</sup> C bus input L-level range	V <sub>DD</sub> is 3.3 V	V <sub>il</sub>	-0.3	-	0.4	V
Digital current out (low, current sink)		I <sub>ol</sub>	3	-	-	mA
Digital resolution (LSB count)	with ALS_GAIN = "01"		-	0.0036	-	lx/step
Detectable minimum illuminance	with ALS_GAIN = "01"	E <sub>v min</sub>	-	0.0072	-	lx
Detectable maximum illuminance	with ALS_GAIN = "10"	E <sub>v max</sub>	-	120 000	-	lx
Dark offset <sup>(2)</sup>	with ALS_GAIN = "01"		-	3	-	step

Notes  
<sup>(1)</sup> Light source: white LED  
<sup>(2)</sup> Light conditions: dark

ABSOLUTE MAXIMUM RATINGS (T <sub>amb</sub> = 25 °C, unless otherwise specified)					
PARAMETER	TEST CONDITION	SYMBOL	MIN.	MAX.	UNIT
Supply voltage		V <sub>DD</sub>	0	4	V
Ambient temperature range		T <sub>amb</sub>	-25	+85	°C
Storage temperature range		T <sub>stg</sub>	-26	+85	°C
Total power dissipation	T <sub>amb</sub> ≤ 25 °C	P <sub>tot</sub>	-	50	mW
Junction temperature		T <sub>j</sub>	-	110	°C

BASIC CHARACTERISTICS (T <sub>amb</sub> = 25 °C, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply voltage		V <sub>DD</sub>	2.5	3.3	3.6	V
Shut down current <sup>(2)</sup>	V <sub>DD</sub> is 3.3 V	I <sub>sd</sub>	-	0.5	-	µA
Operation mode current <sup>(1)</sup>	V <sub>DD</sub> is 3.3 V, PSM = mode 4	I <sub>DD</sub>	-	2	-	µA
	V <sub>DD</sub> is 3.3 V, PSM = mode 1	I <sub>DD</sub>	-	8	-	µA
	V <sub>DD</sub> is 3.3 V, PSM_EN = disable	I <sub>DD</sub>	-	45	-	µA
I <sup>2</sup> C clock rate range		f <sub>SCL</sub>	10	-	400	kHz
I <sup>2</sup> C bus input H-level range	V <sub>DD</sub> is 3.3 V	V <sub>ih</sub>	1.3	-	3.6	V
I <sup>2</sup> C bus input L-level range	V <sub>DD</sub> is 3.3 V	V <sub>il</sub>	-0.3	-	0.4	V
Digital current out (low, current sink)		I <sub>ol</sub>	3	-	-	mA
Digital resolution (LSB count) <sup>(3)</sup>	with ALS_GAIN = x 2, ALS_IT = 800 ms		-	0.0042	-	lx/step
Detectable maximum illuminance <sup>(3)</sup>	with ALS_GAIN = x 1/8, ALS_IT = 25 ms	E <sub>v max</sub>	-	140 000	-	lx
Dark offset <sup>(2)</sup>	with ALS_GAIN = x 2, ALS_IT = 800/ms		-	3	-	step

CIRCUIT BLOCK DIAGRAM

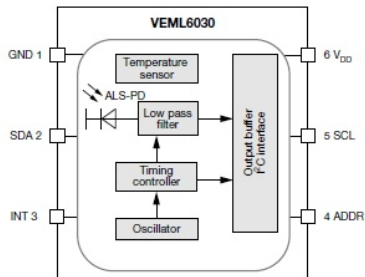


Fig. 1 - Block Diagram

CIRCUIT BLOCK DIAGRAM

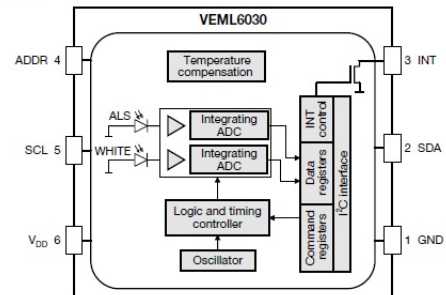


Fig. 1 - Block Diagram

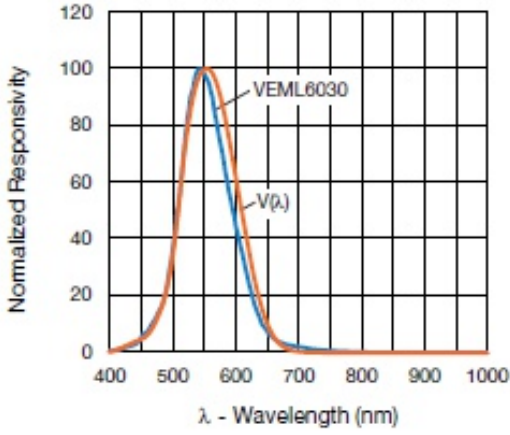


Fig. 5 - Spectral Response

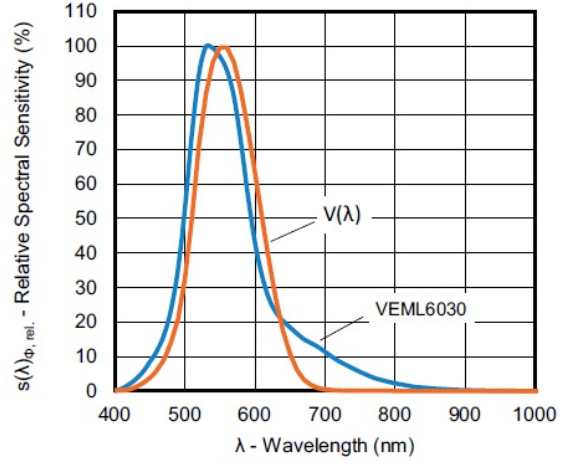


Fig. 5 - Spectral Response

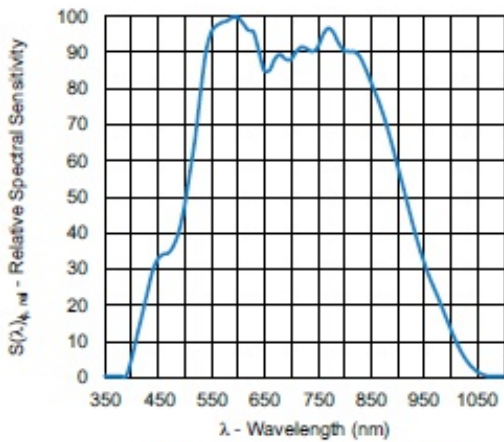


Fig. 6 - White Channel Responsivity

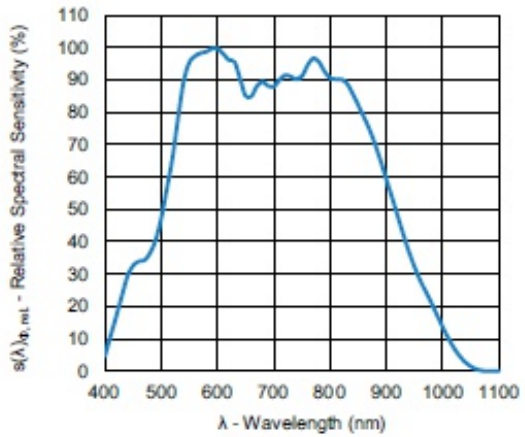


Fig. 6 - White Channel Responsivity

# Page5

Rev. 1.6, 28-Apr-2022

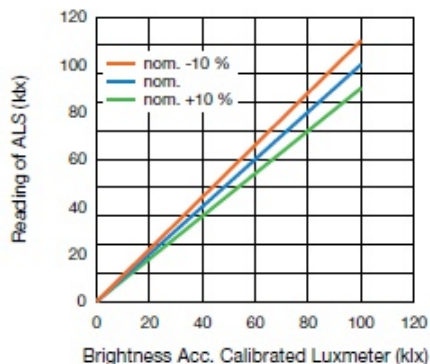


Fig. 8 - ALS measurement deviation between different light sources:  $\leq 10\%$

Rev 1.7, 28-Nov-2023

- Removed this figure.
- p2p tolerance discussion over different light sources is done in the application note and provides more detailed information, especially with regard to the non-linearity topic at higher illuminance level

# Page7

Rev. 1.6, 28-Apr-2022

COMMAND REGISTER FORMAT				
COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
00	ALS_CONF 0	15 : 0	ALS gain, integration time, interrupt, and shut down	W
01	ALS_WH	15 : 8	ALS high threshold window setting (MSB)	W
		7 : 0	ALS high threshold window setting (LSB)	W
02	ALS_WL	15 : 8	ALS low threshold window setting (MSB)	W
		7 : 0	ALS low threshold window setting (LSB)	W
03	Power saving	15 : 0	Set (15 : 3) 0000 0000 0000 00	R / W
04	ALS	15 : 8	MSB 8 bits data of whole ALS 16 bits	R
		7 : 0	LSB 8 bits data of whole ALS 16 bits	R
05	WHITE	15 : 8	MSB 8 bits data of whole WHITE 16 bits	R
		7 : 0	LSB 8 bits data of whole WHITE 16 bits	R
06	ALS_INT	15 : 0	ALS INT trigger event	R

Note  
• Command code 0 default value is 01 = devices is shut down

Rev 1.7, 28-Nov-2023

COMMAND REGISTER FORMAT				
COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
00	ALS_CONF 0	15 : 0	ALS gain, integration time, interrupt, and shut down	R / W
01	ALS_WH	15 : 8	ALS high threshold window setting (MSB)	R / W
		7 : 0	ALS high threshold window setting (LSB)	R / W
02	ALS_WL	15 : 8	ALS low threshold window setting (MSB)	R / W
		7 : 0	ALS low threshold window setting (LSB)	R / W
03	Power saving	15 : 0	Set (15 : 3) 0000 0000 0000 00	R / W
04	ALS	15 : 8	MSB 8 bits data of whole ALS 16 bits	R
		7 : 0	LSB 8 bits data of whole ALS 16 bits	R
05	WHITE	15 : 8	MSB 8 bits data of whole WHITE 16 bits	R
		7 : 0	LSB 8 bits data of whole WHITE 16 bits	R
06	ALS_INT	15 : 0	ALS INT trigger event	R
07	ID	15 : 0	Device ID	R



## Page7

Rev. 1.6, 28-Apr-2022

Rev 1.7, 28-Nov-2023

TABLE 1 - CONFIGURATION REGISTER #0

REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
Reserved	15 : 13	Set 000b	W
ALS_GAIN	12 : 11	Gain selection 00 = ALS gain x 1 01 = ALS gain x 2 10 = ALS gain x (1/8) 11 = ALS gain x (1/4)	W
reserved	10	Set 0b	W
ALS_IT	9 : 6	ALS integration time setting 1100 = 25 ms 1000 = 50 ms 0000 = 100 ms 0001 = 200 ms 0010 = 400 ms 0011 = 800 ms	W
ALS_PERS	5 : 4	ALS persistence protect number setting 00 = 1 01 = 2 10 = 4 11 = 8	W
Reserved	3 : 2	Set 00b	W
ALS_INT_EN	1	ALS interrupt enable setting 0 = ALS INT disable 1 = ALS INT enable	W
ALS_SD	0	ALS shut down setting 0 = ALS power on 1 = ALS shut down	W

TABLE 1 - CONFIGURATION REGISTER #0

REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
Reserved	15 : 13	Set 000b	R / W
ALS_GAIN	12 : 11	Gain selection 00 = ALS gain x 1 01 = ALS gain x 2 10 = ALS gain x (1/8) 11 = ALS gain x (1/4)	R / W
reserved	10	Set 0b	R / W
ALS_IT	9 : 6	ALS integration time setting 1100 = 25 ms 1000 = 50 ms 0000 = 100 ms 0001 = 200 ms 0010 = 400 ms 0011 = 800 ms	R / W
ALS_PERS	5 : 4	ALS persistence protect number setting 00 = 1 01 = 2 10 = 4 11 = 8	R / W
Reserved	3 : 2	Set 00b	R / W
ALS_INT_EN	1	ALS interrupt enable setting 0 = ALS INT disable 1 = ALS INT enable	R / W
ALS_SD	0	ALS shut down setting 0 = ALS power on 1 = ALS shut down	R / W

© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.

## Page8

Rev. 1.6, 28-Apr-2022

Rev 1.7, 28-Nov-2023

TABLE 4 - POWER SAVING MODES

COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
03	PSM	2 : 1	Power saving mode; see table "Refresh time" 00 = mode 1 01 = mode 2 10 = mode 3 11 = mode 4	W
	PSM_EN	0	Power saving mode enable setting 0 = disable 1 = enable	W

TABLE 4 - POWER SAVING MODES

COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
03	PSM	2 : 1	Power saving mode; see table "Refresh time" 00 = mode 1 01 = mode 2 10 = mode 3 11 = mode 4	R / W
	PSM_EN	0	Power saving mode enable setting 0 = disable 1 = enable	R / W

© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.

**Command Code #6: Interrupt Status**

Command code address = 06h. Bit 15 defines interrupt flag while trigger occurred due to data crossing low threshold windows. Bit 14 defines interrupt flag while trigger occurred due to data crossing high threshold windows.

TABLE 7 - INTERRUPT STATUS #6		
Bit 15	Bit 14	Bit 13 to 0
int_th_low	int_th_high	reserved
Description		
int_th_low	Read bit. Indicated a low threshold exceed	
int_th_high	Read bit. Indicated a high threshold exceed	

**REFRESH TIME DETERMINATION OF PSM**

VEML6030's refresh time can be determined by PSM and ALS.IT setting in power saving mode (PSM). Cooperating with the command register setting, the designer has a flexible method in defining the timing, power consumption, and sensitivity for light data collection.

**Command Code #6: Interrupt Status**

Command code address = 06h. Bit 15 defines interrupt flag while trigger occurred due to data crossing low threshold windows. Bit 14 defines interrupt flag while trigger occurred due to data crossing high threshold windows.

TABLE 7 - INTERRUPT STATUS #6		
Bit 15	Bit 14	Bit 13 to 0
int_th_low	int_th_high	reserved
Description		
int_th_low	Read bit. Indicated a low threshold exceed	
int_th_high	Read bit. Indicated a high threshold exceed	

**Command Code #7: ID Register**

Command code address = 07h. The low byte of the ID register contains the device specific ID code 81h. The high byte contains a code that depends on the chosen slave address option: either 0xC4 for a device with slave address 0x20, or 0xD4 for a device with slave address 0x30

TABLE 8 - DEVICE ID #7	
Bit 15 to 8	Bit 7 to 0
Slave address option code	Device ID code
Description	
Slave address option code	Slave address specific ID For slave address option 0x20: 11000100 = 0xC4 For slave address option 0x30: 11010100 = 0xD4
Device ID code	Fixed device ID: 10000001 = 0x81

**REFRESH TIME DETERMINATION OF PSM**

VEML6030's refresh time can be determined by PSM and ALS.IT setting in power saving mode (PSM). Cooperating with the command register setting, the designer has a flexible method in defining the timing, power consumption, and sensitivity for light data collection.

REFRESH TIME, I <sub>DD</sub> , AND RESOLUTION RELATION					
ALS GAIN	PSM	ALS IT	REFRESH TIME (ms)	I <sub>DD</sub> (µA)	RESOLUTION (lx/bit)
01	00	0000	600	8	0.0288
01	01	0000	1100	5	0.0288
01	10	0000	2100	3	0.0288
01	11	0000	4100	2	0.0288
01	00	0001	700	13	0.0144
01	01	0001	1200	8	0.0144
01	10	0001	2200	5	0.0144
01	11	0001	4200	3	0.0144
01	00	0010	900	20	0.0072
01	01	0010	1400	13	0.0072
01	10	0010	2400	8	0.0072
01	11	0010	4400	5	0.0072
01	00	0011	1300	28	0.0036
01	01	0011	1800	20	0.0036
01	10	0011	2800	13	0.0036
01	11	0011	4800	8	0.0036

REFRESH TIME, I <sub>DD</sub> , AND RESOLUTION RELATION					
ALS GAIN	PSM	ALS IT (ms)	REFRESH TIME (ms)	I <sub>DD</sub> (µA)	RESOLUTION (lx/bit)
x2	Mode 1	100	600	8	0.0336
x2	Mode 2	100	1100	5	0.0336
x2	Mode 3	100	2100	3	0.0336
x2	Mode 4	100	4100	2	0.0336
x2	Mode 1	200	700	13	0.0168
x2	Mode 2	200	1200	8	0.0168
x2	Mode 3	200	2200	5	0.0168
x2	Mode 4	200	4200	3	0.0168
x2	Mode 1	400	900	20	0.0084
x2	Mode 2	400	1400	13	0.0084
x2	Mode 3	400	2400	8	0.0084
x2	Mode 4	400	4400	5	0.0084
x2	Mode 1	800	1300	28	0.0042
x2	Mode 2	800	1800	20	0.0042
x2	Mode 3	800	2800	13	0.0042
x2	Mode 4	800	4800	8	0.0042





The DNA of tech.™

# VEML6030 – Application Note

Change from Rev. 20-Sep-2019 to Rev. 17-Jan-2024



© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.

## Summary

- No performance change of the part
- Adjusted resolution and maximum detectable illuminance as this was wrongly stated in the current appnote from 0.0036 lux/count and 120kLux to 0.0042 lux/count and 140 kLux, respectively
- Adjusted spectral response ( ALS & white channel)
- Added information about integration time tolerance
- Renamed bits naming for readability purpose
- Added ID – register information
- Declared configuration bits as R / W
- Added examples and optimized handling instructions concerning the correction formula

© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.



The DNA of tech.™

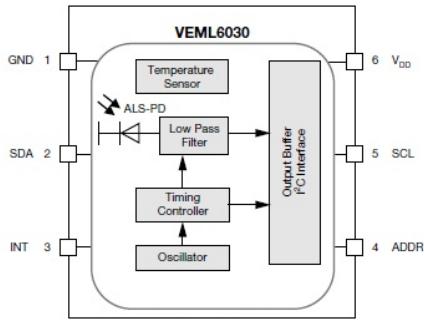


Fig. 1 - VEML6030 Block Diagram

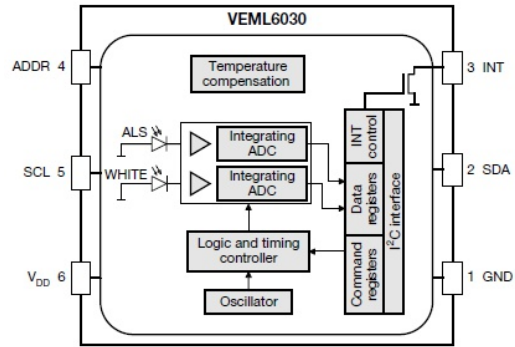


Fig. 1 - VEML6030 Block Diagram

COMMAND REGISTER FORMAT				
COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
00	ALS_CONF 0	15 : 0	ALS gain, integration time, interrupt, and shutdown	R/W
01	ALS_WH	15 : 8	ALS high threshold window setting (MSB)	R/W
		7 : 0	ALS high threshold window setting (LSB)	R/W
02	ALS_WL	15 : 8	ALS low threshold window setting (MSB)	R/W
		7 : 0	ALS low threshold window setting (LSB)	R/W
03	Power saving	15 : 0	Set (15 : 3) 0000 0000 0000 0b	R/W
04	ALS	15 : 8	MSB 8 bits data of whole ALS 16 bits	R
		7 : 0	LSB 8 bits data of whole ALS 16 bits	R
05	WHITE	15 : 8	MSB 8 bits data of whole WHITE 16 bits	R
		7 : 0	LSB 8 bits data of whole WHITE 16 bits	R
06	ALS_INT	15 : 0	ALS INT trigger event	R

COMMAND REGISTER FORMAT				
COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
00	ALS_CONF 0	15 : 0	ALS gain, integration time, interrupt, and shutdown	R / W
01	ALS_WH	15 : 8	ALS high threshold window setting (MSB)	R / W
		7 : 0	ALS high threshold window setting (LSB)	R / W
02	ALS_WL	15 : 8	ALS low threshold window setting (MSB)	R / W
		7 : 0	ALS low threshold window setting (LSB)	R / W
03	Power saving	15 : 0	Set (15 : 3) 0000 0000 0000 0b	R / W
04	ALS	15 : 8	MSB 8 bits data of whole ALS 16 bits	R
		7 : 0	LSB 8 bits data of whole ALS 16 bits	R
05	WHITE	15 : 8	MSB 8 bits data of whole WHITE 16 bits	R
		7 : 0	LSB 8 bits data of whole WHITE 16 bits	R
06	ALS_INT	15 : 0	ALS INT trigger event	R
07	ID	15 : 0	Device ID	R

# Page 4

Rev. 20-Sep-2019

Rev. 17-Jan-2024

Command Code ALS\_IT  
Command code: 00, bits 9 to 6

COMMAND REGISTER FORMAT			
REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
ALS_IT	9 : 6	ALS integration time setting 1100 = 25 ms 1000 = 50 ms 0000 = 100 ms 0001 = 200 ms 0010 = 400 ms 0011 = 800 ms	R/W

Remark: the standard integration time is 100 ms. If a very high resolution is needed, one may increase this integration time up to 800 ms. If faster measurement results are needed, it can be decreased down to 25 ms.

Command Code ALS\_IT  
Command code: 00, bits 9 to 6

COMMAND REGISTER FORMAT			
REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
ALS_IT	9 : 6	ALS integration time setting 1100 = 25 ms 1000 = 50 ms 0000 = 100 ms 0001 = 200 ms 0010 = 400 ms 0011 = 800 ms	R / W

Remark: the standard integration time is 100 ms. If a very high resolution is needed, one may increase this integration time up to 800 ms. If faster measurement results are needed, it can be decreased down to 25 ms. For the integration time a tolerance of ± 30 % can be assumed. This tolerance should also be considered during the read out of the measurement results.

# Page 5

Rev. 20-Sep-2019

Rev. 17-Jan-2024

RESOLUTION AND MAXIMUM DETECTION RANGE								
IT (ms)	TYPICAL RESOLUTION				MAXIMUM POSSIBLE ILLUMINATION			
	GAIN 2	GAIN 1	GAIN 1/4	GAIN 1/8	GAIN 2	GAIN 1	GAIN 1/4	GAIN 1/8
800	0.0036	0.0072	0.0288	0.0576	236	472	1887	3775
400	0.0072	0.0144	0.0576	0.1152	472	944	3775	7550
200	0.0144	0.0288	0.1152	0.2304	944	1887	7550	15 099
100	0.0288	0.0576	0.2304	0.4608	1887	3775	15 099	30 199
50	0.0576	0.1152	0.4608	0.9216	3775	7550	30 199	60 398
25	0.1152	0.2304	0.9216	1.8432	7550	15 099	60 398	120 796

Note  
• For illuminations > 1000 lx a correction formula needs to be applied. Please refer to the section "APPLICATION-DEPENDENT LUX CALCULATION" for further details on how this is done

Example:  
If the 16-bit word of the ALS data shows: 0000 0101 1100 1000 = 1480 (dec.), the programmed ALS gain is 1/4, and the integration time is 100 ms. The corresponding lux level is:  
light level [lx] = 1480 x 0.2304 = 341 lx

RESOLUTION AND MAXIMUM DETECTION RANGE								
IT (ms)	TYPICAL RESOLUTION (lx / cnt)				MAXIMUM POSSIBLE ILLUMINATION (lx)			
	GAIN 2	GAIN 1	GAIN 1/4	GAIN 1/8	GAIN 2	GAIN 1	GAIN 1/4	GAIN 1/8
800	0.0042	0.0084	0.0336	0.0672	275	550	2202	4404
400	0.0084	0.0168	0.0672	0.1344	550	1101	4404	8808
200	0.0168	0.0336	0.1344	0.2688	1101	2202	8808	17 616
100	0.0336	0.0672	0.2688	0.5376	2202	4404	17 616	35 232
50	0.0672	0.1344	0.5376	1.0752	4404	8808	35 232	70 463
25	0.1344	0.2688	1.0752	2.1504	8808	17 616	70 463	140 926

Note  
• For illuminations > 1000 lx a correction formula needs to be applied. Please refer to the section "APPLICATION-DEPENDENT LUX CALCULATION" for further details on how this is done

Example:  
If the 16-bit word of the ALS data shows: 0001 0101 1100 1101 = 5581 (dec.), the programmed ALS gain is 1/4, and the integration time is 100 ms. The corresponding lux level is:  
light level (uncorrected) = 5581 x 0.2688 = 1500 lx


Correcting the lux value with the help of the correction formula yields:  
 $a \times (1500 \text{ lux})^4 + b \times (1500 \text{ lux})^3 + c \times (1500 \text{ lux})^2 + d \times (1500 \text{ lux}) = 1658 \text{ lux}$   
 With the polynomial coefficients:  
 $a = 6.0135 \cdot 10^{-13}$   
 $b = -9.3924 \cdot 10^{-9}$   
 $c = 8.1488 \cdot 10^{-5}$   
 $d = 1.0023$

# Page 5

Rev. 20-Sep-2019

Rev. 17-Jan-2024



- Removed this figure because it was made with outdated sensitivity factors

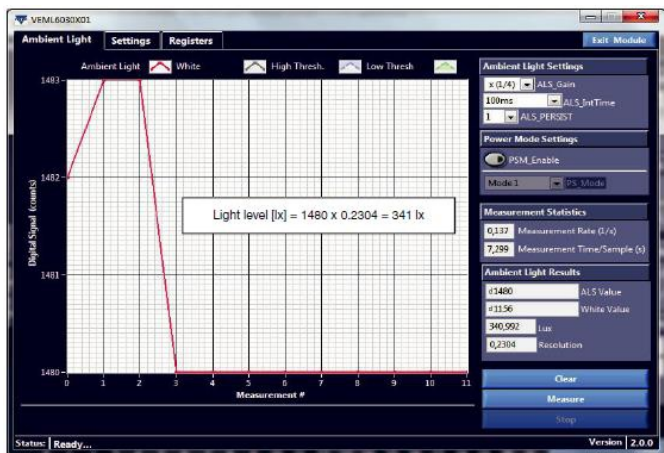

# Page 10 – corrected axis labels

Rev. 20-Sep-2019

Rev. 17-Jan-2024

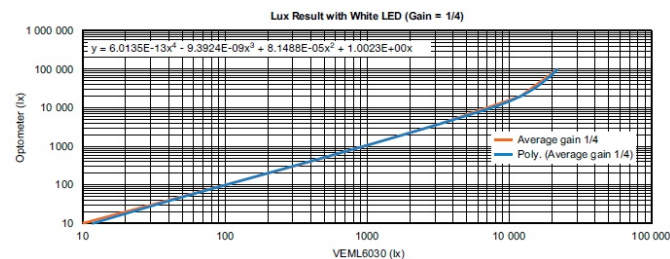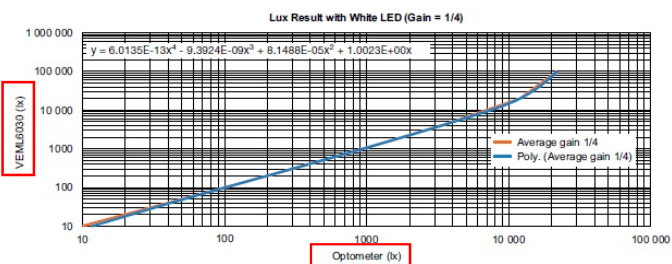

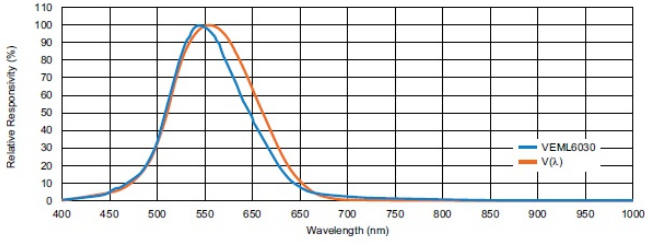


Fig. 12 - Spectral Response ALS Channel

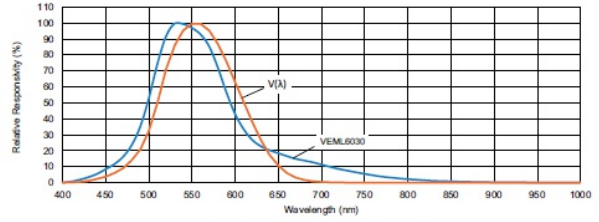


Fig. 11 - Spectral Response ALS Channel

REFRESH TIME, I <sub>DD</sub> , AND RESOLUTION RELATION					
ALS GAIN	PSM	ALS IT	REFRESH TIME (ms)	I <sub>DD</sub> (μA)	RESOLUTION (lx/bit)
01	00	0000	600	8	0.0288
01	01	0000	1100	5	0.0288
01	10	0000	2100	3	0.0288
01	11	0000	4100	2	0.0288
01	00	0001	700	13	0.0144
01	01	0001	1200	8	0.0144
01	10	0001	2200	5	0.0144
01	11	0001	4200	3	0.0144
01	00	0010	900	20	0.0072
01	01	0010	1400	13	0.0072
01	10	0010	2400	8	0.0072
01	11	0010	4400	5	0.0072
01	00	0011	1300	28	0.0036
01	01	0011	1800	20	0.0036
01	10	0011	2800	13	0.0036
01	11	0011	4800	8	0.0036

REFRESH TIME, I <sub>DD</sub> , AND RESOLUTION RELATION					
ALS GAIN	PSM	ALS IT (ms)	REFRESH TIME (ms)	I <sub>DD</sub> (μA)	RESOLUTION (lx/bit)
x2	Mode 1	100	600	8	0.0336
x2	Mode 2	100	1100	5	0.0336
x2	Mode 3	100	2100	3	0.0336
x2	Mode 4	100	4100	2	0.0336
x2	Mode 1	200	700	13	0.0168
x2	Mode 2	200	1200	8	0.0168
x2	Mode 3	200	2200	5	0.0168
x2	Mode 4	200	4200	3	0.0168
x2	Mode 1	400	900	20	0.0084
x2	Mode 2	400	1400	13	0.0084
x2	Mode 3	400	2400	8	0.0084
x2	Mode 4	400	4400	5	0.0084
x2	Mode 1	800	1300	28	0.0042
x2	Mode 2	800	1800	20	0.0042
x2	Mode 3	800	2800	13	0.0042
x2	Mode 4	800	4800	8	0.0042



The DNA of tech.™

# VEML7700 –Datasheet update

Change from Rev. 1.6 28-Apr-2022 to Rev 1.7 29-Nov-2023



© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.

## Summary

- No performance change of the part
- Adjusted resolution and maximum detectable illuminance as this was wrongly stated in the current datasheet
- Adjusted spectral response ( ALS & white channel)
- Renamed bits naming for readability purpose
- Added ID – register information
- Declared configuration bits as R / W

© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.



The DNA of tech.™



## Page1

Rev. 1.6 28-Apr-2022

Rev 1.7, 29-Nov-2023

**AMBIENT LIGHT FUNCTION**

- ~~Filteron™ technology adaption: close to real human eye response~~
- ~~Q-Trim™ technology adoption: ALS output tolerance  $\leq 10\%$~~
- 16-bit dynamic range for ambient light detection from 0 lx to about 120 klx with resolution down to 0.0042 lx/ct, supports low transmittance (dark) lens design
- 100 Hz and 120 Hz flicker noise rejection
- Excellent temperature compensation
- High dynamic detection resolution
- Software shutdown mode control

**AMBIENT LIGHT FUNCTION**

- 16-bit dynamic range for ambient light detection from 0 lx to about 140 klx with resolution down to 0.0042 lx/ct, supports low transmittance (dark) lens design
- 100 Hz and 120 Hz flicker noise rejection
- Excellent temperature compensation
- High dynamic detection resolution
- Software shutdown mode control

© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.

## Page1

Rev. 1.6 28-Apr-2022

Rev 1.7, 29-Nov-2023

PRODUCT SUMMARY							
PART NUMBER	OPERATING RANGE (mm)	OPERATING VOLTAGE RANGE (V)	I <sup>2</sup> C BUS VOLTAGE RANGE (V)	AMBIENT LIGHT RANGE (lx)	AMBIENT LIGHT RESOLUTION (lx)	OUTPUT CODE	ADC RESOLUTION PROXIMITY / AMBIENT LIGHT
VEML7700	n/a	2.5 to 3.6	1.7 to 3.6	0 to +20,000	±0.0042	16 bit, I <sup>2</sup> C	- / 0.0042

PRODUCT SUMMARY							
PART NUMBER	OPERATING VOLTAGE RANGE (V)	I <sup>2</sup> C BUS VOLTAGE RANGE (V)	AMBIENT LIGHT RANGE (lx)	AMBIENT LIGHT RESOLUTION (lx)	OUTPUT CODE	ADC RESOLUTION PROXIMITY / AMBIENT LIGHT	
VEML7700	2.5 to 3.6	1.7 to 3.6	0 to 140,000	0.0042	16 bit, I <sup>2</sup> C	- / 0.0042	

© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.

# Page 2

Rev. 1.6 28-Apr-2022

ABSOLUTE MAXIMUM RATINGS (T <sub>amb</sub> = 25 °C, unless otherwise specified)					
PARAMETER	TEST CONDITION	SYMBOL	MIN.	MAX.	UNIT
Supply voltage		V <sub>DD</sub>	0	4	V
Operation temperature range		T <sub>amb</sub>	-25	+85	°C
Storage temperature range		T <sub>stg</sub>	-25	+85	°C
Total power dissipation	T <sub>amb</sub> ≤ 25 °C	P <sub>tot</sub>	-	50	mW
Junction temperature		T <sub>j</sub>	-	110	°C

BASIC CHARACTERISTICS (T <sub>amb</sub> = 25 °C, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply voltage		V <sub>DD</sub>	2.5	3.3	3.6	V
Shut down current <sup>(1)</sup>	V <sub>DD</sub> is 3.3 V	I <sub>sd</sub>	-	0.5	-	µA
Operation mode current <sup>(1)</sup>	V <sub>DD</sub> is 3.3 V, PSM = 11, refresh time 4100 ms	I <sub>DD</sub>	-	2	-	µA
	V <sub>DD</sub> is 3.3 V, PSM = 00, refresh time 600 ms	I <sub>DD</sub>	-	8	-	µA
	V <sub>DD</sub> is 3.3 V, PSM_EN = 0, refresh time 100 ms	I <sub>DD</sub>	-	45	-	µA
PC clock rate range		f <sub>SCL</sub>	10	-	400	kHz
PC bus input H-level range	V <sub>DD</sub> is 3.3 V	V <sub>ih</sub>	1.3	-	3.6	V
PC bus input L-level range	V <sub>DD</sub> is 3.3 V	V <sub>il</sub>	-0.3	-	0.4	V
Digital current out (low, current sink)		I <sub>ol</sub>	3	-	-	mA
Digital resolution (LSB count)	with ALS_GAIN = "01"		-	0.0036	-	lx/step
Detectable minimum illuminance	with ALS_GAIN = "01"	E <sub>v min</sub>	-	0.0072	-	lx
Detectable maximum illuminance	with ALS_GAIN = "10"	E <sub>v max</sub>	-	120 000	-	lx
Dark offset <sup>(2)</sup>	with ALS_GAIN = "01"		-	3	-	step

Notes  
<sup>(1)</sup> Light source: white LED  
<sup>(2)</sup> Light conditions: dark

Rev 1.7, 29-Nov-2023

ABSOLUTE MAXIMUM RATINGS (T <sub>amb</sub> = 25 °C, unless otherwise specified)					
PARAMETER	TEST CONDITION	SYMBOL	MIN.	MAX.	UNIT
Supply voltage		V <sub>DD</sub>	0	4	V
Operation temperature range		T <sub>amb</sub>	-25	+65	°C
Storage temperature range		T <sub>stg</sub>	-25	+65	°C
Total power dissipation	T <sub>amb</sub> ≤ 25 °C	P <sub>tot</sub>	-	50	mW
Junction temperature		T <sub>j</sub>	-	100	°C

BASIC CHARACTERISTICS (T <sub>amb</sub> = 25 °C, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply voltage		V <sub>DD</sub>	2.5	3.3	3.6	V
Shut down current <sup>(1)</sup>	V <sub>DD</sub> is 3.3 V	I <sub>sd</sub>	-	0.5	-	µA
Operation mode current <sup>(1)</sup>	V <sub>DD</sub> is 3.3 V, PSM = 11, refresh time 4100 ms	I <sub>DD</sub>	-	2	-	µA
	V <sub>DD</sub> is 3.3 V, PSM = 00, refresh time 600 ms	I <sub>DD</sub>	-	8	-	µA
	V <sub>DD</sub> is 3.3 V, PSM_EN = 0, refresh time 100 ms	I <sub>DD</sub>	-	45	-	µA
PC clock rate range		f <sub>SCL</sub>	10	-	400	kHz
PC bus input H-level range	V <sub>DD</sub> is 3.3 V	V <sub>ih</sub>	1.3	-	3.6	V
PC bus input L-level range	V <sub>DD</sub> is 3.3 V	V <sub>il</sub>	-0.3	-	0.4	V
Digital current out (low, current sink)		I <sub>ol</sub>	3	-	-	mA
Digital resolution (LSB count) <sup>(1)</sup>	With ALS_GAIN = x 2, ALS_IT = 800 ms		-	0.0042	-	lx/step
Detectable maximum illuminance <sup>(2)</sup>	With ALS_GAIN = x 1/8, ALS_IT = 25 ms	E <sub>v max</sub>	-	140 000	-	lx
Dark offset <sup>(2)</sup>	With ALS_GAIN = x 2, ALS_IT = 800 ms		-	3	-	step

# Page 2

Rev. 1.6 28-Apr-2022

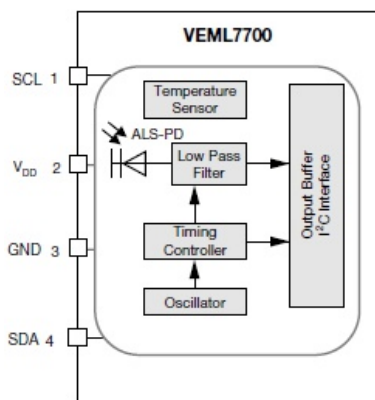


Fig. 1 - VEML7700 Block Diagram

Rev 1.7, 29-Nov-2023

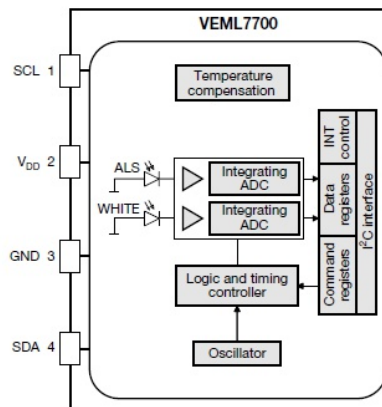


Fig. 1 - Block Diagram

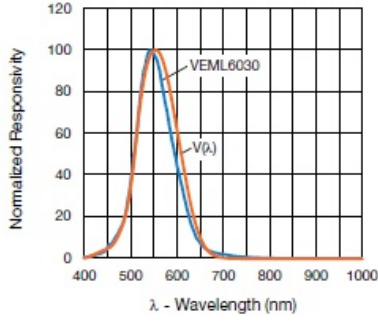


Fig. 5 - Spectral Response

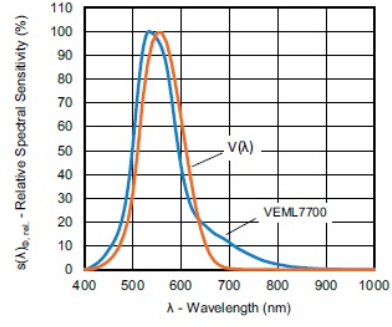


Fig. 5 - Spectral Response




Fig. 6 - White Channel Responsivity




Fig. 6 - White Channel Responsivity

# Page 5

Rev. 1.6 28-Apr-2022




Fig. 8 - ALS measurement deviation between different light sources:  $\leq 10\%$

Rev 1.7, 29-Nov-2023

- Removed this figure.
- p2p tolerance discussion over different light sources is done in the application note and provides more detailed information, especially with regard to the non-linearity topic at higher illuminance level

# Page 7

Rev. 1.6 28-Apr-2022

Rev 1.7, 29-Nov-2023

COMMAND REGISTER FORMAT				
COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
00	ALS_CONF 0	15 : 0	ALS gain, integration time, interrupt, and shut down	W
01	ALS_WH	15 : 8	ALS high threshold window setting (MSB)	W
		7 : 0	ALS high threshold window setting (LSB)	W
02	ALS_WL	15 : 8	ALS low threshold window setting (MSB)	W
		7 : 0	ALS low threshold window setting (LSB)	W
03	Power saving	15 : 0	Set (15 : 3) 0000 0000 0000 00	R / W
04	ALS	15 : 8	MSB 8 bits data of whole ALS 16 bits	R
		7 : 0	LSB 8 bits data of whole ALS 16 bits	R
05	WHITE	15 : 8	MSB 8 bits data of whole WHITE 16 bits	R
		7 : 0	LSB 8 bits data of whole WHITE 16 bits	R
06	ALS_INT	15 : 0	ALS INT trigger event	R

Note  
 • Command code 0 default value is 01 = devices is shut down

COMMAND REGISTER FORMAT				
COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
00	ALS_CONF 0	15 : 0	ALS gain, integration time, interrupt, and shutdown	R / W
01	ALS_WH	15 : 8	ALS high threshold window setting (MSB)	R / W
		7 : 0	ALS high threshold window setting (LSB)	R / W
02	ALS_WL	15 : 8	ALS low threshold window setting (MSB)	R / W
		7 : 0	ALS low threshold window setting (LSB)	R / W
03	Power saving	15 : 0	Set (15 : 3) 0000 0000 0000 00	R / W
04	ALS	15 : 8	MSB 8 bits data of whole ALS 16 bits	R
		7 : 0	LSB 8 bits data of whole ALS 16 bits	R
05	WHITE	15 : 8	MSB 8 bits data of whole WHITE 16 bits	R
		7 : 0	LSB 8 bits data of whole WHITE 16 bits	R
06	ALS_INT	15 : 0	ALS INT trigger event	R
07	ID	15 : 0	Device ID	R

# Page 7

Rev. 1.6 28-Apr-2022

Rev 1.7, 29-Nov-2023

REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
Reserved	15 : 13	Set 000b	W
ALS_GAIN	12 : 11	Gain selection 00 = ALS gain x 1 01 = ALS gain x 2 10 = ALS gain x (1/8) 11 = ALS gain x (1/4)	W
reserved	10	Set 0b	W
ALS_IT	9 : 6	ALS integration time setting 1100 = 25 ms 1000 = 50 ms 0000 = 100 ms 0001 = 200 ms 0010 = 400 ms 0011 = 800 ms	W
ALS_PERS	5 : 4	ALS persistence protect number setting 00 = 1 01 = 2 10 = 4 11 = 8	W
Reserved	3 : 2	Set 00b	W
ALS_INT_EN	1	ALS interrupt enable setting 0 = ALS INT disable 1 = ALS INT enable	W
ALS_SD	0	ALS shut down setting 0 = ALS power on 1 = ALS shut down	W

REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
Reserved	15 : 13	Set 000b	R / W
ALS_GAIN	12 : 11	Gain selection 00 = ALS gain x 1 01 = ALS gain x 2 10 = ALS gain x (1/8) 11 = ALS gain x (1/4)	R / W
reserved	10	Set 0b	R / W
ALS_IT	9 : 6	ALS integration time setting 1100 = 25 ms 1000 = 50 ms 0000 = 100 ms 0001 = 200 ms 0010 = 400 ms 0011 = 800 ms	R / W
ALS_PERS	5 : 4	ALS persistence protect number setting 00 = 1 01 = 2 10 = 4 11 = 8	R / W
Reserved	3 : 2	Set 00b	R / W
ALS_INT_EN	1	ALS interrupt enable setting 0 = ALS INT disable 1 = ALS INT enable	R / W
ALS_SD	0	ALS shut down setting 0 = ALS power on 1 = ALS shut down	R / W

# Page 8

Rev. 1.6 28-Apr-2022

Rev 1.7, 29-Nov-2023

COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
03	PSM	2 : 1	Power saving mode; see table "Refresh time" 00 = mode 1 01 = mode 2 10 = mode 3 11 = mode 4	W
	PSM_EN	0	Power saving mode enable setting 0 = disable 1 = enable	W

REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
PSM	2 : 1	Power saving mode; see table "Refresh time" 00 = mode 1 01 = mode 2 10 = mode 3 11 = mode 4	R / W
PSM_EN	0	Power saving mode enable setting 0 = disable 1 = enable	R / W

**Command Code #6: Interrupt Status**

Command code address = 06h. Bit 15 defines interrupt flag while trigger occurred due to data crossing low threshold windows. Bit 14 defines interrupt flag while trigger occurred due to data crossing high threshold windows.

TABLE 7 - INTERRUPT STATUS #6			
Bit 15		Bit 14	
int_th_low		int_th_high	
		Bit 13 to 0	
		reserved	
Description			
int_th_low		Read bit. Indicated a low threshold exceed	
int_th_high		Read bit. Indicated a high threshold exceed	

**REFRESH TIME DETERMINATION OF PSM**

VEML6030's refresh time can be determined by PSM and ALS.IT setting in power saving mode (PSM). Cooperating with the command register setting, the designer has a flexible method in defining the timing, power consumption, and sensitivity for light data collection.

**Command Code #6: Interrupt Status**

Command code address = 06h. Bit 15 defines interrupt flag while trigger occurred due to data crossing low threshold windows. Bit 14 defines interrupt flag while trigger occurred due to data crossing high threshold windows.

TABLE 7 - INTERRUPT STATUS #6			
Bit 15		Bit 14	
int_th_low		int_th_high	
		Bit 13 to 0	
		reserved	
Description			
int_th_low		Read bit. Indicated a low threshold exceed	
int_th_high		Read bit. Indicated a high threshold exceed	

**Command Code #7: ID Register**

Command code address = 07h. The low byte of the ID register contains the device specific ID code 81h. The high byte contains a code that depends on the chosen slave address option: either 0xC4 for a device with slave address 0x20, or 0xD4 for a device with slave address 0x30

TABLE 8 - DEVICE ID #7			
Bit 15 to 8		Bit 7 to 0	
Slave address option code		Device ID code	
Description			
Slave address option code		Slave address specific ID For slave address option 0x20: 11000100 = 0xC4 For slave address option 0x30: 11010100 = 0xD4	
Device ID code		Fixed device ID: 10000001 = 0x81	

**REFRESH TIME DETERMINATION OF PSM**

VEML6030's refresh time can be determined by PSM and ALS.IT setting in power saving mode (PSM). Cooperating with the command register setting, the designer has a flexible method in defining the timing, power consumption, and sensitivity for light data collection.

REFRESH TIME, I <sub>DD</sub> , AND RESOLUTION RELATION					
ALS_GAIN	PSM	ALS_IT	REFRESH TIME (ms)	I <sub>DD</sub> (µA)	RESOLUTION (lx/bit)
01	00	0000	600	8	0.0288
01	01	0000	1100	5	0.0288
01	10	0000	2100	3	0.0288
01	11	0000	4100	2	0.0288
01	00	0001	700	13	0.0144
01	01	0001	1200	8	0.0144
01	10	0001	2200	5	0.0144
01	11	0001	4200	3	0.0144
01	00	0010	900	20	0.0072
01	01	0010	1400	13	0.0072
01	10	0010	2400	8	0.0072
01	11	0010	4400	5	0.0072
01	00	0011	1300	28	0.0036
01	01	0011	1800	20	0.0036
01	10	0011	2800	13	0.0036
01	11	0011	4800	8	0.0036

REFRESH TIME, I <sub>DD</sub> , AND RESOLUTION RELATION					
ALS_GAIN	PSM	ALS_IT (ms)	REFRESH TIME (ms)	I <sub>DD</sub> (µA)	RESOLUTION (lx/bit)
x2	Mode 1	100	600	8	0.0336
x2	Mode 2	100	1100	5	0.0336
x2	Mode 3	100	2100	3	0.0336
x2	Mode 4	100	4100	2	0.0336
x2	Mode 1	200	700	13	0.0168
x2	Mode 2	200	1200	8	0.0168
x2	Mode 3	200	2200	5	0.0168
x2	Mode 4	200	4200	3	0.0168
x2	Mode 1	400	900	20	0.0084
x2	Mode 2	400	1400	13	0.0084
x2	Mode 3	400	2400	8	0.0084
x2	Mode 4	400	4400	5	0.0084
x2	Mode 1	800	1300	28	0.0042
x2	Mode 2	800	1800	20	0.0042
x2	Mode 3	800	2800	13	0.0042
x2	Mode 4	800	4800	8	0.0042



The DNA of tech.™

# VEML7700 – Application Note

Change from Rev. 20-Sep-2019 to Rev. 17-Jan-2024



© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.

## Summary

- No performance change of the part
- Adjusted resolution and maximum detectable illuminance as this was wrongly stated in the current appnote from 0.0036 lux/count and 120kLux to 0.0042 lux/count and 140 kLux, respectively
- Adjusted spectral response ( ALS & white channel)
- Added information about integration time tolerance
- Renamed bits naming for readability purpose
- Added ID – register information
- Declared configuration bits as R / W
- Added examples and optimized handling instructions concerning the correction formula

© VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED.



The DNA of tech.™

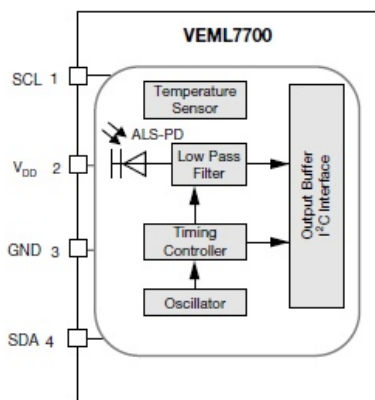


Fig. 1 - VEML7700 Block Diagram

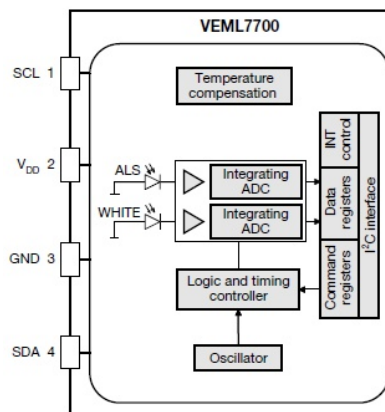


Fig. 1 - VEML7700 Block Diagram

COMMAND REGISTER FORMAT				
COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
00	ALS_CONF 0	15 : 0	ALS gain, integration time, interrupt, and shutdown	W
01	ALS_WH	15 : 8	ALS high threshold window setting (MSB)	W
		7 : 0	ALS high threshold window setting (LSB)	W
02	ALS_WL	15 : 8	ALS low threshold window setting (MSB)	W
		7 : 0	ALS low threshold window setting (LSB)	W
03	Power saving	15 : 0	Set (15 : 3) 0000 0000 0000 0b	R / W
04	ALS	15 : 8	MSB 8 bits data of whole ALS 16 bits	R
		7 : 0	LSB 8 bits data of whole ALS 16 bits	R
05	WHITE	15 : 8	MSB 8 bits data of whole WHITE 16 bits	R
		7 : 0	LSB 8 bits data of whole WHITE 16 bits	R
06	ALS_INT	15 : 0	ALS INT trigger event	R

COMMAND REGISTER FORMAT				
COMMAND CODE	REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
00	ALS_CONF 0	15 : 0	ALS gain, integration time, interrupt, and shutdown	R / W
01	ALS_WH	15 : 8	ALS high threshold window setting (MSB)	R / W
		7 : 0	ALS high threshold window setting (LSB)	R / W
02	ALS_WL	15 : 8	ALS low threshold window setting (MSB)	R / W
		7 : 0	ALS low threshold window setting (LSB)	R / W
03	Power saving	15 : 0	Set (15 : 3) 0000 0000 0000 0b	R / W
04	ALS	15 : 8	MSB 8 bits data of whole ALS 16 bits	R
		7 : 0	LSB 8 bits data of whole ALS 16 bits	R
05	WHITE	15 : 8	MSB 8 bits data of whole WHITE 16 bits	R
		7 : 0	LSB 8 bits data of whole WHITE 16 bits	R
06	ALS_INT	15 : 0	ALS INT trigger event	R
07	ID	15 : 0	Device ID	R



# Page 4

Rev. 20-Sep-2019

Rev. 17-Jan-2024

Command Code ALS\_IT  
Command code: 00, bits 9 to 6

COMMAND REGISTER FORMAT			
REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
ALS_IT	9 : 6	ALS integration time setting 1100 = 25 ms 1000 = 50 ms 0000 = 100 ms 0001 = 200 ms 0010 = 400 ms 0011 = 800 ms	R/W

Remark: the standard integration time is 100 ms. If a very high resolution is needed, one may increase this integration time up to 800 ms. If faster measurement results are needed, it can be decreased down to 25 ms.

Command Code ALS\_IT  
Command code: 00, bits 9 to 6

COMMAND REGISTER FORMAT			
REGISTER NAME	BIT	FUNCTION / DESCRIPTION	R / W
ALS_IT	9 : 6	ALS integration time setting 1100 = 25 ms 1000 = 50 ms 0000 = 100 ms 0001 = 200 ms 0010 = 400 ms 0011 = 800 ms	R / W

Remark: the standard integration time is 100 ms. If a very high resolution is needed, one may increase this integration time up to 800 ms. If faster measurement results are needed, it can be decreased down to 25 ms. For the integration time a tolerance of  $\pm 30\%$  can be assumed. This tolerance should also be considered during the read out of the measurement results.

# Page 5

Rev. 20-Sep-2019

Rev. 17-Jan-2024

RESOLUTION AND MAXIMUM DETECTION RANGE								
IT (ms)	GAIN 2	GAIN 1	GAIN 1/4	GAIN 1/8	MAXIMUM POSSIBLE ILLUMINATION			
	TYPICAL RESOLUTION				GAIN 2	GAIN 1	GAIN 1/4	GAIN 1/8
800	0.0036	0.0072	0.0288	0.0576	236	472	1887	3775
400	0.0072	0.0144	0.0576	0.1152	472	944	3775	7550
200	0.0144	0.0288	0.1152	0.2304	944	1887	7550	15 099
100	0.0288	0.0576	0.2304	0.4608	1887	3775	15 099	30 199
50	0.0576	0.1152	0.4608	0.9216	3775	7550	30 199	60 398
25	0.1152	0.2304	0.9216	1.8432	7550	15 099	60 398	120 796

Example:  
If the 16-bit word of the ALS data shows: 0000 0101 1100 1000 = 1480 (dec.), the programmed ALS gain is 1/4, and the integration time is 100 ms. The corresponding lux level is:  
light level [lx] = 1480 x 0.2304 = 341 lx

RESOLUTION AND MAXIMUM DETECTION RANGE								
IT (ms)	GAIN 2	GAIN 1	GAIN 1/4	GAIN 1/8	MAXIMUM POSSIBLE ILLUMINATION (lx / cnt)			
	TYPICAL RESOLUTION				GAIN 2	GAIN 1	GAIN 1/4	GAIN 1/8
800	0.0042	0.0084	0.0336	0.0672	275	550	2202	4404
400	0.0084	0.0168	0.0672	0.1344	550	1101	4404	8808
200	0.0168	0.0336	0.1344	0.2688	1101	2202	8808	17 616
100	0.0336	0.0672	0.2688	0.5376	2202	4404	17 616	35 232
50	0.0672	0.1344	0.5376	1.0752	4404	8808	35 232	70 463
25	0.1344	0.2688	1.0752	2.1504	8808	17 616	70 463	140 926

Note:  
• For illuminations > 1000 lx a correction formula needs to be applied. Please refer to the section "APPLICATION-DEPENDENT LUX CALCULATION" for further details on how this is done.

Example:  
If the 16-bit word of the ALS data shows: 0001 0101 1100 1101 = 5581 (dec.), the programmed ALS gain is 1/4, and the integration time is 100 ms. The corresponding lux level is:  
light level (uncorrected) = 5581 x 0.2688 = 1500 lx

Correcting the lux value with the help of the correction formula yields:  
 $a \times (1500 \text{ lux})^4 + b \times (1500 \text{ lux})^3 + c \times (1500 \text{ lux})^2 + d \times (1500 \text{ lux}) = 1658 \text{ lux}$   
 With the polynomial coefficients:  
 $a = 6.0135 \cdot 10^{-13}$   
 $b = -9.3924 \cdot 10^{-9}$   
 $c = 8.1488 \cdot 10^{-5}$   
 $d = 1.0023$

# Page 5

Rev. 20-Sep-2019




Rev. 17-Jan-2024


- Removed this figure because it was made with outdated sensitivity factors

# Page 10 – corrected axis labels

Rev. 20-Sep-2019

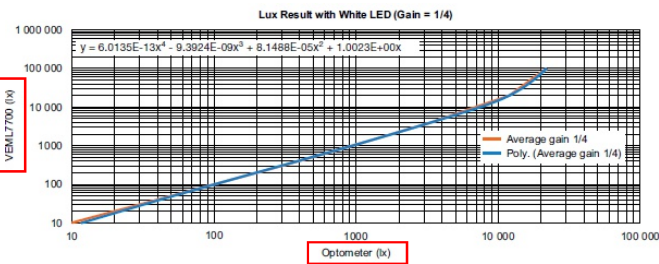

Rev. 17-Jan-2024

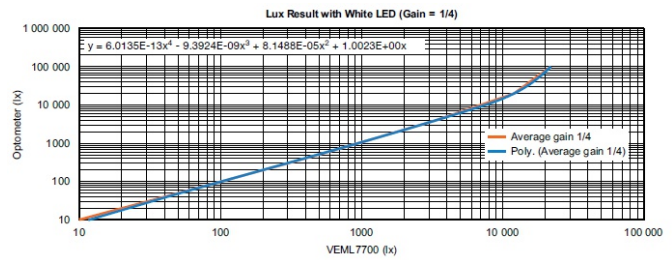

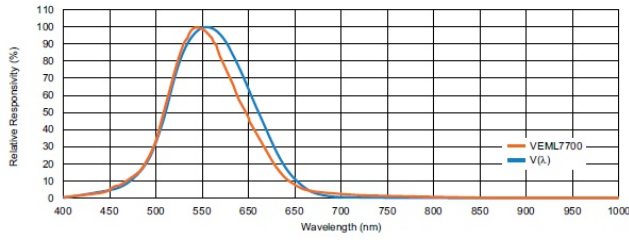


Fig. 12 - Spectral Response ALS Channel

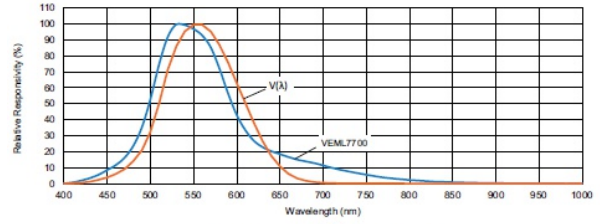


Fig. 11 - Spectral Response ALS Channel

REFRESH TIME, I <sub>DD</sub> , AND RESOLUTION RELATION					
ALS GAIN	PSM	ALS IT	REFRESH TIME (ms)	I <sub>DD</sub> (μA)	RESOLUTION (lx/bit)
01	00	0000	600	8	0.0288
01	01	0000	1100	5	0.0288
01	10	0000	2100	3	0.0288
01	11	0000	4100	2	0.0288
01	00	0001	700	13	0.0144
01	01	0001	1200	8	0.0144
01	10	0001	2200	5	0.0144
01	11	0001	4200	3	0.0144
01	00	0010	900	20	0.0072
01	01	0010	1400	13	0.0072
01	10	0010	2400	8	0.0072
01	11	0010	4400	5	0.0072
01	00	0011	1300	28	0.0036
01	01	0011	1800	20	0.0036
01	10	0011	2800	13	0.0036
01	11	0011	4800	8	0.0036

REFRESH TIME, I <sub>DD</sub> , AND RESOLUTION RELATION					
ALS GAIN	PSM	ALS IT (ms)	REFRESH TIME (ms)	I <sub>DD</sub> (μA)	RESOLUTION (lx/bit)
x2	Mode 1	100	600	8	0.0336
x2	Mode 2	100	1100	5	0.0336
x2	Mode 3	100	2100	3	0.0336
x2	Mode 4	100	4100	2	0.0336
x2	Mode 1	200	700	13	0.0168
x2	Mode 2	200	1200	8	0.0168
x2	Mode 3	200	2200	5	0.0168
x2	Mode 4	200	4200	3	0.0168
x2	Mode 1	400	900	20	0.0084
x2	Mode 2	400	1400	13	0.0084
x2	Mode 3	400	2400	8	0.0084
x2	Mode 4	400	4400	5	0.0084
x2	Mode 1	800	1300	28	0.0042
x2	Mode 2	800	1800	20	0.0042
x2	Mode 3	800	2800	13	0.0042
x2	Mode 4	800	4800	8	0.0042