



Thermistor motor prot. relay Standard evaluation unit
 22.5 mm enclosure Spring-type terminals 2 CO contacts
 hard gold-plated US = 24 V-240 V AC/DC
 Manual/Auto/Remote RESET with ATEX certification 2
 LEDs (READY/TRIPPED) Protective separation
 Test/Reset button Open-circuit monitoring Short-circuit
 monitoring Non-volatile

Figure similar

Article number		
Product brand name		SIRIUS
Product category		SIRIUS 3RN2 thermistor motor protection
Product designation		Thermistor motor protection relay
Product type designation		3RN2

General technical data

Display version LED		Yes
Power loss [W] for rated value of the current		
• at AC in hot operating state	W	1.7
• at DC in hot operating state	W	1.7
Insulation voltage		
• for overvoltage category III according to IEC 60664		
— with degree of pollution 3 rated value	V	300
Degree of pollution		3
Surge voltage resistance rated value	kV	6
maximum permissible voltage for safe isolation		
• between auxiliary and auxiliary circuit	V	300

<ul style="list-style-type: none"> • between control and auxiliary circuit 	V	300
Protection class IP		IP20
Shock resistance		
<ul style="list-style-type: none"> • acc. to IEC 60068-2-27 		11g / 15 ms
Vibration resistance		
<ul style="list-style-type: none"> • acc. to IEC 60068-2-6 		10 ... 55 Hz: 0.35 mm
Mechanical service life (switching cycles)		
<ul style="list-style-type: none"> • typical 		10 000 000
Electrical endurance (switching cycles)		
<ul style="list-style-type: none"> • at AC-15 at 230 V typical 		100 000
Thermal current of the switching element with contacts maximum	A	5
Equipment marking		
<ul style="list-style-type: none"> • acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 		K
<ul style="list-style-type: none"> • acc. to DIN EN 61346-2 		K
<ul style="list-style-type: none"> • acc. to DIN EN 81346-2 		K

Control circuit/ Control		
Type of voltage of the control supply voltage		AC/DC
Control supply voltage at AC		
<ul style="list-style-type: none"> • at 50 Hz rated value 	V	24 ... 240
<ul style="list-style-type: none"> • at 60 Hz rated value 	V	24 ... 240
Control supply voltage at DC		
<ul style="list-style-type: none"> • rated value 	V	24 ... 240
Operating range factor control supply voltage rated value at DC		
<ul style="list-style-type: none"> • initial value 		0.85
<ul style="list-style-type: none"> • Full-scale value 		1.1
Operating range factor control supply voltage rated value at AC at 50 Hz		
<ul style="list-style-type: none"> • initial value 		0.85
<ul style="list-style-type: none"> • Full-scale value 		1.1
Operating range factor control supply voltage rated value at AC at 60 Hz		
<ul style="list-style-type: none"> • initial value 		0.85
<ul style="list-style-type: none"> • Full-scale value 		1.1
Inrush current peak		
<ul style="list-style-type: none"> • at 24 V 	A	0.7
<ul style="list-style-type: none"> • at 240 V 	A	12
Duration of inrush current peak		
<ul style="list-style-type: none"> • at 24 V 	ms	0.25
<ul style="list-style-type: none"> • at 240 V 	ms	0.2

Measuring circuit		
Buffering time in the event of power failure minimum	ms	40
Precision		
Relative metering precision	%	2
Auxiliary circuit		
Material of switching contacts		AgSnO ₂ -HTV
Number of NC contacts		0
• for auxiliary contacts		
Number of NO contacts		0
• for auxiliary contacts		
Number of CO contacts		2
• for auxiliary contacts		
Operating current of auxiliary contacts at DC-13		
• at 24 V	A	1
• at 125 V	A	0.2
• at 250 V	A	0.1
Main circuit		
Operating frequency rated value	Hz	50 ... 60
Outputs		
Ampacity of the output relay at AC-15		
• at 250 V at 50/60 Hz	A	3
Ampacity of the output relay at DC-13		
• at 24 V	A	1
• at 125 V	A	0.2
Continuous current of the DIAZED fuse link of the output relay	A	6
Electromagnetic compatibility		
Conducted interference		
• due to burst acc. to IEC 61000-4-4		2 kV (power ports) / 1 kV (signal ports)
• due to conductor-earth surge acc. to IEC 61000-4-5		2 kV (line to ground)
• due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV (line to line)
Electrostatic discharge acc. to IEC 61000-4-2		6 kV contact discharge / 8 kV air discharge
Galvanic isolation		
Design of the electrical isolation		Protective separation
Galvanic isolation		
• between entrance and outlet		Yes
• between the outputs		Yes
• between the voltage supply and other circuits		Yes

Safety related data		
Safety Integrity Level (SIL) acc. to IEC 61508		1
Performance level (PL) acc. to EN ISO 13849-1		c
Category acc. to EN ISO 13849-1		1
Safe failure fraction (SFF)	%	74
Average diagnostic coverage level (DCavg)	%	18
Failure rate [FIT]		
<ul style="list-style-type: none"> at rate of recognizable hazardous failures (λ_{dd}) 	1/h	0.000000068
<ul style="list-style-type: none"> at rate of non-recognizable hazardous failures (λ_{du}) 	1/h	0.000000031
PFHD with high demand rate acc. to EN 62061	1/h	0.000000038
PFDavg with low demand rate acc. to IEC 61508		0.0041
MTTFd	y	303
Hardware fault tolerance acc. to IEC 61508		0
T1 value for proof test interval or service life acc. to IEC 61508	y	3

Connections/Terminals		
Product function		Yes
<ul style="list-style-type: none"> removable terminal for auxiliary and control circuit 		
Type of electrical connection		Push-in terminal
Type of connectable conductor cross-sections		
<ul style="list-style-type: none"> solid 		0.5 ... 4 mm ²
<ul style="list-style-type: none"> finely stranded with core end processing 		0.5 ... 2.5 mm ²
<ul style="list-style-type: none"> finely stranded without core end processing 		0.5 ... 4 mm ²
<ul style="list-style-type: none"> at AWG conductors solid 		20 ... 12
<ul style="list-style-type: none"> at AWG conductors stranded 		20 ... 12
Connectable conductor cross-section		
<ul style="list-style-type: none"> solid 	mm ²	0.5 ... 4
<ul style="list-style-type: none"> finely stranded with core end processing 	mm ²	0.5 ... 2.5
<ul style="list-style-type: none"> finely stranded without core end processing 	mm ²	0.5 ... 4
AWG number as coded connectable conductor cross section		
<ul style="list-style-type: none"> solid 		20 ... 12
<ul style="list-style-type: none"> stranded 		20 ... 12

Installation/ mounting/ dimensions		
Mounting position		any
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Height	mm	100
Width	mm	22.5
Depth	mm	90

Required spacing		
• with side-by-side mounting		
— forwards	mm	0
— Backwards	mm	0
— upwards	mm	0
— downwards	mm	0
— at the side	mm	0
• for grounded parts		
— forwards	mm	0
— Backwards	mm	0
— upwards	mm	0
— at the side	mm	0
— downwards	mm	0
• for live parts		
— forwards	mm	0
— Backwards	mm	0
— upwards	mm	0
— downwards	mm	0
— at the side	mm	0

Ambient conditions		
Installation altitude at height above sea level		
• maximum	m	2 000
Ambient temperature		
• during operation	°C	-25 ... +60
• during storage	°C	-40 ... +85
• during transport	°C	-40 ... +85
Relative humidity		
• during operation	%	70
Explosion protection category for dust		[Ex t] [Ex p]

Certificates/approvals

General Product Approval	EMC	For use in hazardous locations	Declaration of Conformity
--------------------------	-----	--------------------------------	---------------------------



Test Certificates	Marine / Shipping	other
-------------------	-------------------	-------

[Type Test Certificates/Test Report](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RN2013-2GW30>

Cax online generator





<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RN2013-2GW30>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RN2013-2GW30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RN2013-2GW30&lang=en

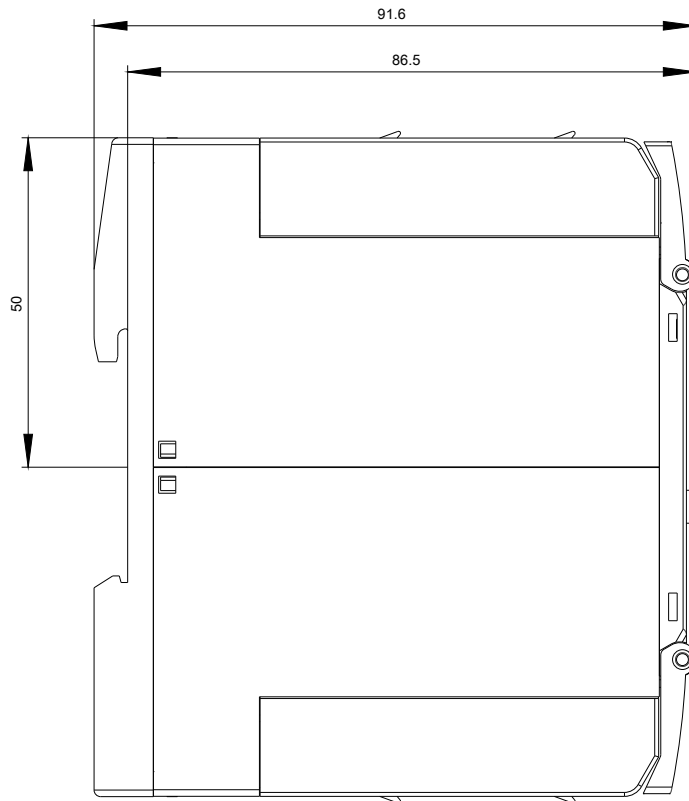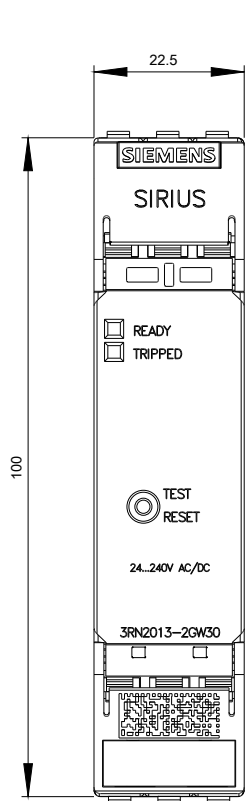

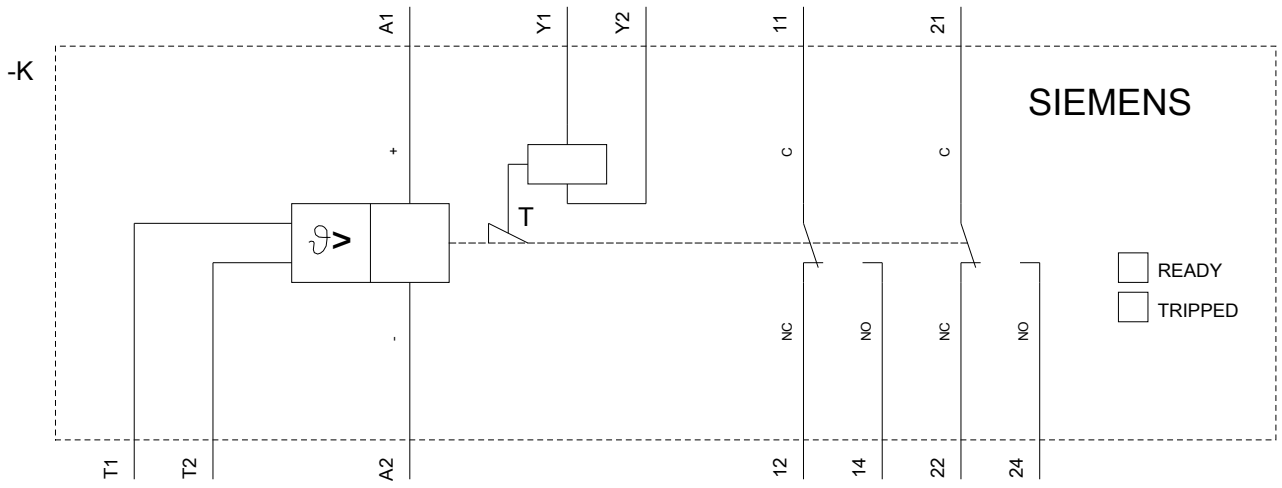

last modified:

09/25/2017