Suppression Chokes SU9V Series





Features

- · Common mode low current
- · A range of compact high inductance common mode chokes to provide excellent attenuation of RFI
- · Suitable for filtering of power supply rails and use in audio / communication equipment

Specifications

Voltage Rating : 250V AC / DC Frequency Range : 0.1 to 10MHz

Insulation Resistance : >100MΩ at 500V DC (between lines)

Operating Temperature : -25°C to +80°C Inductance measured at : 1kHz, 1V, KC530


Withstanding Voltage : 2,400V AC (2 seconds between lines)


Thermal Class : E (120°C)

Specification Table

Part Number	Current Rating (A)	Minimum Inductance (mH)	DC Resistance (Ω / Line)	Maximum Temperature Risk (K)
SU9V-01100	0.1	10	8	
SU9V-05020	0.5	2	1	40
SU9V-07010	0.7	1	0.6	40
SU9V-10005	1	0.5	0.3	

Diagram

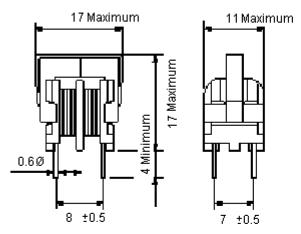




Dimensions: Millimetres


Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro




Suppression Chokes SU9V Series



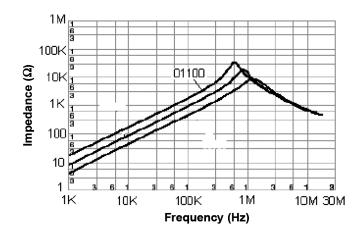

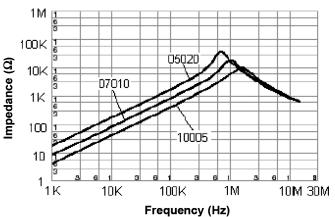

Part Number Explanation

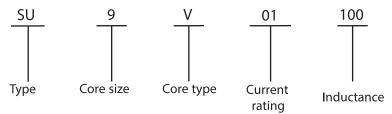

Core Type : V = Vertical type

Current Rating : 01 = 0.1A, 05 = 0.5A, 07 = 0.7A and 10 = 10AInductance : 100 = 10mH, 20 = 2mH, 10 = 1mH and 005 = 0.5mH

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

