Glass Passivated Bridge Rectifier





Features

- · Surge overload rating -175 amperes peak
- · Low forward voltage drop
- · Small size; simple installation
- · Sliver plated copper leads

Mechanical Data

Mounting Position : Any


Reverse Voltage : 200 to 600 Volts Forward Current : 8 Ampere


Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristics	Symbol	MP802G	MP806G	Unit
Max. Recurrent Peak Reverse Voltage	Vrrm	200	600	V
Max. RMS Bridge Input Voltage	VRMS	140	420	V
Max. Average Forward Rectified Output Current at @TA = 50°C	I(AV)	8		А
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load	İfsm	175		А
Max. Forward Voltage Drop Per Bridge Element at 3.0A Peak	VF	1.1		V
Max. Reverse Current at Rated $@T_J = 25^{\circ}C$ DC Blocking Voltage Per Element $@T_J = 100^{\circ}C$	lr	10 1		μA mA
Operating Temperature Range	TJ	-55 to +150		°C
Storage Temperature Range	Тѕтс			°C

Ratings and Characteristic Curves







Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro




Glass Passivated Bridge Rectifier







Dimensions:

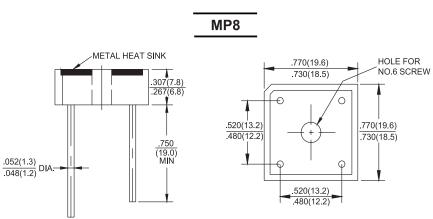

Dimensions: Inches (Millimetres)

Part Number Table

Description	Part Number	
Glass Passivated Bridge Rectifiers, 8A 600V	MP806G	
Glass Passivated Bridge Rectifiers, 8A 200V	MP802G	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

