



Auxiliary contact module, 1N/O+1N/C



Powering Business Worldwide™

Part no. DILM32-XHI11
Article no. 277376
Catalog No. XTCEXFDC11

Delivery programme


Product range
 Accessories
 Description
 Function
 Pole
 Connection technique
 Rated operational current
 AC-3
 Conventional free air thermal current, 3 pole, 50 - 60 Hz
 Open
 at 60 °C
 AC-15
 220 V 230 V 240 V
 380 V 400 V 415 V
 Contacts
 N/O = Normally open
 N/C = Normally closed
 Mounting type
 Contact sequence

$I_{th} = I_e$ A
 I_e A
 I_e A

Accessories
 Auxiliary contact modules with interlocked opposing contacts for standard applications
 2 pole
 Screw terminals

16
 4
 4

1 N/O
 1 N/C
 Front fixing



For use with

DILM(C)7-10...
 DILM(C)9-10...
 DILM(C)12-10...
 DILM(C)15-10...
 DILM(C)17-10...
 DILM(C)25-10...
 DILM(C)32-10...
 DILM38-10...
 DILMP20...
 DILMP32-10...
 DILMP45-10...
 DILL...
 Interlocked opposing contacts according to IEC/EN 60947-5-1 appendix L, inside the auxiliary contact modules, also for the integrated auxiliary contacts of the DILM 7 - DILM32
 Auxiliary contacts used as mirror contacts according to IEC/EN 60947-4-1 Appendix F (not N/C late open)

Instructions

Approvals

Product Standards
 UL File No.
 UL Category Control No.
 CSA File No.
 CSA Class No.
 North America Certification
 Specially designed for North America

IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking
 E29184
 NKCR
 012528
 3211-03
 UL listed, CSA certified
 No

Electrical specifications for standard auxiliary contacts

Interlocked opposing contacts within an auxiliary contact module (to IEC 60947-5-1 Annex L)
 N/C contact (not late-break contact) suitable as a mirror contact (to IEC/EN 60947-4-1 Annex F)
 Rated impulse withstand voltage

Overvoltage category/pollution degree

Rated insulation voltage


Rated operational voltage

Safe isolation to EN 61140

between coil and auxiliary contacts

between the auxiliary contacts

| | | |
|-----------|---------|----------------|
| | | Yes |
| | | DILM7 - DILM38 |
| U_{imp} | V AC | 6000 |
| | | III/3 |
| U_i | V AC | 690 |
| U_e | V AC | 500 |
| | V AC | 400 |
| | V AC | 400 |

| | | | |
|--|--------------|----------------|--|
| Rated operational current | | A | |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz | | | |
| Open | | | |
| at 60 °C | $I_{th}=I_e$ | A | 16 |
| AC-15 | | | |
| 220 V 230 V 240 V | I_e | A | 4 |
| 380 V 400 V 415 V | I_e | A | 4 |
| 500 V | I_e | A | 1.5 |
| DC current | | | |
| DC L/R  15 ms | | | |
| 24 V | I_e | A | 10 |
| 60 V | I_e | A | 6 |
| 110 V | I_e | A | 3 |
| 220 V | I_e | A | 1 |
| DC-13 (6xP) | | | |
| Contacts in series: | | A | |
| 3 | 24 V | A | 2.5 |
| 3 | 60 V | A | 1 |
| 3 | 110 V | A | 0.5 |
| 3 | 220 V | A | 0.25 |
| Control circuit reliability | Failure rate | λ | $<10^{-8}$, < one failure at 100 million operations (at $U_e = 24$ V DC, $U_{min} = 17$ V, $I_{min} = 5.4$ mA) |
| Component lifespan | | | |
| at $U_e = 230$ V, AC-15, 3 A | Operations | $x 10^6$ | 1.3 |
| Short-circuit rating without welding | | | |
| max. fuse | | A gG/ gL | 10 |


Technical data ETIM 5.0

Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block
(ecl@ss8-27-37-13-02 [AKN342009])

| | | |
|---|---|------------------|
| Number of contacts as change-over contact | | 0 |
| Number of contacts as normally open contact | | 1 |
| Number of contacts as normally closed contact | | 1 |
| Rated operation current I_e at AC-15, 230 V | A | 6 |
| Type of electric connection | | Screw connection |
| Mounting method | | Front fastening |

Dimensions

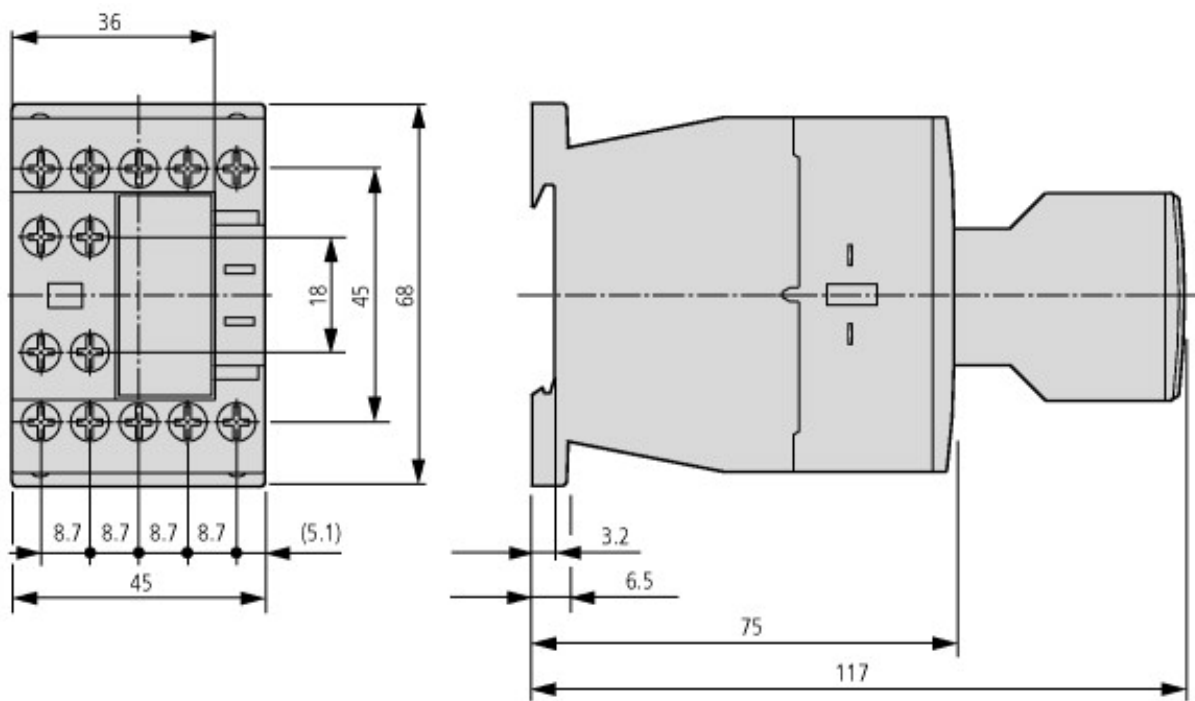

Contacteur avec module de contact auxiliaire

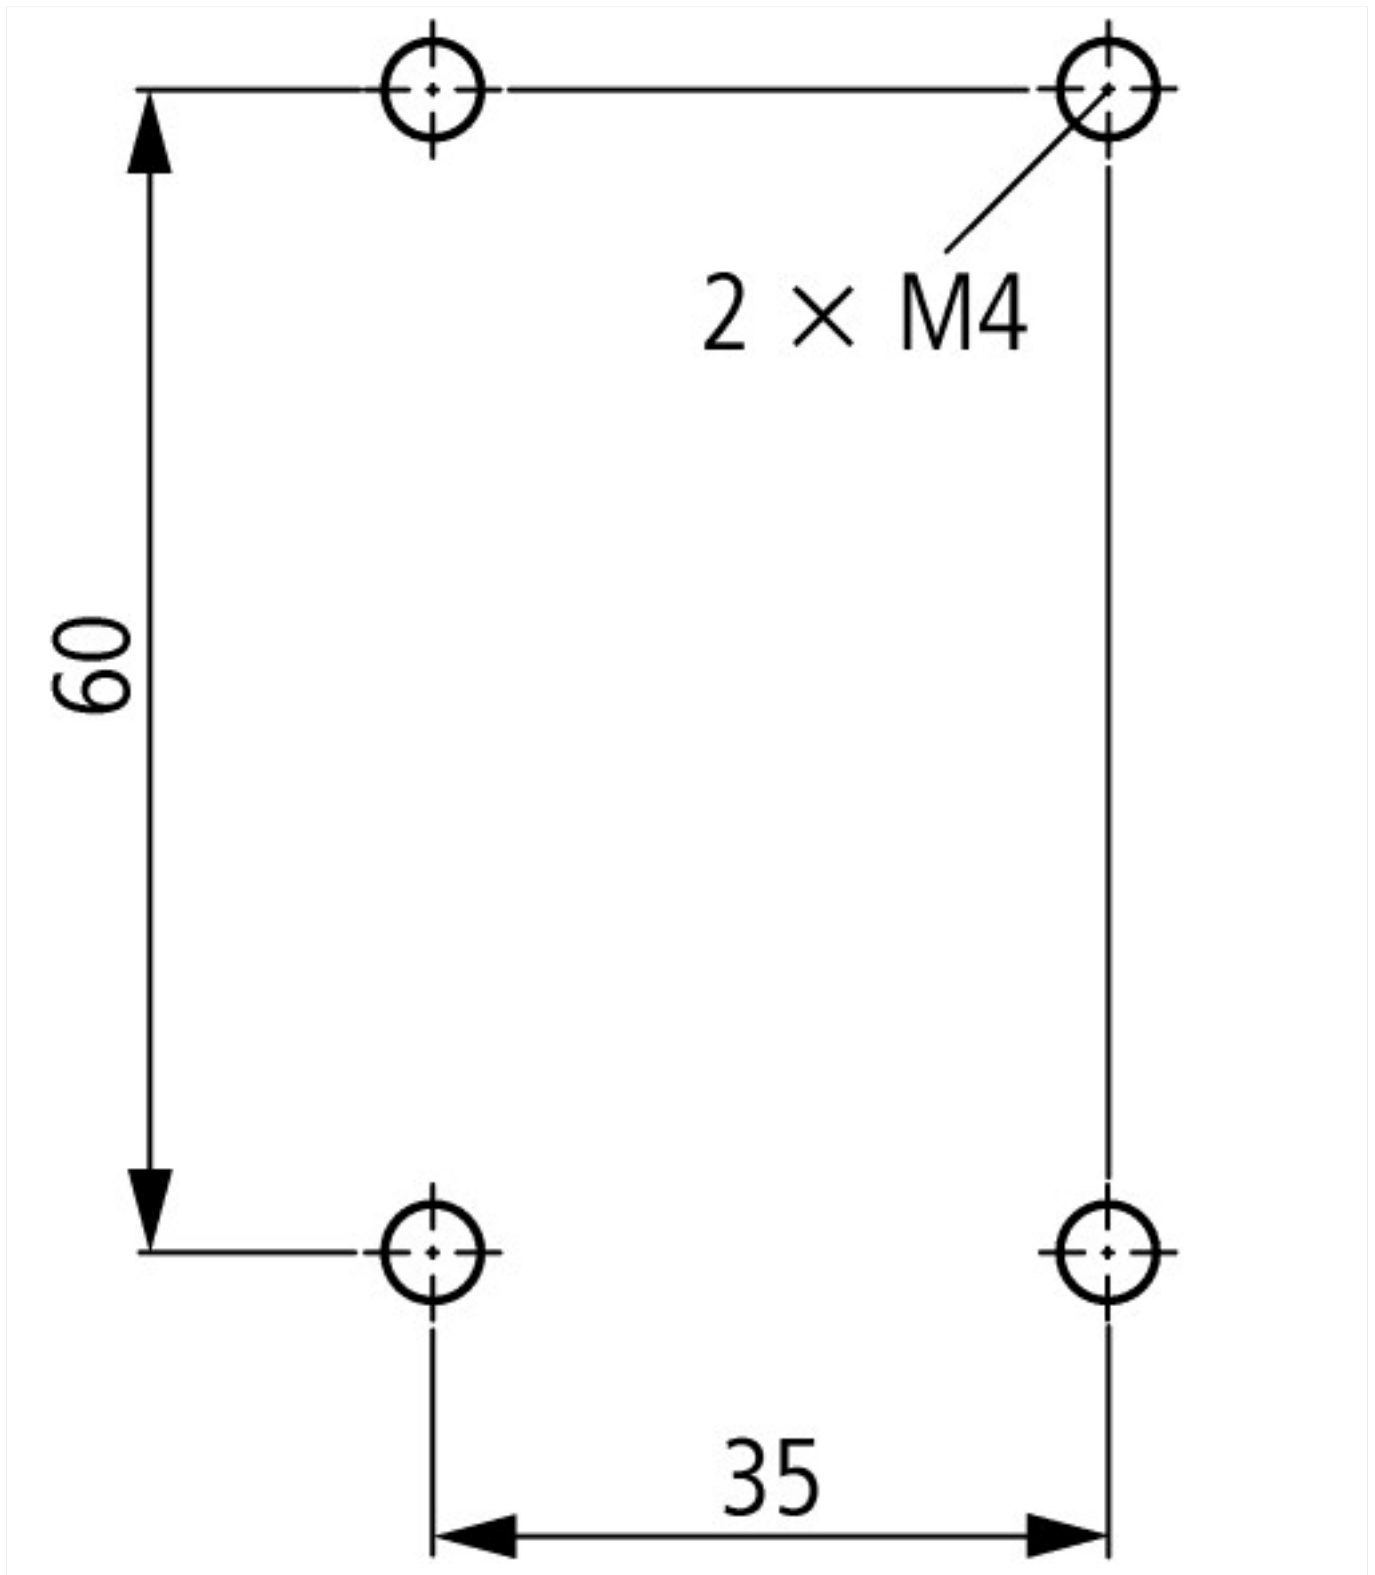

Additional product information (links)

IL03407013Z (AWA2100-2126) Contactors

IL03407013Z (AWA2100-2126)
Contactors

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2012_03.pdf

<http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&startpage=5.84>

Switchgear of Power Factor Correction
Systems

http://www.moeller.net/binary/ver_techpapers/ver934en.pdf

X-Start - Modern Switching
Installations Efficiently Fitted and
Wired Securely

http://www.moeller.net/binary/ver_techpapers/ver938en.pdf

Mirror Contacts for Highly-Reliable
Information Relating to Safety-Related
Control Functions

http://www.moeller.net/binary/ver_techpapers/ver944en.pdf

Effect of the Cabel Capacitance of
Long Control Cables on the Actuation
of Contactors

http://www.moeller.net/binary/ver_techpapers/ver949en.pdf

| | |
|--|---|
| Motor starters and "Special Purpose Ratings" for the North American market | http://www.moeller.net/binary/ver_techpapers/ver953en.pdf |
| Switchgear for Luminaires | http://www.moeller.net/binary/ver_techpapers/ver955en.pdf |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | http://www.moeller.net/binary/ver_techpapers/ver956en.pdf |
| The Interaction of Contactors with PLCs | http://www.moeller.net/binary/ver_techpapers/ver957en.pdf |
| Busbar Component Adapters for modern Industrial control panels | http://www.moeller.net/binary/ver_techpapers/ver960en.pdf |