# **Automation Technology**





Product description Contacts: 8, female connector with X-coding, dip-solder

M12-D, M12-X Series 825/876 X-coding

Order number 09 3782 95 08

# Illustration





You can find the component part drawing and assembly instructions on the next page.

## **Technical data**

### **General values**

Connector design Connector locking system Termination

Upper limit temperature Lower limit temperature

### **Cable data**

Approval 1

cable connector bolted dip-solder 85 °C

-40 °C

UL

### **Electrical values**

Rated voltage 50V AC, 60V DC V Pollution degree Overvoltage category Ш Insulating material group Ш Rated current (40 °C) 0,5 A Volume resistivity  $\leq 15 \text{ m}\Omega$ shielded EMC compliance Degree of protection IP67 Mechanical operation > 100 Mating cycles

### Material

Contact material CuSn (bronze) Contact plating Au (gold) Contact body material

# **Automation Technology**




Product description Contacts: 8, female connector with X-coding, dip-solder

Area M12-D, M12-X Series 825/876 X-coding

Order number 09 3782 95 0

# Flanschdose female panel mount connector

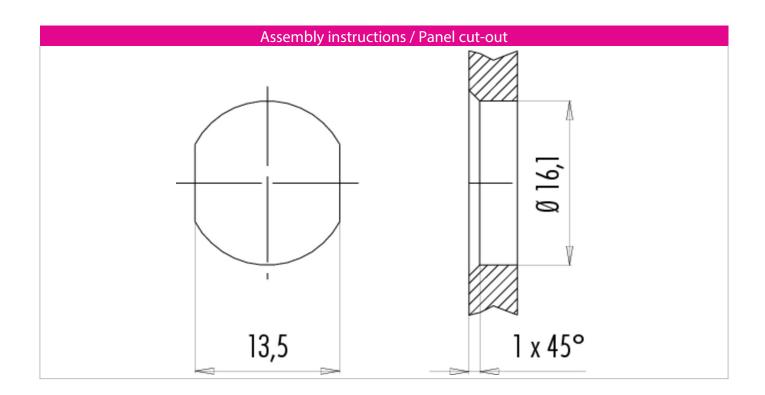




# **Automation Technology**



Product description Contacts: 8, female connector with X-coding, dip-solder

Area M12-D, M12-X Series 825/876 X-coding

Order number **09 3782 95 08** 

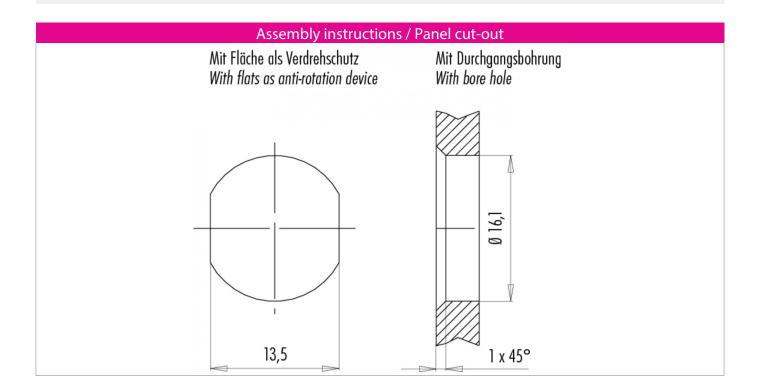

# **Automation Technology**



Product description Contacts: 8, female connector with X-coding, dip-solder

Area M12-D, M12-X Series 825/876 X-coding

Order number **09 3782 95 08** 

### Sicherheitshinweise

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).