# SMART SENSOR BUSINESS

# Leuze electronic

the sensor people



Part no.: 50119987 CML720i-R05-240.R/L-M12 Light curtain receiver



Figure can vary

# Contents

- Technical data
- · Dimensioned drawings
- Electrical connection
- · Operation and display
- Suitable transmitters
- Part number code
- Notes
- Accessories

## Part no.: 50119987 – CML720i-R05-240.R/L-M12 – Light curtain receiver

#### **Technical data**

Basic data	
Series	720
Operating principle	Throughbeam principle
Device type	Receiver
Contains	Accessories for the use of the BT-2R1
Application	Object measurement
	Object measurement
<b>•</b> • • • • •	
Special design	Oracia de la construcción de
Special design	Crossed-beam scanning Diagonal-beam scanning Parallel-beam scanning
Optical data	
Operating range	Guaranteed operating range
Operating range	0.1 3.5 m
Operating range limit	Typical operating range
Operating range limit	0.1 4.5 m
Measurement field length	240 mm
Number of beams	48 Piece(s)
Beam spacing	5 mm
Measurement data	
Minimum object diameter	10 mm
Electrical data	
Protective circuit	Polarity reversal protection
	Short circuit protected Transient protection
Performance data	
Supply voltage UB	18 30 V , DC
	18 30 V , DC 0 15 % , From U <sub>B</sub>
Supply voltage UB	
Supply voltage U <sub>B</sub> Residual ripple	0 15 % , From $U_B$ 0 165 mA , The specified values refer to the entire package con-
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current	0 15 % , From $U_B$ 0 165 mA , The specified values refer to the entire package con-
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current <i>Inputs/outputs selectable</i>	0 15 % , From $U_B$ 0 165 mA , The specified values refer to the entire package consisting of transmitter and receiver.
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max.	0 15 % , From U <sub>B</sub> 0 165 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance	0 15 % , From U <sub>B</sub> 0 165 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable	0 15 % , From U <sub>B</sub> 0 15 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s)
Supply voltage UB Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type	0 15 % , From U <sub>B</sub> 0 165 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable
Supply voltage UB Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	0 15 % , From U <sub>B</sub> 0 15 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC
Supply voltage UB   Residual ripple   Open-circuit current   Inputs/outputs selectable   Output current, max.   Input resistance   Number of inputs/outputs selectable   Type   Voltage type, outputs   Switching voltage, outputs	0 15 % , From U <sub>B</sub> 0 15 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: ≥6V
Supply voltage UB Residual ripple Open-circuit current <i>Inputs/outputs selectable</i> Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	0 15 % , From U <sub>B</sub> 0 15 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC
Supply voltage UB   Residual ripple   Open-circuit current   Inputs/outputs selectable   Output current, max.   Input resistance   Number of inputs/outputs selectable   Type   Voltage type, outputs   Switching voltage, outputs   Voltage type, inputs   Switching voltage, inputs   Input/output 1	0 15 % , From U <sub>B</sub> 0 15 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: ≥6V Iow: ≤4V
Supply voltage UB Residual ripple Open-circuit current <i>Inputs/outputs selectable</i> Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	0 15 % , From U <sub>B</sub> 0 15 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: ≥6V
Supply voltage UB Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Switching voltage, inputs Input/output 1 Activation/disable delay	0 15 % , From U <sub>B</sub> 0 15 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: ≥6V Iow: ≤4V
Supply voltage UB   Residual ripple   Open-circuit current   Inputs/outputs selectable   Output current, max.   Input resistance   Number of inputs/outputs selectable   Type   Voltage type, outputs   Switching voltage, outputs   Voltage type, inputs   Switching voltage, inputs   Switching voltage, inputs   Type   Voltage type, inputs   Switching voltage, inputs   Switching voltage, inputs   Timing	0 15 % , From U <sub>B</sub> 0 15 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: ≥6V Iow: ≤4V
Supply voltage UB Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Switching voltage, inputs Input/output 1 Activation/disable delay	0 15 % , From U <sub>B</sub> 0 165 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: ≥6V Iow: ≤4V 0 1 ms

Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199

## Part no.: 50119987 – CML720i-R05-240.R/L-M12 – Light curtain receiver

Interface	
	IO-Link
Type IO-Link	10-LIIIK
COM mode	COM2
Specification	V1.0.1 V1.1
Min. cycle time	COM2 = 2.3 ms
Service interface	
Туре	IO-Link
IO-Link	
Function	Configuration via software Service
Connection	
Number of connections	2 Piece(s)
Plug outlet	Rear side
Connection 1	
Function	Configuration interface Signal IN Signal OUT Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded
Connection 2	
Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded
Mechanical data	
Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 263 mm
Housing material	Metal , Aluminum
Lens cover material	Plastic
Net weight	500 g
Housing color	Silver
Type of fastening	Groove mounting Via optional mounting device
One vertice and display	
Operation and display	LED
Type of display	OLED display
Number of LEDs	2 Piece(s)


## Part no.: 50119987 – CML720i-R05-240.R/L-M12 – Light curtain receiver

Software Teach-in	
-30 60 °C	
-40 70 °C	
IP 65	
III	
c CSA US	
IEC 60947-5-2	
90314990	
27270910	
27270910	
EC002549	
EC002549	


### **Dimensioned drawings**

All dimensions in millimeters

Part no.: 50119987 – CML720i-R05-240.R/L-M12 – Light curtain receiver

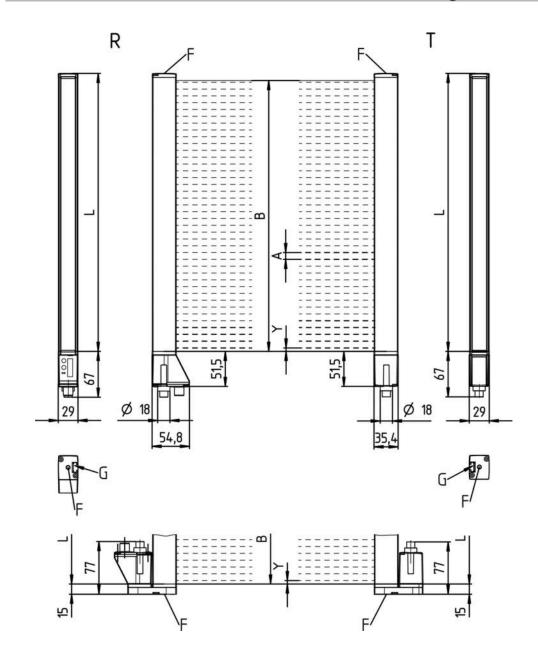

- A Beam spacing 5 mm B Measurement field length 240 mm
- F M6 thread
- G Fastening groove
- L Profile length 248 mm
- T Transmitter
- R Receiver
- Y 2.5 mm



Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199


## Part no.: 50119987 – CML720i-R05-240.R/L-M12 – Light curtain receiver

A PWR / SW IN/OUT

### **Electrical connection**

Connection 1		
Function	Configuration interface Signal IN Signal OUT Voltage supply	
Type of connection	Connector	
Thread size	M12	
Туре	Male	
Material	Metal	
No. of pins	8 -pin	
Encoding	A-coded	

Pin	Pin assignment
1	V+
2	101
3	GND
4	IO-Link
5	102
6	103
7	IO4
8	GND



Connection 2	
Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment
1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



## Part no.: 50119987 – CML720i-R05-240.R/L-M12 – Light curtain receiver

#### **Operation and display**

#### LEDs

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
		Measurement frequency display
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

#### Suitable transmitters

Part no.	Designation	Article	Description
 50119451	CML720i- T05-240.R-M12	Light curtain transmitter	Operating range: 0.1 3.5 m Connection: Connector, M12, Rear side, 5 -pin

#### Part number code

#### Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle: Measuring light curtain			
7XXi	Series: 720i: 720i series 730i: 730i series			
Y	Device type: T: transmitter R: receiver			
ZZ	Beam spacing: 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm			
AAAA	Measurement field length [mm], dependent on beam spacing			
В	Equipment: A: connector outlet, axial R: rear connector outlet			
CCC	Interface: L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus			
DDD	Special equipment: -PS: Power Setting			
EEE	Electrical connection: M12: M12 connector			
FFF	-EX: Explosion protection:			

#### Note

A list with all available device types can be found on the Leuze electronic website at www.leuze.com.

#### Part no.: 50119987 – CML720i-R05-240.R/L-M12 – Light curtain receiver

#### Notes

Observe intended use!

- This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

#### For UL applications:

• For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).

 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

### Accessories

### Connection technology - Connection cables

	Part no.	Designation	Article	Description
50		KD S-M12-8A- P1-050		Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

### Connection technology - Interconnection cables

Part no.	Designation	Article	Description
50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: IO-Link, DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

## Mounting technology - Mounting brackets

Part no.	Designation	Article	Description
50142900	BT 700M.5-2SET	Mounting device set	Contains: 2x mounting brackets, 1 teach template, 4 M6 x 10 screws Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

## Part no.: 50119987 – CML720i-R05-240.R/L-M12 – Light curtain receiver

## Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
RR.	429046	BT-2R1	set	Contains: 2x BT-R swivel mount, 1 cylinder for mounting on the light curtain Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.		Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

### Services

Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

#### Note

A list with all available accessories can be found on the Leuze electronic website in the Download tab of the article detailed page.