EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

0603 Package Chip LED(0.6mm Height)

19-213/R6C-AQ1R2B/3T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version

Descriptions

- The 19-213 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Part No.	Chip	Emitted Color	Resin Color	
rart No.	Material	Emitted Color		
19-213/R6C-AQ1R2B/3T	AlGaInP	Brilliant Red	Water Clear	




Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 1 of 10 Device No:SZDSE-193-R25 Prepared date:21-Mar-2007 Prepared by: duang jing fen


Revision : 1 Release Date:2008-09-20 00:16:11.0


LifecyclePhase:正式發行 Expired Period: Forever




Package Outline Dimensions








For reflow soldering (Propose)





Note: Tolerances Unless Dimension is ± 0.1 mm, Unit = mm

Rev 1 Page: 2 of 10
Release Date: 2008-09-20 00:16:11.0
Prepared by: duang jing fen

Page: 3 of 10

Release Date: 2008-09-20 00:16:11.0 Prepared by: duang jing fen

Expired Period: Forever

Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA
Power Dissipation	Pd	60	mW
Electrostatic Discharge(HBM)	ESD	2000	V
Operating Temperature	Topr	- 40 ∼ +85	
Storage Temperature	Tstg	- 40 ∼ +90	
Soldering Temperature	Tsol	Reflow Soldering Hand Soldering:	

Electro-Optical Characteristics (Ta=25)

	(
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	72.0	4	180	med	
Viewing Angle	201/2		120	7	deg	
Peak Wavelength	λр	7 1	632		nm	
Dominant Wavelength	λd	617.5		633.5	nm	I _F =20mA
Spectrum Radiation Bandwidth	λ		20		nm	
Forward Voltage	V_{F}	1.75		2.35	V	
Reverse Current	I_R			10	μΑ	V _R =5V

Notes:

- 1.Tolerance of Luminous Intensity ±11 %
- 2. Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage ±0.1V

Bin Range Of Dom. Wavelength

Groups	Bin	Min	Max	Unit	Condition	
A	E4	617.5	621.5			
	E5	621.5	625.5	nm	I _F =20mA	
	E6	625.5	629.5			
	E7	629.5	633.5			

Bin Range Of Luminous Intensity

	J					
Bin	Min	Max	Unit	Condition		
Q1	72.0	90.0				
Q2	90.0	112	1	I _F =20mA		
R1	112	140	mcd			
R2	140	180				

Bin Range Of Forward Voltage

- 8-		<i>3</i>			
Groups	Bin	Min	Max	Unit	Condition
	0	1.75	1.95		-
В	1	1.95	2.15	V	I _F =20mA
	2	2.15	2.35		

Notes:


- 1.Tolerance of Luminous Intensity ±11%
- 2. Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage ±0.1V

Rev 1 Page: 4 of 10

Release Date: 2008-09-20 00:16:11.0

Prepared by: duang jing fen

Typical Electro-Optical Characteristics Curves

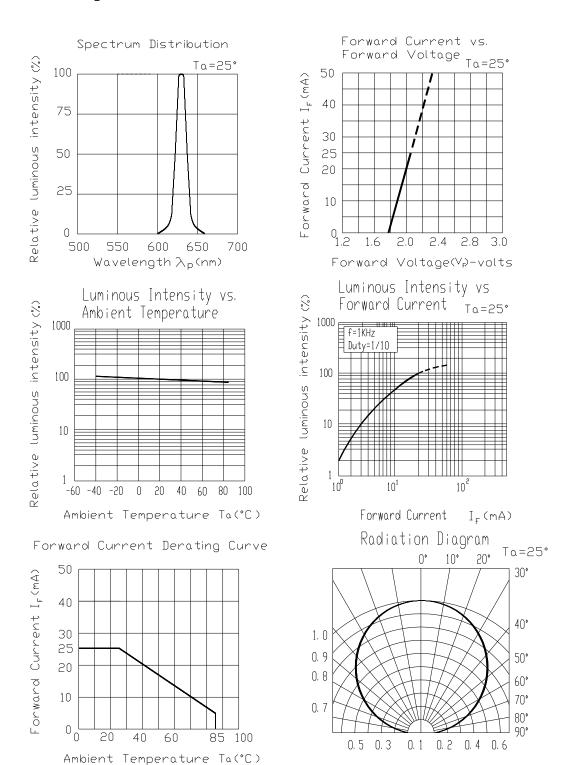

Rev 1 Page: 5 of 10
Release Date: 2008-09-20 00:16:11.0
Prepared by: duang jing fen

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

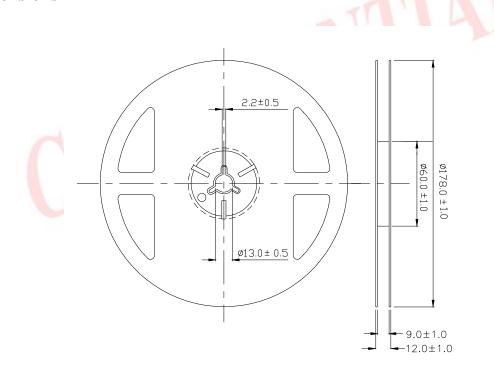


Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm.

Rev 1 Page: 6 of 10

Release Date: 2008-09-20 00:16:11.0


Prepared by: duang Jing fen

Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

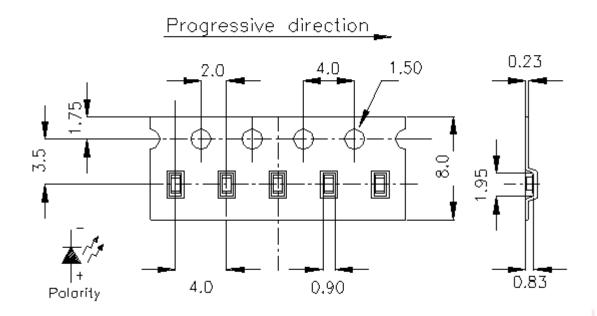

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

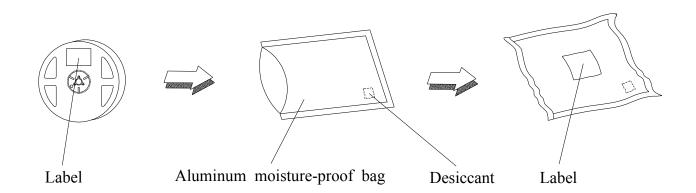

Rev 1 Page: 7 of 10
Release Date: 2008-09-20 00:16:11.0
Prepared by: duang jing fen
Expired Period: Forever

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp.: 260 ±5 Min. 5sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	H:+100 15min ∫ 5 min L:-40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp.: 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 /85%RH	1000 Hrs.	22 PCS.	0/1

Rev 1 Page: 8 of 10
Release Date: 2008-09-20 00:16:11.0
Prepared by: duang jing fen

Precautions For Use

- Over-current-proof
 Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change (Burn out will happen).
- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30 or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5 for 24 hours.
- 3. Soldering Condition
 - 3.1 Pb-Free solder temperature profile

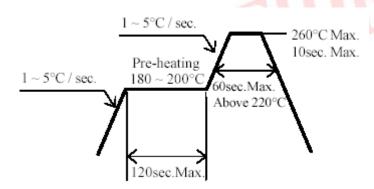

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Rev 1 Page: 9 of 10

Release Date: 2008-09-20 00:16:11.0

Prepared by: duang jing fen




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

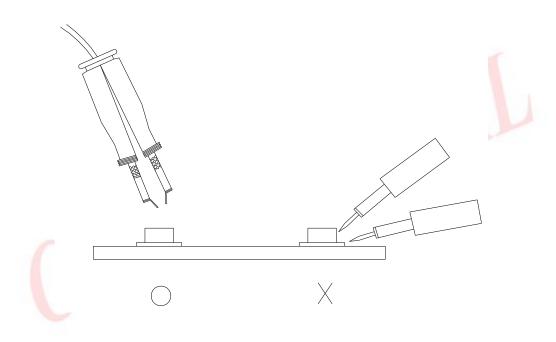

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Rev 1 Page: 10 of 10

Release Date: 2008-09-20 00:16:11.0

Prepared by: duang jing fen