

ECS-TXO-20CSMV Clipped Sine Wave SMD TCXO MultiVolt™ capability of 1.7 ~ 3.465V. The 2.0 x 1.6 x 0.8 mm ceramic package is ideal for portable, wireless applications where stability is critical.

[Request a Sample](#)

### OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS




- Clipped Sine Wave TCXO
- 2.0 x 1.6 mm Footprint
- MultiVolt™ (1.7 ~ 3.465V)
- PbFree/RoHS Compliant
- MSL 1
- Lead Finish Au
- Compatible with 1.8V, 2.5V or 3.3V Power Supply

Parameters	Conditions	ECS-TXO-20CSMV			Units
		MIN	TYP	MAX	
<b>Frequency Range</b>		10.000		52.000	MHz
<b>Frequency Tolerance</b>	@ +25°C ±2°C			±2.0	PPM
<b>Frequency Stability</b>	Vs. Temp (-40 ~ +85°C) BN Opt			±1.0	PPM
	Vs. Supply Change (±5%)			±0.2	PPM
	Vs. Load Change (±10%)			±0.2	PPM
	Vs. Aging 1 <sup>st</sup> Year			±1.0	PPM
<b>Input Voltage</b>	VDD	+1.7		+3.465	VDC
<b>Current Consumption</b>	10 ~ 26 MHz			2.0	mA
	26.1 ~ 52 MHz			2.5	mA
<b>Output Level</b>	Clipped Sine Wave	0.8			V p-p
<b>Output Load</b>		10KΩ//10 pF			
<b>Start-up Time</b>				2	mS
<b>Phase Noise</b>	@ 10 KHz Offset		-145		dBc/Hz
<b>Operating Temperature</b>	* N Option	-40		+85	°C
<b>Storage Temperature</b>		-40		+90	°C



### Part Numbering Guide: Example ECS-TXO-20CSMV-320-BN-TR

ECS	Series	Frequency Abbreviations	Stability	Temperature	Packaging
ECS	TXO-20CSMV = Clipped Sine Wave TCXO	260 = 26.000 MHz	A= ±0.5 ppm B= ±1.0 ppm C= ±1.5 ppm D= ±2.0 ppm E= ±2.5 ppm	L= -10 ~ +70°C M= -20 ~ +70°C Y= -30 ~ +85°C N= -40 ~ +85°C	TR = 1K TR3 = 3K Qty/Reel

**Package Dimensions (mm)**

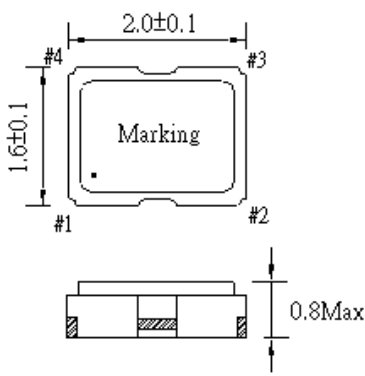

*Figure 1) Top, Side, and Bottom views*

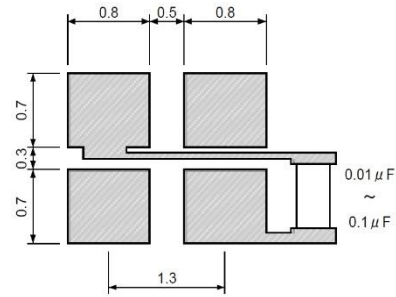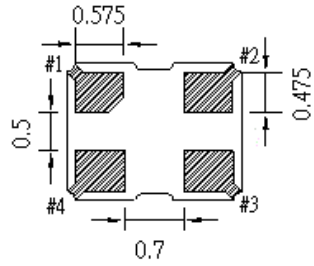

*Figure 2) Land Pattern*

Pin Connections	
#1	Ground
#2	Ground
#3	Output
#4	VDD

Developed Frequencies	
* Abbreviation	Frequency (MHz)
200	20.000
260	26.000
320	32.000
384	38.400
390	39.000
400	40.000

