

# iC-WK, iC-WKL

## 2.4V CW LASER DIODE DRIVER



Rev C2, Page 1/7


### FEATURES

- ◆ CW operation up to 70mA from 2.4..6V supply voltage and up to 4A with an external power transistor
- ◆ Rapid soft start after power-on typical within 70µs
- ◆ Simple power adjustment via the external resistor
- ◆ Control loop accuracy better than 1% with changes in temperature, supply voltage and load current
- ◆ Integrated reverse polarity protection for the iC and laser diode
- ◆ Strong suppression of transients with very small external capacitors; integrated flyback path
- ◆ Permanent shutdown with excessive temperature and overcurrent (i.e. if the laser diode is damaged or the feedback current path fails)
- ◆ Two feedback inputs permit all current LD types to be used (M/P/N configurations)
- ◆ Modulation via the feedback inputs is possible
- ◆ Wide monitor current range from 10µA to 2.5mA

### APPLICATIONS

- ◆ Battery-powered LD modules
- ◆ LD Pointers
- ◆ Bar-code readers

### PACKAGES




SO8



MSOP8

### BLOCK DIAGRAM

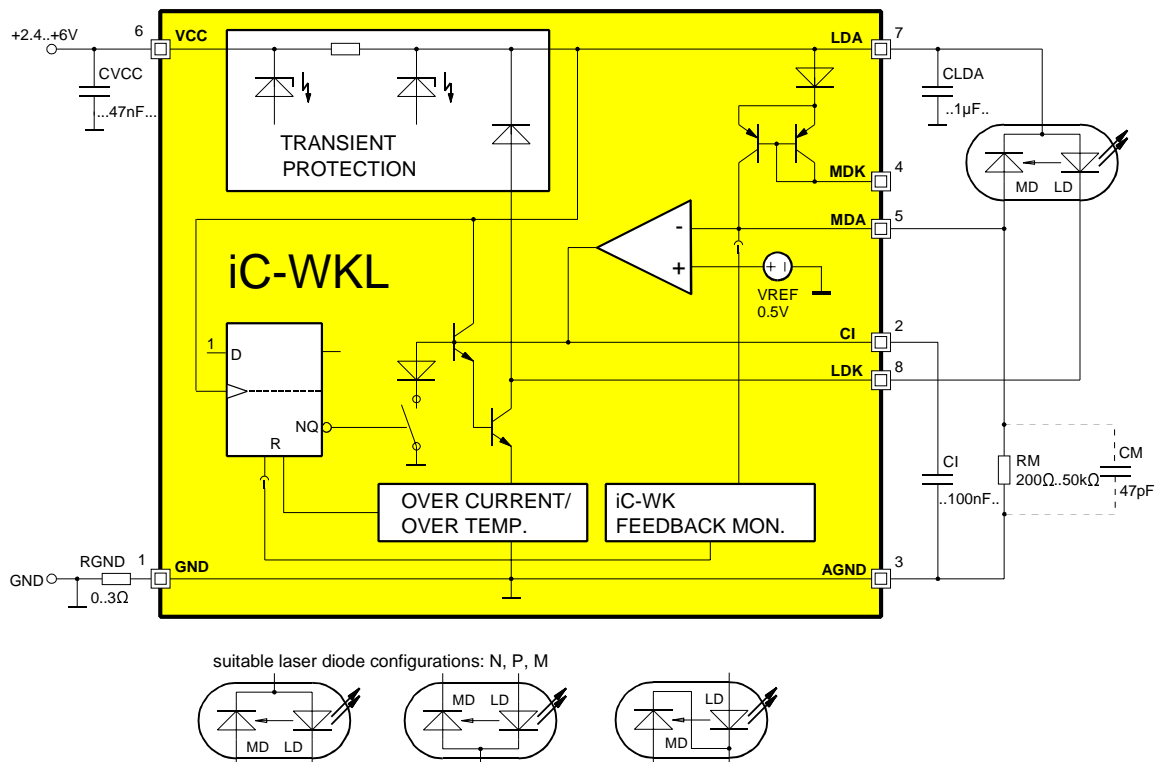

# iC-WK, iC-WKL

## 2.4V CW LASER DIODE DRIVER



Rev C2, Page 2/7

### DESCRIPTION

The iC-WK/L device is a driver for laser diodes in continuous wave operation which requires only four external components. The wide power supply range of 2.4V to 6V and the integrated reverse battery protection allow for battery operation with a minimum of two cells. A reversed battery connection destroys neither the iC nor the laser diode.

The iC includes integrated circuitry protecting against destruction by ESD, excessive temperature and over-current and a soft start which regulates the power and protects the laser diode when the power supply is switched on. The iC also filters the laser diode power supply for transients.

The power supply is regulated and adapted for the laser diode used by an external resistor at MDA. The monitor current acts as a reference and is regulated independent of the influence of temperature and supply voltage (range: 10 $\mu$ A to 2.5mA). The capacitor at CI determines the recovery time constants and start-up time.

A second monitor input, pin MDK, allows the driver to be used for other types of laser diode configuration; alternatively, it can be used as an analog modulation input (DC to a few kHz).


In the event of failure, such as overcurrent in the laser path with a lack of feedback, for example, a quick power lockout is activated. The shutdown continues until power is reapplied, permitting a restart. The strain on power packs and batteries is relieved and the laser class is retained even in the event of a disturbance.

iC-WK offers additional protection by means of spike detection at pin MDA. Should spike or oscillation occur at pin MDA the power lockout is activated.

### PACKAGES SO8, MSOP8 to JEDEC Standard

#### PIN CONFIGURATION SO8

(top view)

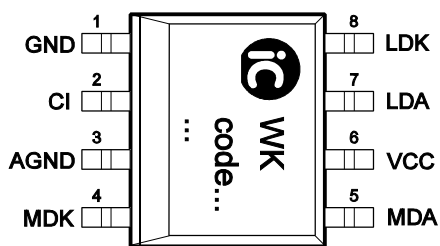


#### PIN FUNCTIONS

No. Name Function

1	GND	Ground
2	CI	Capacitance for Power Control
3	AGND	Reference Ground for CI, RM
4	MDK	Monitor Input 2 (MD Cathode, modulation)
5	MDA	APC Setup, Monitor Input 1 (MD Anode)
6	VCC	+2.4 .. +6V Supply Voltage
7	LDA	Laser Supply (LD Anode)
8	LDK	Driver Output (LD Cathode)

#### PIN CONFIGURATION MSOP8 (3mm)



# iC-WK, iC-WKL

## 2.4V CW LASER DIODE DRIVER



Rev C2, Page 3/7

### ABSOLUTE MAXIMUM RATINGS

Beyond these values damage may occur; device operation is not guaranteed.

Item	Symbol	Parameter	Conditions	Fig.			Unit
					Min.	Max.	
G001	VCC	Voltage at VCC			-6	6	V
G002	I(VCC)	Current in VCC			-10	95	mA
G003	I(CI)	Current in CI			-10	10	mA
G004	I(LDA)	Current in LDA			-95	10	mA
G005	I(LDK)	Current in LDK			-10	95	mA
G006	I(MDA)	Current in MDA			-10	10	mA
G007	I(MDK)	Current in MDK			-10	10	mA
G008	I(AGMD)	Current in AGND			-10	10	mA
G009	I(GND)	Current in GND			-95	10	mA
E001	Vd()	ESD Susceptibility at all pins	MIL-STD-883, Method 3015, HBM 100pF discharged through 1.5kΩ			2	kV
TG1	Tj	Operating Junction Temperature			-40	150	°C
TG2	Tj	Storage Temperature Range			-40	150	°C

### THERMAL DATA

Operating Conditions: VCC= 2.4..6V

Item	Symbol	Parameter	Conditions	Fig.				Unit
					Min.	Typ.	Max.	
T1	Ta	Operating Ambient Temperature Range			-40		85	°C
T2	Rthja	Thermal Resistance Chip/Ambient	SMD assembly, no additional cooling areas				140	K/W

All voltages are referenced to ground unless otherwise noted.

All currents into the device pins are positive; all currents out of the device pins are negative.

# iC-WK, iC-WKL

## 2.4V CW LASER DIODE DRIVER



Rev C2, Page 4/7

### ELECTRICAL CHARACTERISTICS

Operating Conditions: VCC= 2.4..6V, RM= 200Ω..50kΩ, Tj= -40..125°C unless otherwise noted

Item	Symbol	Parameter	Conditions	Tj °C	Fig.				Unit
						Min.	Typ.	Max.	
<b>Total Device</b>									
001	VCC	Permissible Supply Voltage				2.4		6	V
002	I(LDK)	Permissible Laser Drive Current (power control range)	Tj= -40..125°C Tj= -40..80°C			5 5		70 90	mA mA
003	I <sub>dc</sub> (VCC)	Supply Current without load path	closed control loop, I(MDK)= 0, RM= 200Ω, I(LDK)= 70mA				2.4	5	mA
004	I <sub>off</sub> (VCC)	Supply Current on Reset					2.4	5	mA
005	I <sub>r</sub> (VCC)	Reverse Supply Current	RM= 50kΩ			-6	-3		mA
006	t <sub>on</sub> ()	Turn-on Delay	VCC: 0V →5V to 95% I(LDK); I(LDK)= 60mA, C <sub>I</sub> = 47nF I(LDK)= 60mA, C <sub>I</sub> = 100nF					70 150	μs μs
007	V <sub>c</sub> (hi)	Clamp Voltage hi at VCC, LDA, MDK	I() <sub>l</sub> = 10mA, other pins open			6		9	V
008	V <sub>c</sub> (hi)	Clamp Voltage hi at LDK	V() <sub>c</sub> < VCC+1V; I() <sub>l</sub> = 10mA, other pins open			6		9	V
009	V <sub>c</sub> (hi)	Clamp Voltage hi at MDA	I() <sub>l</sub> = 10mA, other pins open iC-WKL iC-WK			6 1.1		9 4	V V
010	V <sub>c</sub> (hi)	Clamp Voltage hi at CI	I() <sub>l</sub> = 10mA, other pins open			1.1		4	V
011	V <sub>c</sub> (lo)	Clamp Voltage lo at VCC, LDA, MDK, MDA, CI	I() <sub>l</sub> = -10mA, other pins open			-9			V
<b>Reference and Monitor Inputs MDA, MDK, AGND</b>									
101	V(MDA)	Reference Voltage at MDA	closed control loop, V(LDK) >V <sub>s</sub> (LDK)			480	500	520	mV
102	dV(MDA)	Reference Voltage Temperature Drift at MDA	see 101;					120	μV/°C
103	I <sub>err</sub> (MDA)	Input Current in MDA	closed control loop, I(MDK)= 0, I(LDK)= 20..60mA			-300		300	nA
104	dI(MDA)	Input Current Temperature Drift in MDA	see 103;			-2		2	nA/°C
105	APC <sub>err</sub>	Control Error	RM= 10kΩ, Tj= 0..80°C RM= 10kΩ, Tj= -40..125°C					0.3 1	% %
106	dI(RM)	Supply Voltage Suppression	V(VCC): 2.4V →6V, I(LDK)= 70mA			-1		1	%
107	R <sub>gnd</sub> ()	Resistor AGND-GND						3	Ω
301	V <sub>f</sub> (MDK)	Voltage at MDK	V <sub>f</sub> ()= V(LDA) -V(MDK); I(MDK)= 1μA..1mA			0.46		2	V
302	CR()	Current Ratio I(MDA) / I(MDK)	I(MDK)= 10..500μA I(MDK)= 500μA..2,5mA			0.98 0.95		1.02 1.05	
303	TC()	Current Ratio Temperature Coefficient I(MDA) / I(MDK)	I(MDK)= 10..500μA I(MDK)= 500μA..2,5mA			-0.005 -0.025		0.005 0.025	%/°C %/°C
<b>Laser Drive LDA, LDK</b>									
201	V <sub>s</sub> (LDK)	Saturation Voltage at LDK	I(LDK)= 40mA I(LDK)= 70mA, Tj= -40..125°C I(LDK)= 90mA, Tj= -40..80°C					300 400 400	mV mV mV
202	dI(LD)	Load Balancing Error	I(LD)= 20mA, I(LDK): 20mA →70mA			-1		1	%
203	I <sub>t</sub> (LDK)	Overcurrent Threshold in LDK	Tj= -40..125°C Tj= -40..80°C			70 90	130	300 300	mA mA

# iC-WK, iC-WKL

## 2.4V CW LASER DIODE DRIVER



Rev C2, Page 5/7

### ELECTRICAL CHARACTERISTICS

Operating Conditions: VCC= 2.4..6V, RM= 200Ω..50kΩ, Tj= -40..125°C unless otherwise noted

Item	Symbol	Parameter	Conditions	Tj °C	Fig.				Unit	
						Min.	Typ.	Max.		
<b>Laser Drive LDA, LDK (continued)</b>										
204	toff()	Overcurrent Reset Delay	lack of feedback: I(RM)= 0 to I(LDK)= It(LDK); I(LDK)= 20mA, CI= 47nF I(LDK)= 20mA, CI= 100nF I(LDK)= 60mA, CI= 47nF I(LDK)= 60mA, CI= 100nF							85 μs 170 μs 60 μs 130 μs
205	Vf()	Diode Forward Voltage LDK-LDA	I(LDK)< 70mA							1.1 V
206	Rvcc()	Transient Protection Resistor	VCC vs. LDA							4 Ω
207	Vt(MDA)	Shutdown Threshold at MDA	iC-WK only			0.56				2 V
<b>Control Release Flip-Flop</b>										
401	VCCen	Set Threshold for Enable Flip-Flop				0.6				1.9 V
402	Toff	Overtemperature Shutdown				125				150 °C

### DESCRIPTION OF FUNCTIONS

#### Turn-on behaviour

After switching on the supply voltage the output stage remains disabled until the internal enabling flip-flop is set by a sufficiently high voltage at LDA.

A quick soft start occurs during phase I; the control capacitor CI is loaded at an accelerated rate until the output stage supplies current at LDK. An open-circuit voltage at pin MDA is used to verify the external resistance.

Phase 2, the initialization process, begins when current starts to flow at LDK. This phase ends when the laser reaches its threshold current and the monitor current produced raises the potential at resistor RM.

The transition to CW operation (phase 3) is gradual and primarily influenced by the CI and RM components. CI is properly dimensioned when the voltage overshoot at MDA is at a minimum.

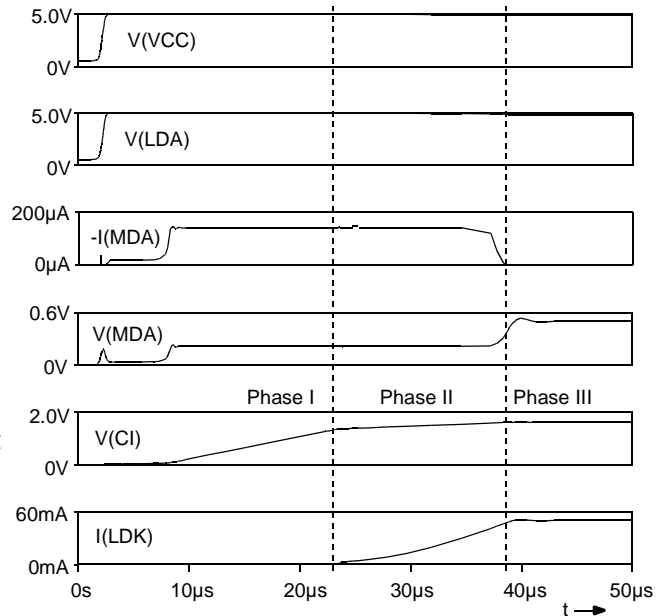


Fig. 1: Turn-on behaviour

#### Turn-off behaviour

iC-WK/L functions without a fixed undervoltage lockout, thus the laser diode forward voltage is the prime factor determining the lowest possible supply voltage.

If the voltage drops below this, the output stage is forcibly saturated and the laser current falls. In this instance iC-WK/L simultaneously discharges control capacitor CI so that no excessive laser diode currents occur when the supply voltage rises again.

#### Disruptions in operation

The power control is shut down with excessive driver temperature or when the laser current reaches the overcurrent shutdown threshold, for example when the feedback is interrupted. If the monitor diode or the preset resistor RM fail, the device is shutdown in less than 250µs, provided that the supply voltage applied is high enough. When modulating or switching the laser current via pin MDK (see Application Notes), excessive Voltage occurring at pin MDA also causes a shut down (iC-WK only).

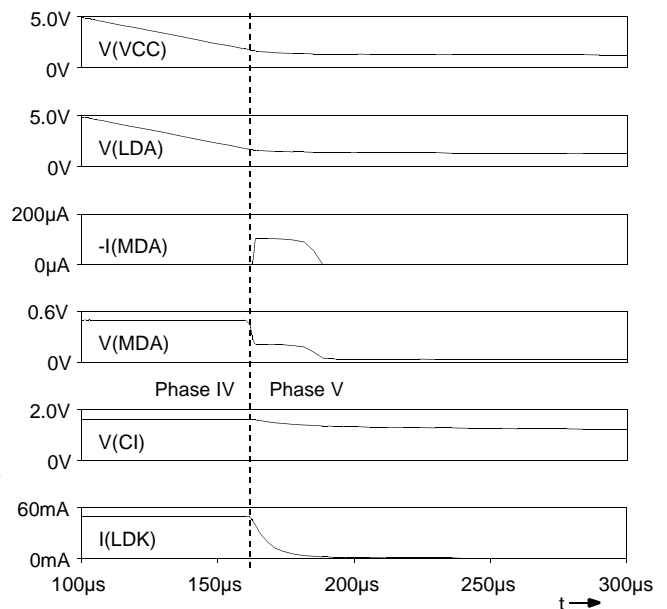


Fig. 2: Turn-off behaviour

# iC-WK, iC-WKL

## 2.4V CW LASER DIODE DRIVER



Rev C2, Page 7/7

### APPLICATION NOTES

Application notes on iC-WK, iC-WKL and the data sheets of the evaluation modules and the demo board are available as separate documents.

### ORDERING INFORMATION

Type	Package	Order designation
iC-WK	SO8	iC-WK SO8
	MSOP8	iC-WK MSOP8
iC-WKL	SO8	iC-WKL SO8
	MSOP8	iC-WKL MSOP8
WK module for P-/M-type lasers WK module for N-type lasers		iCSY WK1D
		iCSY WK2D
WKL module for P-/M-type lasers WKL module for N-type lasers		iCSY WKL1D
		iCSY WKL2D
WK demo board WKL demo board		WK3D
		WKL3D

For information about prices, terms of delivery, other packaging options etc., please contact:

**iC-Haus GmbH**  
**Am Kuemmerling 18**  
**D-55294 Bodenheim**  
**GERMANY**

**Tel +49-6135-9292-0**  
**Fax +49-6135-9292-192**  
**<http://www.ichaus.com>**

This specification is for a newly developed product. iC-Haus therefore reserves the right to modify data without further notice. Please contact us to ascertain the current data. The data specified is intended solely for the purpose of product description and is not to be deemed guaranteed in a legal sense. Any claims for damage against us - regardless of the legal basis - are excluded unless we are guilty of premeditation or gross negligence.

We do not assume any guarantee that the specified circuits or procedures are free of copyrights of third parties.

Copying - even as an excerpt - is only permitted with the approval of the publisher and precise reference to source.