



the sensor people





Figure can vary

Part no.: 50119859 CML720i-R20-1430.A/CV-M12 Light curtain receiver





Contents

- Technical data
- . Dimensioned drawings
- Electrical connection
- · Operation and display
- Suitable transmitters
- · Part number code
- Notes
- Accessories



Technical data

Pagin data	
Basic data	700
Series	720
Operating principle	Throughbeam principle
Device type	Receiver
Contains	2x BT-NC sliding block
Application	Object measurement
Special design	
Special design	Crossed-beam scanning Diagonal-beam scanning Parallel-beam scanning
Ontical data	
Optical data Operating range	Guaranteed operating range
	0.3 7 m
Operating range	
Operating range limit	Typical operating range
Operating range limit	0.2 9 m
Measurement field length	1,430 mm
Number of beams	72 Piece(s)
Beam spacing	20 mm
Measurement data	
Minimum object diameter	30 mm
Electrical data	
Electrical data	Delarity reversal protection
Protective circuit	Polarity reversal protection Short circuit protected Transient protection
Performance data	
Supply voltage U _B	18 30 V , DC
Residual ripple	0 15 % , From U _B
Open-circuit current	0 \dots 270 mA , The specified values refer to the entire package consisting of transmitter and receiver.
Outputs	
Number of analog outputs	2 Piece(s)
Analog outputs	
Current	0 24 mA
Voltage	0 11 V
Analog output 1	
Type	Voltage
Analog output 2	- · · · · · · · · · · · · · · · · · · ·
Type	Current
.,,,,	ourione



nputs/outputs selectable output current, max.	100 mA			
nput resistance	6,000 Ω			
<u>·</u>				
Number of inputs/outputs selectable	2 Piece(s)			
Type	Inputs/outputs selectable DC			
Voltage type, outputs				
Switching voltage, outputs	Typ. U _B / 0 V			
Voltage type, inputs	DC			
Switching voltage, inputs	high: ≥6V low: ≤4V			
Input/output 1				
Activation/disable delay	1 ms			
ming				
eadiness delay	450 ms			
rcle time	2.56 ms			
esponse time per beam	30 µs			
ervice interface				
pe pe	IO-Link			
•				
IO-I ink				
Function	Configuration via software Service			
Function onnection umber of connections	Configuration via software Service 2 Piece(s)			
Function pnnection	Service			
Function Onnection umber of connections	Service 2 Piece(s)			
Punction Punnection Imber of connections ug outlet	Service 2 Piece(s)			
Punction Connection umber of connections ug outlet Connection 1	Service 2 Piece(s) Axial Configuration interface Signal IN Signal OUT			
Function Connection umber of connections ug outlet Connection 1 Function	2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply			
Function connection umber of connections ug outlet Connection 1 Function Type of connection	2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector			
Function Connection Important of connections In goutlet Connection 1 Function Type of connection Thread size	2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector M12			
Function Connection Imper of connections In go outlet Connection 1 Function Type of connection Thread size Type	2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male			
Function Innection Important of connections Ing outlet Connection 1 Function Type of connection Thread size Type Material	2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal			
Function Connection Imber of connections Ing outlet Connection 1 Function Type of connection Thread size Type Material No. of pins	Service 2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin			
Function Connection Imber of connections Ug outlet Connection 1 Function Type of connection Thread size Type Material No. of pins Encoding	Service 2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin			
Function Connection Imber of connections Ing outlet Connection 1 Function Type of connection Thread size Type Material No. of pins Encoding Connection 2	Service 2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin A-coded			
Function Connection Imber of connections Ing outlet Connection 1 Function Type of connection Thread size Type Material No. of pins Encoding Connection 2 Function	Service 2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin A-coded Connection to transmitter			
Function Connection Imber of connections Ing outlet Connection 1 Function Type of connection Thread size Type Material No. of pins Encoding Connection 2 Function Type of connection	Service 2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin A-coded Connection to transmitter Connector			
Function Connection Imber of connections Ing outlet Connection 1 Function Type of connection Thread size Type Material No. of pins Encoding Connection 2 Function Type of connection Type of connection	Service 2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin A-coded Connection to transmitter Connector M12			
Function Innection Imber of connections Ing outlet Connection 1 Function Type of connection Thread size Type Material No. of pins Encoding Connection 2 Function Type of connection Thread size Type of connection	Service 2 Piece(s) Axial Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin A-coded Connection to transmitter Connector M12 Female			

Cubic

Metal , Aluminum

29 mm x 35.4 mm x 1,515 mm

Design

Dimension (W x H x L)

Housing material



Lens cover material	Plastic			
Net weight	1,600 g			
Housing color	Silver			
Type of fastening	Groove mounting Via optional mounting device			
Operation and display				
Type of display	LED OLED display			
Number of LEDs	2 Piece(s)			
Type of configuration	Software Teach-in			
Operational controls	Membrane keyboard			
Environmental data				
Ambient temperature, operation	-30 60 °C			
Ambient temperature, storage	-40 70 °C			
Certifications				
Degree of protection	IP 65			
Protection class	III			
Certifications	c CSA US			

Classification				
Customs tariff number	90314990			
eCl@ss 8.0	27270910			
eCl@ss 9.0	27270910			
ETIM 5.0	EC002549			
ETIM 6.0	EC002549			


IEC 60947-5-2

Dimensioned drawings


All dimensions in millimeters

Standards applied



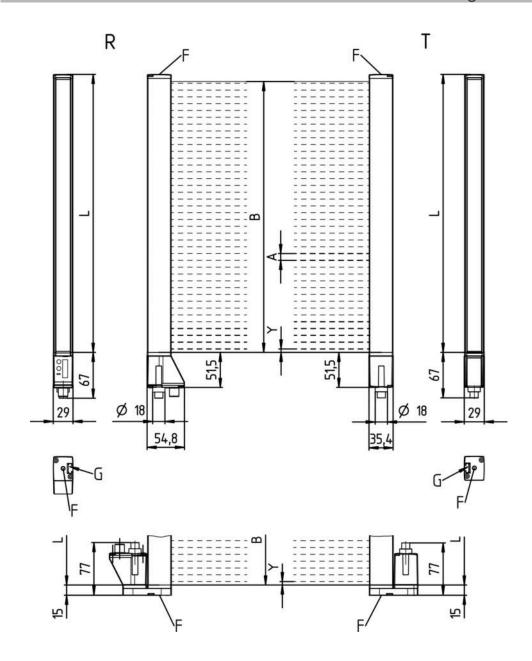

- A Beam spacing 20 mm B Measurement field length 1430 mm
- F M6 thread
- G Fastening groove
- L Profile length 1448 mm
- T Transmitter
- R Receiver
- Y 5 mm

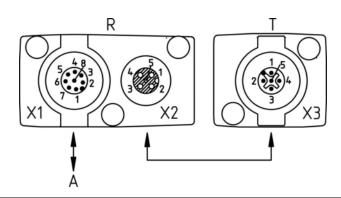




APWR / SW IN/OUT

Electrical connection


Connection 1	
Function	Configuration interface Signal IN Signal OUT Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin	Pin assignment
1	V+
2	I/O 1
3	GND
4	IO-Link
5	I/O 2
6	OUT V
7	OUT mA
8	AGND



Connection 2	
Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment
1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-





Operation and display

LEDs

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
		Measurement frequency display
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

Part no.	Designation	Article	Description
50119431	CML720i- T20-1430.A-M12	Light curtain transmitter	Operating range: 0.3 6 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle: Measuring light curtain
7XXi	Series: 720i: 720i series 730i: 730i series
Υ	Device type: T: transmitter R: receiver
ZZ	Beam spacing: 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment: A: connector outlet, axial R: rear connector outlet
ccc	Interface: L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment: -PS: Power Setting
EEE	Electrical connection: M12: M12 connector
FFF	-EX: Explosion protection:

B. I	_	4	
N	n	П	E

A list with all available device types can be found on the Leuze electronic website at www.leuze.com.



Notes

Observe intended use!

- · This product is not a safety sensor and is not intended as personnel protection.
- · The product may only be put into operation by competent persons.
- · Only use the product in accordance with its intended use.

For UL applications:

- · For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

Part no.	Designation	Article	Description
50135128	KD S-M12-8A- P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Connection technology - Interconnection cables

Part no.	Designation	Article	Description
	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: IO-Link, DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Mounting technology - Mounting brackets

Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Contains: 2x mounting brackets, 1 teach template, 4 M6 x 10 screws Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199



Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
EE.	429046	BT-2R1	Mounting bracket set	Contains: 2x BT-R swivel mount, 1 cylinder for mounting on the light curtain Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

	Part no.	Designation	Article	Description
166	50121098	SET MD12-US2-IL1.1 + Zub.		Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

Note

A list with all available accessories can be found on the Leuze electronic website in the Download tab of the article detailed page.