

Retro-Reflex Sensor for Clear Glass Recognition

P1NK206

Part Number



- Condition monitoring
- IO-Link 1.1
- No blind spot from single-lens optics
- Special for glass, PET and films

The retro-reflex sensor for clear glass recognition works with red light and a reflector. Where conventional retro-reflex light barriers reach their limits, this retro-reflective barrier for clear glass recognition ensures that extremely shiny objects like glass, PET bottles, trays or film can be detected. Via the single-lens optic without blind spots, the sensor can detect objects even through small holes and gaps. The IO-Link interface can be used to configure retro-reflective barriers (PNP/NPN, NC/NO, switching distance), as well as for reading out switching statuses and signal values.



Technical Data

Optical Data	
Range	2600 mm
Reference Reflector/Reflector Foil	RQ100BA
Clear Glass Recognition	yes
Smallest Recognizable Part	see Table 2
Switching Hysteresis	< 5 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Single-Lens Optic	yes

Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Switching Frequency	2000 Hz
Switching frequency (speed mode)	3500 Hz
Response Time	0,25 ms
Response time (speed mode)	0,14 ms
Temperature Drift	< 3 %
Temperature Range	-40...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Interface	IO-Link V1.1
Protection Class	III


Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic
Degree of Protection	IP67/IP68
Connection	M12 × 1; 4-pin
Optic Cover	PMMA

Safety-relevant Data	
MTTFd (EN ISO 13849-1)	2690,44 a


IO-Link	●
NPN NO/NC antivalent	●
Connection Diagram No.	213
Control Panel No.	A28
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	350

Complementary Products


Dust Extraction Tube STAUBTUBUS-03
IO-Link Master
Reflector, Reflector Foil
Set Protective Housing Z1NS001
Software

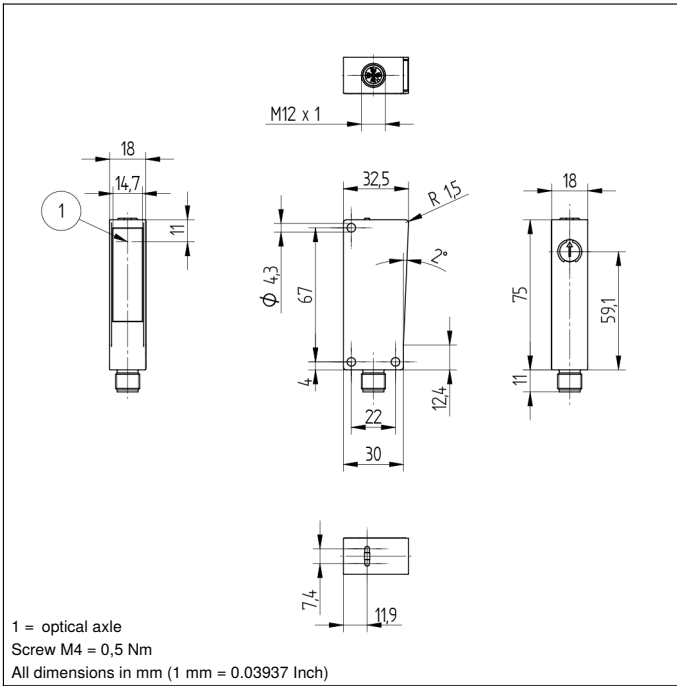

Ctrl. Panel

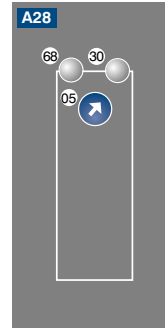

05 = Switching Distance Adjuster
 30 = Switching Status/Contamination Warning
 68 = Supply Voltage Indicator

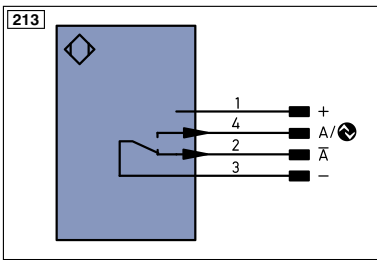

Legend

+	Supply Voltage +	PT	Platinum measuring resistor	EN ^{A/RS422}	Encoder A/Ā (TTL)
-	Supply Voltage 0 V	nc	not connected	EN ^{B/RS422}	Encoder B/B̄ (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	EN ^A	Encoder A
A	Switching Output (NO)	Ū	Test Input inverted	EN ^B	Encoder B
Ā	Switching Output (NC)	W	Trigger Input	A _{MIN}	Digital output MIN
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input	A _{MAX}	Digital output MAX
Ṽ	Contamination/Error Output (NC)	O	Analog Output	A _{OK}	Digital output OK
E	Input (analog or digital)	O-	Ground for the Analog Output	SY _{in}	Synchronization In
T	Teach Input	BZ	Block Discharge	SY _{OUT}	Synchronization OUT
Z	Time Delay (activation)	A _{WV}	Valve Output	OL _T	Brightness output
S	Shielding	a	Valve Control Output +	M	Maintenance
RxD	Interface Receive Path	b	Valve Control Output 0 V	rsv	reserved
TxD	Interface Send Path	SY	Synchronization	Wire Colors according to DIN IEC 757	
RDY	Ready	SY-	Ground for the Synchronization	BK	Black
GND	Ground	E+	Receiver-Line	BN	Brown
CL	Clock	S+	Emitter-Line	RD	Red
E/A	Output/Input programmable	⊕	Grounding	OG	Orange
	IO-Link	S _{nR}	Switching Distance Reduction	YE	Yellow
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path	GN	Green
IN	Safety Input	Tx+/-	Ethernet Send Path	BU	Blue
OSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
Signal	Signal Output	L _a	Emitted Light disengageable	GY	Grey
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation	WH	White
EN ^{0/RS422}	Encoder 0-pulse 0-0̄ (TTL)	RES	Input confirmation	PK	Pink
		EDM	Contactur Monitoring	GNVE	Green/Yellow

Table 1

Working Distance	0,5 m	1,3 m	2,6 m
Light Spot Diameter	30 mm	45 mm	80 mm

Table 2

Distance, Sensor to Reflector	0,5 m	1,3 m	2,6 m
Smallest Recognizable Part	1,5 mm	4 mm	15 mm

Feasible reflector distance

Reflector type, mounting distance

RQ100BA	0...2,6 m	RR21_M	0...0,65 m
RE18040BA	0...1,5 m	ZRAE02B01	0...0,9 m
RQ84BA	0...1,8 m	ZRME01B01	0...0,25 m
RR84BA	0...2,2 m	ZRME03B01	0...1,1 m
RE9538BA	0...0,85 m	ZRMR02K01	0...0,3 m
RE6151BM	0...2 m	ZRMS02_01	0...0,5 m
RR50_A	0...1,55 m	RF505	0...0,4 m
RE6040BA	0...1,8 m	RF508	0...0,4 m
RE8222BA	0...1,1 m	RF258	0...0,4 m
RR34_M	0...1,2 m	ZRAF07K01	0...0,4 m
RE3220BM	0...0,9 m	ZRAF08K01	0...0,4 m
RE6210BM	0...0,5 m	ZRDF03K01	0...1,3 m
RR25_M	0...0,65 m	ZRDF10K01	0...1,4 m
RR25KP	0...0,35 m		

