


OSLON® P1616 Broadband MicroOSLON

ILM-IP01-BBEM-SC201-WIR200.

Product Overview

At the heart of each MicroOSLON is the OSLON P1616 Broadband LED from OSRAM Opto Semiconductors. The OSLON P1616 LED emits broadband infrared light in wavelengths ranging from 650 to 1,050 nanometres (nm). It is ideal for near-infrared spectroscopy, which can be used to assess food, medicine and even measure body fat. The OSLON P1616 created a whole new field of compact, robust and low-cost sensing technology that did not exist before, making it possible to integrate spectrometers directly into mobile devices like smartphones and tablets. MicroOSLONs are compact, powerful LED light sources built on aluminium substrates for optimal thermal management. Available with 200mm wires as standard.

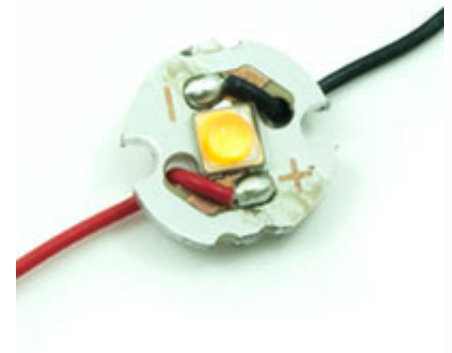

Applications

- Infrared Spectroscopy
- Medical
- Wearables

Technical Features

- Up to 50,000 hours lifetime to 70% of original brightness
- MicroOSLONs contain 1 OSLON P1616 LED from OSRAM Opto Semiconductors
- Secondary Lens can be fitted – check options in suitable Lens and Reflector section
- Suitable Heatsinks available – check options in Heatsink section
- Suitable Thermal Interface Material available – Please see Thermal Interface Material section
- Matching Power Supply available - check options in Power Supply section
- Mounting holes using M3 screws allow easy installation
- Available with 200mm connecting wires
- Size: (LxWxH) 11 x 11 x 2.41mm
- MicroOSLONs can be linked together to produce longer chains
- Forward Current: 500mA

*This datasheet should be read in conjunction with the relevant OSRAM Opto Semiconductors data on the LED used

Important Information and Precautions

- The MicroOLSON, when powered up, are very bright. Thus it is advised that you do not look directly at them. Turn the MicroOLSON away from you and do not shine into the eyes of others.
- MicroOLSONs will overheat in operation if not attached to a suitable Heatsink. Overheating can cause failure or irreparable damage.
- Do not operate MicroOLSONs with a Power Supply with unlimited current. Connection to constant voltage Power Supplies that are not current limited may cause the MicroOLSON to consume current above the specified maximum and cause failure or irreparable damage.
- MicroOLSONs, when operated, can reach high temperatures thus there is risk of injury if they are touched.
- DO NOT HOT PLUG ON LED SIDE OF POWER SUPPLY
- DO NOT TOUCH or PUSH on the LED as this might cause irreparable damage.

Product Options

ILS PART NUMBER	Wavelength *	Typical Wattage at 350mA §	Forward Voltage	Flux † at 350mA	Radiance Angle	Relevant OSRAM LED Data
ILM-IP01-BBEM-SC201-WIR200.	650-1050nm	1.48W	2.95-3.5V	74mW	120° (±60°)	SFH4737

* Due to the special conditions of the manufacturing processes of LEDs, the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.

§ Tolerance +/- 10%

† Measured with 20mS 350mA pulse at 25 °c

Minimum and Maximum Ratings


ILS PART NUMBER	Operating Temperature at Tc-Point [°C] *	Storage Temperature [°C] *	Forward Current per chip [mA] *	Surge Current	Reverse Voltage [Vdc] *
ILM-IP01-BBEM-SC201-WIR200.	-40 °C - 85 °C	-40 °C - 85 °C	500mA	1A	Not designed for reverse voltage

* Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED module.


Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED module.

The temperature of the LED module must be measured at the Tc-Point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.

Radiation of single LED

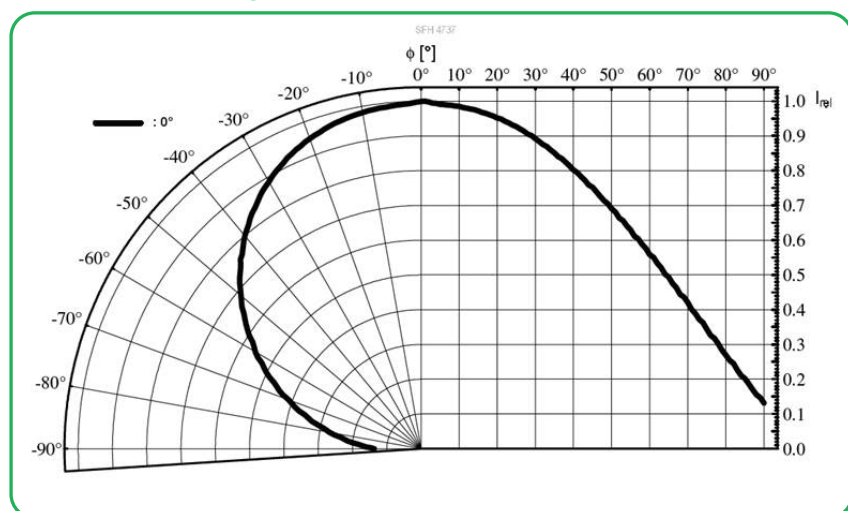

Technical Drawing with Cables (mm)

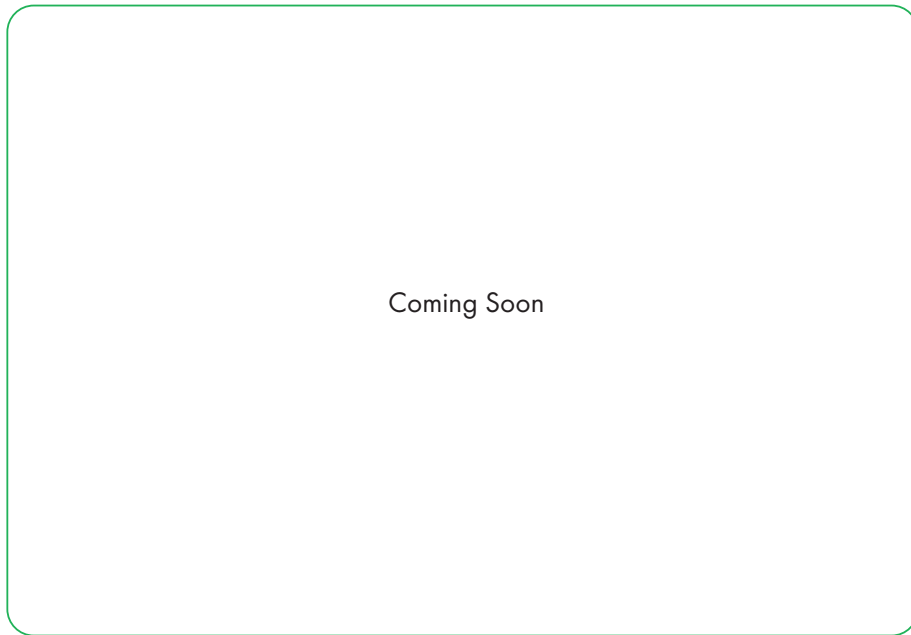

Coming Soon

3D drawing files are available on request from ILS. Please call or email

Lens and Reflector Options

LEDiL precision-engineered Lenses and Reflectors allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR down lights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL Lenses and Reflectors are released alongside the latest product releases from our LED suppliers. You select the best LED for the application; choose LEDiL and you're selecting the best optical solution as well.



Ordering Code	Beam	Diameter	Height	Family	FWHM	Material	Colour	Fastening
FP11001_LISA2-M-PIN	Medium	10mm	6.7mm	LISA 2	20	PMMA +PC	Black	Pin
FP11002_LISA2-W-PIN	Wide	10mm	6.7mm	LISA 2	35	PMMA +PC	Black	Pin
FP11003_LISA2-WW-PIN	Wide	10mm	6.7mm	LISA 2	45	PMMA +PC	Black	Pin
FP11047_LISA2-RS-PIN	Real Spot	10mm	6.7mm	LISA 2	19	PMMA +PC	Black	Pin
FP11081_LISA2-M-CLIP	Medium	10mm	6.7mm	LISA 2	20	PMMA +PC	Black	Clip
FP11082_LISA2-W-CLIP	Wide	10mm	6.7mm	LISA 2	35	PMMA +PC	Black	Clip
FP11083_LISA2-WW-CLIP	Wide	10mm	6.7mm	LISA 2	45	PMMA +PC	Black	Clip
FP11084_LISA2-RS-CLIP	Real Spot	10mm	6.7mm	LISA 2	19	PMMA +PC	Black	Clip
FP11120_LISA2-O-CLIP	Oval	10mm	6.7mm	LISA 2	45x20	PMMA +PC	Black	Clip
FP11124_LISA2-O-PIN	Oval	10mm	6.7mm	LISA 2	45x20	PMMA +PC	Black	Pin
FP11429_LISA2-WWW-PIN	Wide	10mm	6.7mm	LISA 2	80	PMMA +PC	Black	Pin
FP11431_LISA2-WWW-CLIP	Wide	10mm	6.7mm	LISA 2	80	PMMA +PC	Black	Clip
FP11957_LISA2-WWW-PIN	Wide	10mm	6.7mm	LISA 2	80	PMMA +PC	Black	Pin











MicroOLSON Heatsink Options




ILS has a series of Aluminium Alloy Heatsinks to be used with our standard range of MicroOLSONs, PowerClusters and PowerLinear Engines. These Heatsinks are supplied with fixing screws for the light engine and for fixing to a base plate. They also come with Thermal Interface Material (TIM) attached to the top surface. More versions will be introduced over the coming months and we are also happy to manufacture custom Heatsinks to your request

Currently there are no Heatsink options available for the MicroOSLONs.

MicroOLSON Power Supply Options

ILS has a comprehensive range of standard Power Supplies. The table below shows the total number of ILS products each Power Supply can drive. Additional Power Supplies are being introduced so please call us or check our website for the latest offering.

ILS Driver Part No.	Rating (W)	Constant Current Output	Forward Voltage	
IZC035-008F-5065C-SA	8W	350mA	3-36V	
IZC035-017F-0067A-SA	17W	350mA	6-48V	
IZC035-018T-9500A-SX	18W	350mA	15-52V	
IZC050-018T-9500A-SX	18W	500mA	9-36V	
IZC045-040A-9266C-SA	40W	450mA	30-89V	
IZCVAR-040M-9020C-SAL	40W	350mA, 500mA, 600mA, 700mA, 900mA, 1050mA	350mA 2-100V, 500mA 2-80V, 600mA 2-67V, 700mA 2-57V, 900mA 2-45V, 1050mA 2-40V	
OTi-DALI-10/220-240/700-NFC	10W	150-700mA	2.5-45V	
OTE-13/220-240/350-PC	13W	350mA	18-38V	
OT-FIT-15/220-240/500-LT2-LP	15W	150-500mA	15-50V	
OTi-DALI-15/220-240/1A0-LT2	15W	150-1050mA	7.5-54V	

ILS Driver Part No.	Rating (W)	Constant Current Output	Forward Voltage	
OT-20/170-240/800-4DIMLT2-G2-CE	20W	200-1050mA	10-38V	
ELEMENT-ID-20/220-240/500	20W	500mA	21-42	
OT-FIT-30/220-240/700-CS-G2	30W	500-700mA	23-42V	

Thermal Interface Material Options

ILS have produced a range of high-performance, cost effective Thermal Interface Materials to match perfectly their standard products. Our product fills the air pockets between the two surfaces, forming a continuous layer to conduct heat away from the LED to the Heatsink.

Product	Non Adhesive
MicroOLSON	ILA-TIM-MICRO-2A

Other sizes are available, including customised parts

Assembly Information

- The mounting of the MicroOLSON has to be on a metal Heatsink.
- In order to optimise the thermal management, the metal surface needs to be clean (dirt and oil free) and planar for the best contact with the LED module. A thermal grease or heat transfer material is highly recommended.

Safety Information

- The LED module itself and all its components must not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- The mounting of the module is carried out by attaching it at the mounting holes. Metal mounting screws must be insulated with synthetic washers to prevent circuit board damage and possible short circuiting.
- To avoid mechanical damage to the connecting cables, the boards should be attached securely to the intended substrate. Heavy vibration should be avoided.
- Observe correct polarity!
- Depending on the product, incorrect polarity will lead to emission of red or no light. The module can be destroyed!
- Pay attention to standard ESD precautions when installing the MicroOLSON.
- MicroOLSONs, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion.
- Damage by corrosion will not be accepted as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.
- For outdoor usage, a housing is definitely required to protect the board against environmental influences. The design of the housing must correspond to the IP standards in the application. It is also the responsibility of the user to ensure any housings or modifications keep the Tc junction temperature to within stated ranges.
- To also ease the luminaire/installation approval, electronic control gear for LED or LED modules should carry the CE mark and be ENEC certified. In Europe the declarations of conformity must include the following standards: CE: EC 61374-2-13, EN 55015, IEC 61547 and IEC 61000-3-2 - ENEC: 61374-2-13 and IEC/EN 62384.
- The evaluation of eye safety occurs according to the standard IEC 62471:2006 ("photobiological safety of lamps and lamp systems"). Within the risk grouping system of this CIE standard, the LED specified in this data sheet falls into the class "moderate risk" (exposure time 0.25s). Under real circumstances (for exposure time, eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. As is also true when viewing other bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment and even accidents, depending on the situation.

For further information please contact ILS

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.