

Retro-Reflex Sensor

LB66PC7K

Part Number




- Contamination warning
- Glossy objects can be detected
- Integrated output
- Micro-design

Technical Data


Optical Data	
Range	1300 mm
Reference Reflector/Reflector Foil	RQ100BA
Switching Hysteresis	< 15 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Two-Lens Optic	yes
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Switching Frequency	1800 Hz
Response Time	270 μs
Temperature Drift	< 10 %
Temperature Range	-10...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 μA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Housing Material	Stainless Steel
Degree of Protection	IP67
Connection	M8 × 1; 4-pin
Cable Length	20 cm
PNP NO/NC switchable	●
Connection Diagram No.	175
Control Panel No.	B2
Suitable Connection Equipment No.	7
Suitable Mounting Technology No.	200

A reflector must be used in combination with these sensors. They can be installed in all kinds of industrial environments thanks to ample functional reserve. Even reflective objects can be reliably recognized through the use of polarized light.

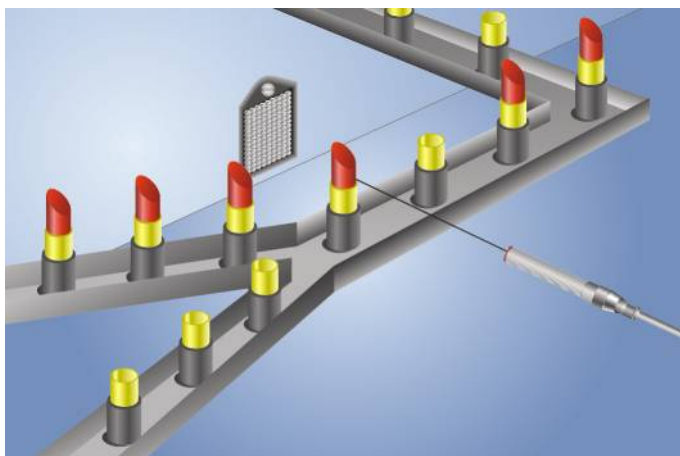


Complementary Products


PNP-NPN Converter BG7V1P-N-2M
Reflector, Reflector Foil

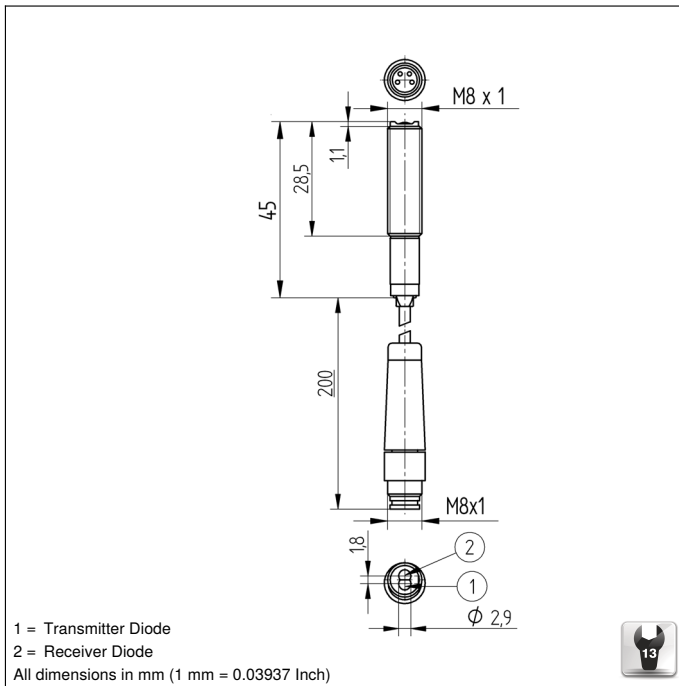

Ctrl. Panel



30 = Switching Status/Contamination Warning

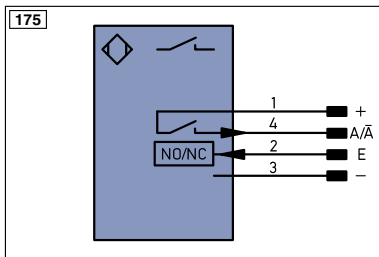

Legend		Legend		Legend	
+	Supply Voltage +	PT	Platinum measuring resistor	EN ^A ES42Z	Encoder A/Ā (TTL)
-	Supply Voltage 0 V	nc	not connected	EN ^B ES42Z	Encoder B/B̄ (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	EN ^A	Encoder A
A	Switching Output (NO)	Ū	Test Input inverted	EN ^B	Encoder B
Ā	Switching Output (NC)	W	Trigger Input	A ^{MIN}	Digital output MIN
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input	A ^{MAX}	Digital output MAX
Ṽ	Contamination/Error Output (NC)	O	Analog Output	A ^{OK}	Digital output OK
E	Input (analog or digital)	O-	Ground for the Analog Output	SY ⁱⁿ	Synchronization In
T	Teach Input	BZ	Block Discharge	SY ^{OUT}	Synchronization OUT
Z	Time Delay (activation)	A ^{WV}	Valve Output	OL ^T	Brightness output
S	Shielding	a	Valve Control Output +	M	Maintenance
RxD	Interface Receive Path	b	Valve Control Output 0 V	rsv	reserved
TxD	Interface Send Path	SY	Synchronization	Wire Colors according to DIN IEC 757	
RDY	Ready	SY-	Ground for the Synchronization	BK	Black
GND	Ground	E+	Receiver-Line	BN	Brown
CL	Clock	S+	Emitter-Line	RD	Red
E/A	Output/Input programmable	±	Grounding	OG	Orange
	IO-Link	S ^{nR}	Switching Distance Reduction	YE	Yellow
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path	GN	Green
IN	Safety Input	Tx+/-	Ethernet Send Path	BU	Blue
OSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
Signal	Signal Output	L ^a	Emitted Light disengageable	GY	Grey
Bl ^{-D} +/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation	WH	White
EN ⁰ ES42Z	Encoder 0-pulse 0-0̄ (TTL)	RES	Input confirmation	PK	Pink
		EDM	Contactor Monitoring	GNVE	Green/Yellow

Table 1

Working Distance	200 mm	500 mm	1000 mm
Light Spot Diameter	35 mm	80 mm	160 mm

Feasible reflector distance

Reflector type, mounting distance

RQ100BA	0,02...1,3 m	RR25_M	0,01...0,4 m
RE18040BA	0,02...1 m	RR25KP	0,01...0,25 m
RQ84BA	0,01...1,1 m	RR21_M	0,01...0,25 m
RR84BA	0,02...1 m	ZRAE02B01	0,02...0,6 m
RE9538BA	0,01...0,6 m	ZRME01B01	0,01...0,2 m
RE6151BM	0...1,1 m	ZRME03B01	0,02...0,6 m
RR50_A	0...0,8 m	ZRMR02K01	0,01...0,25 m
RE6040BA	0,01...0,8 m	ZRMS02_01	0,01...0,3 m
RE8222BA	0,02...0,7 m	RF505	0,02...0,4 m
RR34_M	0,01...0,5 m	RF508	0,03...0,5 m
RE3220BM	0...0,5 m	RF258	0,03...0,4 m
RE6210BM	0,01...0,3 m	ZRDF_K01	0,03...1 m

