## **SIEMENS**

Data sheet 3RA6120-1EP33



SIRIUS, COMPACT STARTER, DIRECT STARTER 400 V, 110 ... 240 V AC/DC, 50 ... 60 HZ, 8 ... 32 A, IP20, CONNECTION MAIN CIRCUIT: PLUGGABLE, WITHOUT TERMINALS, CONNECTION AUXILIARY CIRCUIT: SCREW TERMINAL

product brand name	SIRIUS
Product designation	compact starter
Design of the product	direct starter

General technical data:		
Product function		
<ul> <li>Control circuit interface to parallel wiring</li> </ul>		Yes
Insulation voltage		
Rated value	V	690
maximum permissible voltage for safe isolation		
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	V	250
<ul> <li>between control and auxiliary circuit</li> </ul>	V	300
<ul> <li>between main and auxiliary circuit</li> </ul>	V	400
Degree of pollution		3
Shock resistance		a=60 m/s2 (6g) with 10 ms per 3 shocks in all axes
Vibration resistance		f= 4 5.8 Hz, d= 15 mm; f= 5.8 500 Hz, a= 20 m/s²; 10 cycles
Surge voltage resistance Rated value	V	6 000
Mechanical service life (switching cycles)		
<ul> <li>of the main contacts typical</li> </ul>		10 000 000
<ul> <li>of the auxiliary contacts typical</li> </ul>		10 000 000
<ul> <li>of the signaling contacts typical</li> </ul>		10 000 000
Electrical endurance (switching cycles) of the		
auxiliary contacts		
• at DC-13 at 6 A at 24 V typical		100 000
● at AC-15 at 6 A at 230 V typical		500 000

Electrical endurance (switching cycles) of the signaling contacts	
• at DC-13 at 6 A at 24 V typical	100 000
• at AC-15 at 6 A at 230 V typical	500 000
Type of assignment	continous operation according to IEC 60947-6-2
Protection class IP	IP20
Equipment marking	
• acc. to DIN EN 61346-2	Q

Number of poles for main current circuit  Adjustable response value current of the current- dependent overload release  Formula for making capacity limit current  Formula for interruption capacity limit current  Mechanical power output for 4-pole AC motor  • at 400 V Rated value  • at 500 V Rated value  • at 690 V Rated value  kW	3 8 32 12 x le 10 x le  15 11 11  690
dependent overload release  Formula for making capacity limit current  Formula for interruption capacity limit current  Mechanical power output for 4-pole AC motor  • at 400 V Rated value kW  • at 500 V Rated value kW	12 x le 10 x le  15 11 11
Formula for interruption capacity limit current  Mechanical power output for 4-pole AC motor  • at 400 V Rated value kW  • at 500 V Rated value kW	10 x le  15 11 11 690
Mechanical power output for 4-pole AC motor	15 11 11 690
<ul> <li>at 400 V Rated value</li> <li>at 500 V Rated value</li> <li>kW</li> </ul>	11 11 690
at 500 V Rated value     kW	11 11 690
	11 690
• at 690 V Rated value kW	690
Operating voltage	
• at AC-3 Rated value maximum V	32
Operating current	32
• with AC at 400 V Rated value A	02
● at AC-43	
— at 400 V Rated value A	29
— at 500 V Rated value A	17.6
— at 690 V Rated value A	12.8
Operating power	
• at AC-3	
— at 400 V Rated value kW	15
• at AC-43	
— at 400 V Rated value W	15 000
— at 500 V Rated value W	11 000
— at 690 V Rated value W	11 000
Operating frequency	
• at AC-41 acc. to IEC 60947-6-2 maximum 1/h	750
• at AC-43 acc. to IEC 60947-6-2 maximum 1/h	250
No-load switching frequency 1/h	3 600

Control circuit/ Control:		
Type of voltage		AC
Control supply voltage 1 with AC		
● at 50 Hz	V	110 240
● at 60 Hz	V	110 240

Control supply voltage 1		
• for DC	V	110 240
Rated value	Hz	50
Control supply voltage frequency 2 Rated value	Hz	60
Holding power		
• with AC maximum	W	5.2
• for DC maximum	W	5.8
Auxiliary circuit:		
Number of NC contacts		
<ul> <li>for auxiliary contacts</li> </ul>		1
Number of NO contacts		
<ul> <li>for auxiliary contacts</li> </ul>		1
<ul> <li>of the instantaneous short-circuit release for signaling contact</li> </ul>		1
Number of CO contacts		
<ul> <li>of the current-dependent overload release for signaling contact</li> </ul>		1
Product expansion Auxiliary switch		Yes
Operating current of the auxiliary contacts at AC-12 maximum	Α	10
Operating current of the auxiliary contacts at DC-13		
● at 250 V	Α	0.27
Protective and monitoring functions:		
Trip class		CLASS 10 and 20 adjustable
OFF-delay time	ms	50
Operational short-circuit current breaking capacity (Ics)		
● at 400 V	kA	53
at 500 V Rated value	kA	1
• at 690 V Rated value	kA	1
UL/CSA ratings:		
Full-load current (FLA) for three-phase AC motor		
• at 480 V Rated value	Α	32
yielded mechanical performance [hp]		
• for three-phase AC motor at 200/208 V Rated	metric	7.5
value	hp	
<ul> <li>for three-phase AC motor at 220/230 V Rated value</li> </ul>	metric hp	10
<ul> <li>for three-phase AC motor at 460/480 V Rated value</li> </ul>	metric hp	20
Contact rating of the auxiliary contacts acc. to UL		contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300

Short-circuit:		
Product function Short circuit protection		Yes
Design of short-circuit protection		electromagnetic
Design of the fuse link		
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>		fuse gL/gG: 10 A
<ul> <li>for short-circuit protection of the signaling switch of the short-circuit release required</li> </ul>		6A gL/gG/400V
<ul> <li>for short-circuit protection of the signaling switch of the overload release required</li> </ul>		4A gL/gG/400V
Installation/ mounting/ dimensions:		
mounting position		any
• recommended		vertical, on horizontal standard mounting rail
Mounting type		screw and snap-on mounting
Height	mm	170
Width	mm	45
Depth	mm	165
Connections/ Terminals:		
Type of electrical connection		
• for main current circuit		plug-in without terminals
<ul> <li>for auxiliary and control current circuit</li> </ul>		screw-type terminals
Product function		
<ul> <li>removable terminal for main circuit</li> </ul>		Yes
<ul> <li>removable terminal for auxiliary and control circuit</li> </ul>		Yes
Type of connectable conductor cross-section		
• for main contacts		
— solid		2x (2.5 6 mm²), 1x 10 mm²
<ul> <li>finely stranded with core end processing</li> </ul>		2x (2.5 6 mm²)
for AWG conductors for main contacts		2x (14 10), 1x 8
for auxiliary contacts		
— solid		0.5 4 mm², 2x (0.5 2.5 mm²)
— finely stranded with core end processing		0.5 2.5 mm², 2x (0.5 1.5 mm²)
for AWG conductors for auxiliary contacts		2x (20 14)
Safaty related data:		
Safety related data: B10 value with high demand rate acc. to SN 31920		2 000 000
Proportion of dangerous failures		
• with low demand rate acc. to SN 31920	%	40
with high demand rate acc. to SN 31920	%	50
Failure rate [FIT] with low demand rate acc. to SN 31920	FIT	100

T1 value for proof test interval or service life acc. to		20
IEC 61508	У	20
Protection against electrical shock		finger-safe
•		
Communication/ Protocol:		
Product function Bus communication		No
Product function Control circuit interface with IO link		No
Ambient conditions:		
Installation altitude at height above sea level	m	2 000
maximum		
Ambient temperature		
<ul><li>during operation</li></ul>	°C	-20 +60
during storage	°C	-55 <b>+</b> 80
during transport	°C	-55 <b>+</b> 80
Relative humidity during operation	%	10 90
Electromagnetic compatibility:		
Conducted interference due to burst acc. to IEC		4 kV main contacts, 2 kV auxiliary contacts
61000-4-4		
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		4 kV main contacts, 2 kV auxiliary contacts
Conducted interference due to conductor-earth surge		4 kV main contacts, 2 kV auxiliary contacts 2 kV main contacts, 1 kV auxiliary contacts
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5 Conducted interference due to conductor-conductor		
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5  Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5  Conducted interference due to high-frequency		2 kV main contacts, 1 kV auxiliary contacts
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5  Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5  Conducted interference due to high-frequency radiation acc. to IEC 61000-4-6		2 kV main contacts, 1 kV auxiliary contacts  0.15-80Mhz at 10V
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5  Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5  Conducted interference due to high-frequency radiation acc. to IEC 61000-4-6  Field-bound parasitic coupling acc. to IEC 61000-4-3  Electrostatic discharge acc. to IEC 61000-4-2		2 kV main contacts, 1 kV auxiliary contacts  0.15-80Mhz at 10V  10 V/m
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5  Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5  Conducted interference due to high-frequency radiation acc. to IEC 61000-4-6  Field-bound parasitic coupling acc. to IEC 61000-4-3  Electrostatic discharge acc. to IEC 61000-4-2  Supply voltage:		2 kV main contacts, 1 kV auxiliary contacts  0.15-80Mhz at 10V  10 V/m
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5  Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5  Conducted interference due to high-frequency radiation acc. to IEC 61000-4-6  Field-bound parasitic coupling acc. to IEC 61000-4-3  Electrostatic discharge acc. to IEC 61000-4-2		2 kV main contacts, 1 kV auxiliary contacts  0.15-80Mhz at 10V  10 V/m  8 kV

## **General Product Approval**

**EMC** 

Functional Safety/Safety of Machinery













rest
Certificates

**Shipping Approval** 

Type Test
Certificates/Test
Report











Shipping Approval other

Declaration



Declaration of Conformity

Environmental Confirmations

other

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrymall


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA61201EP33

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3RA61201EP33/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA61201EP33&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA61201EP33&lang=en</a>

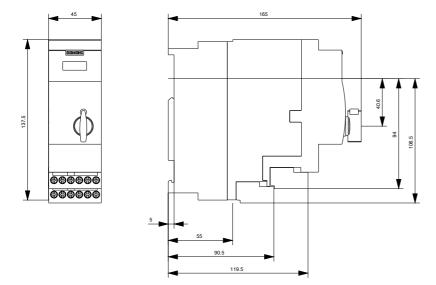

last modified: 11.03.2015