SMART SENSOR BUSINESS

Leuze electronic

the sensor people



Part no.: 50119662 CML720i-R20-310.A/CN-M12 Light curtain receiver



Figure can vary

Contents

- Technical data
- · Dimensioned drawings
- Electrical connection
- · Operation and display
- Suitable transmitters
- Part number code
- Notes
- Accessories

Part no.: 50119662 - CML720i-R20-310.A/CN-M12 - Light curtain receiver

Technical data

Pasia data			
<i>Basic data</i> Series	720		
	Throughbeam principle		
Operating principle			
Device type	Receiver		
Contains	2x BT-NC sliding block		
Application	Object measurement		
Special design			
Special design	Crossed-beam scanning Diagonal-beam scanning Parallel-beam scanning		
Optical data			
Dperating range	Guaranteed operating range		
Dperating range	0.3 7 m		
Dperating range limit	Typical operating range		
Dperating range limit	0.2 9 m		
Measurement field length	310 mm		
Number of beams	16 Piece(s)		
Beam spacing	20 mm		
Measurement data			
Ainimum object diameter	30 mm		
Protective circuit	Polarity reversal protection Short circuit protected Transient protection		
Performance data			
r chonnanoc aata			
Supply voltage UB	18 30 V . DC		
Supply voltage UB	18 30 V , DC		
Residual ripple	0 15 % , From U _B		
	0 15 % , From U _B		
Residual ripple Open-circuit current Inputs/outputs selectable	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver.		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max.	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA		
Residual ripple Open-circuit current <i>Inputs/outputs selectable</i> Output current, max. Input resistance	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max.	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA		
Residual ripple Open-circuit current <i>Inputs/outputs selectable</i> Output current, max. Input resistance	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 ∨ DC high: ≥6V		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 ∨ DC high: ≥6V		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V 1 ms		
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1	0 15 % , From U _B 0 135 mA , The specified values refer to the entire package con sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V		

Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199

Part no.: 50119662 – CML720i-R20-310.A/CN-M12 – Light curtain receiver

Interface	
Туре	CANopen
CANopen	олифен
Function	Process
	1100035
Domise interface	
Service interface	IO-Link
Type IO-Link	10-LIIK
Function	Configuration via software
Function	Service
Connection	
Number of connections	2 Piece(s)
Plug outlet	Axial
Connection 1	
Function	Configuration interface
	Connection to transmitter Signal IN
	Signal OUT
Type of connection	Voltage supply Connector
Thread size	M12
	Male
Type Material	Metal
No. of pins	8 -pin
Encoding Connection 2	A-coded
Function	DUCIN
Function	BUS IN BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded
Mechanical data	
Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 395 mm
Housing material	Metal, Aluminum
Lens cover material	Plastic
Net weight	550 g
Housing color	Silver
Type of fastening	Groove mounting Via optional mounting device
Operation and display	
Type of display	LED
	OLED display
Number of LEDs	2 Piece(s)
Type of configuration	Software Teach-in
Operational controls	Membrane keyboard

Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199 info@leuze.com • www.leuze.com We reserve the right to make technical changes • eng 2019-12-07 3 / 10

Part no.: 50119662 – CML720i-R20-310.A/CN-M12 – Light curtain receiver


Environmental data		
Ambient temperature, operation	-30 60 °C	
Ambient temperature, storage	-40 70 °C	
Certifications		
Degree of protection	IP 65	
Protection class III		
Certifications c CSA US		
Standards applied	IEC 60947-5-2	

90314990
27270910
27270910
EC002549
EC002549

Dimensioned drawings

All dimensions in millimeters

Part no.: 50119662 - CML720i-R20-310.A/CN-M12 - Light curtain receiver

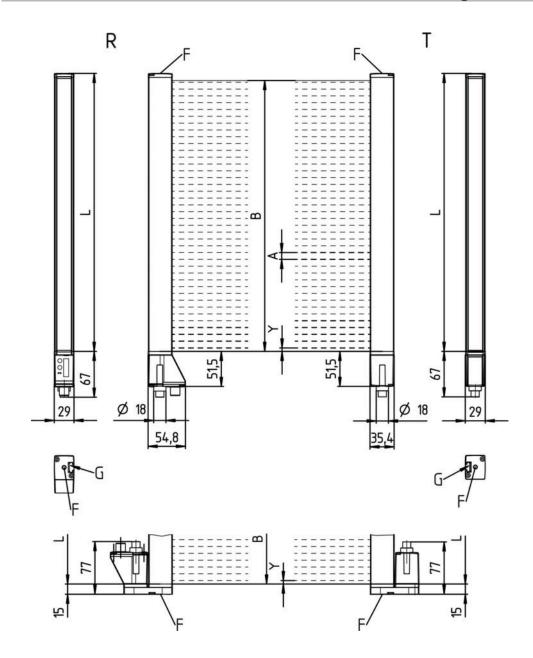


A Beam spacing 20 mm B Measurement field length 310 mm

F M6 thread

- G Fastening groove
- L Profile length 328 mm
- T Transmitter
- R Receiver
- Y 5 mm

Part no.: 50119662 – CML720i-R20-310.A/CN-M12 – Light curtain receiver

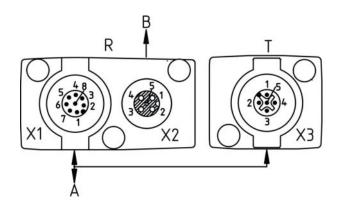

A PWR / SW IN/OUT B BUS IN / OUT

Electrical connection

Connection 1	
Function	Configuration interface Connection to transmitter Signal IN Signal OUT Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded


Pin	Pin assignment
1	V+
2	I/O 1
3	GND
4	IO-Link
5	I/O 2
6	RS 485 Tx-
7	RS 485 Tx+
8	FE/SHIELD



Connection 2		
Function	BUS IN BUS OUT	
Type of connection	Connector	
Thread size	M12	
Туре	Female	
Material	Metal	
No. of pins	5 -pin	
Encoding	A-coded	

Part no.: 50119662 – CML720i-R20-310.A/CN-M12 – Light curtain receiver

Pin	Pin assignment
1	FE/SHIELD
2	n.c.
3	CAN GND
4	CAN H
5	CAN L



Operation and display

LEDs

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
		Measurement frequency display
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

Part no.	Designation	Article	Description
50119424	CML720i- T20-310.A-M12	Light curtain transmitter	Operating range: 0.3 6 m Connection: Connector, M12, Axial, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle: Measuring light curtain	
7XXi	Series: 720i: 720i series 730i: 730i series	
Y	Device type: T: transmitter R: receiver	
ZZ	Beam spacing: 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm	
AAAA	Measurement field length [mm], dependent on beam spacing	
В	Equipment: A: connector outlet, axial R: rear connector outlet	

Part no.: 50119662 - CML720i-R20-310.A/CN-M12 - Light curtain receiver

CCC	Interface: L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment: -PS: Power Setting
EEE	Electrical connection: M12: M12 connector
FFF	-EX: Explosion protection:

Note

A list with all available device types can be found on the Leuze electronic website at www.leuze.com.

Notes

Observe intended use!

- This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

For UL applications:

- For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

Part no.	Designation	Article	Description
50132079	KD U-M12-5A- V1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC

Part no.: 50119662 - CML720i-R20-310.A/CN-M12 - Light curtain receiver

Connection technology - Interconnection cables

Part no.	Designation	Article	Description
50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: IO-Link, DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR
	50118185	K-YCN M12A- M12A-S-PUR	Interconnection cable	Suitable for interface: CANopen Connection 1: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length fork 1: 250 mm Cable length fork 2: 350 mm Sheathing material: PUR

Connection technology - Terminating resistors

Part no.	Designation	Article	Description
50040099	TS 01-5-SA	Terminator plug	Suitable for: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Male, A-coded, 5 -pin Function: Bus termination

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
4 4 4 4	50142900	BT 700M.5-2SET	Mounting device set	Contains: 2x mounting brackets, 1 teach template, 4 M6 x 10 screws Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
ę.	429046	BT-2R1	Mounting bracket set	Contains: 2x BT-R swivel mount, 1 cylinder for mounting on the light curtain Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

Part no.: 50119662 – CML720i-R20-310.A/CN-M12 – Light curtain receiver

Services

Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

Note

A list with all available accessories can be found on the Leuze electronic website in the Download tab of the article detailed page.