

Features

- 1-channel signal conditioner
- 24 V DC supply (loop powered)
- Current input/output 4 mA ... 20 mA
- HART I/P or transmitter power supply
- Low voltage drop
- Line fault detection (LFD)
- Up to SIL2 acc. to IEC 61508

Function

This signal conditioner is loop powered and isolates a 4 mA ... 20 mA signal for transmitters and positioners and is HART compatible.


The low voltage drop of 5 V in comparison to active signal conditioners also allows transmitter applications with unstable power sources between 20 V DC ... 30 V DC.

Line fault detection of the field circuit is possible if the control loop in the safe area is monitored for overscale or underscale conditions of the 4 mA ... 20 mA range.

The module can also be used for controlling solenoid valves and discrete outputs, such as LEDs. In this case, terminals 8- and 9+ are driven with a 24 V signal.


Assembly

Front view

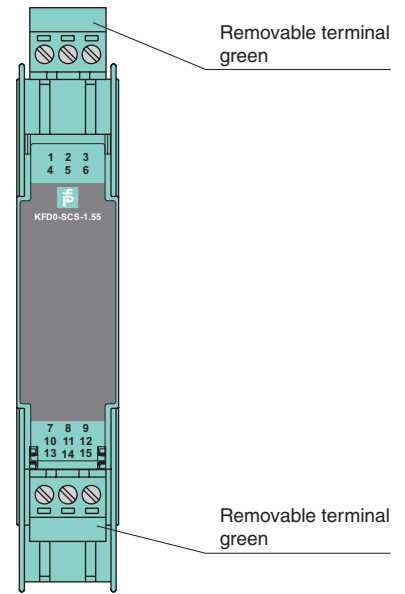

SIL2

Connection

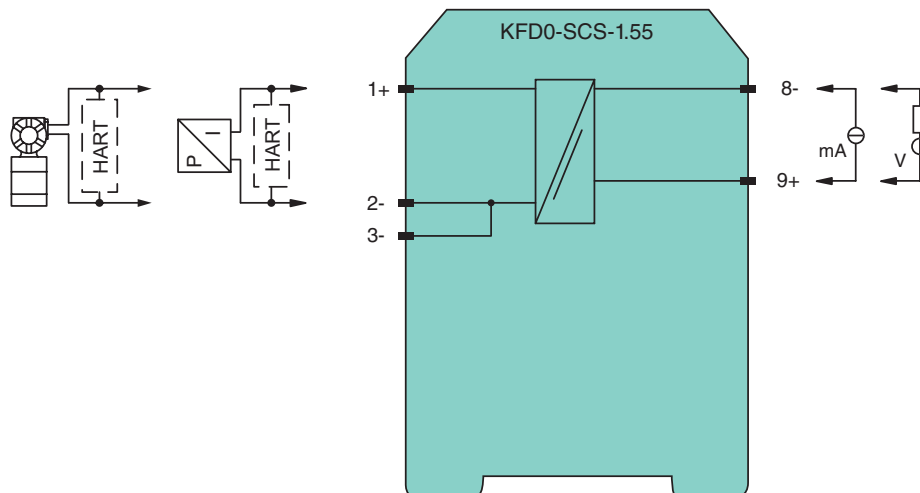

Release date 2013-08-07 17:17 Date of issue 2015-02-16 240494_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

General specifications	
Signal type	Analog output
Supply	
Rated voltage U_n	loop powered
Power loss	0.2 W
Field circuit	
Connection	terminals 1+, 2 / 3-
Voltage	≥ 16 V for supply voltage > 21 V
Current	4 ... 20 mA (linear transmission 1 ... 22 mA)
Load	$\leq 800 \Omega$ (at 20 mA)
Supply circuit	
Connection	terminals 8-, 9+
Voltage	max. 30 V DC
Current	4 ... 20 mA (quiescent current < 0.5 mA)
Power loss	150 mW at 20 mA and $U_E < 24$ V
Transfer characteristics	
Voltage drop	see note
Deviation	
After calibration	$\leq \pm 80 \mu\text{A}$ linearity, load and voltage dependence at 20 °C (68 °F)
Influence of ambient temperature	$< 0.5 \mu\text{A/K}$
Damping	approx. 3 dB
Rise time	$\leq 20 \mu\text{s}$ at 0 Ω , $\leq 600 \mu\text{s}$ with 800 Ω load
Electrical isolation	
Input/Output	basic insulation according to IEC 62103, rated insulation voltage 300 V_{eff}
Directive conformity	
Electromagnetic compatibility	
Directive 2004/108/EC	EN 61326-1:2006
Conformity	
Electrical isolation	IEC 62103:2003
Electromagnetic compatibility	NE 21:2007
Degree of protection	IEC 60529:2001
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications	
Degree of protection	IP20
Mass	approx. 120 g
Dimensions	20 x 124 x 115 mm (0.8 x 4.9 x 4.5 in) , housing type B2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
General information	
Supplementary information	Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Release date 2013-08-07 17:17 Date of issue 2015-02-16 240494_eng.xml


Additional information

In addition, the voltage drop across the resistance (load) of the active measurement input must be considered when calculating the field voltage (terminals 1+ and 2-).

Lead breakage monitoring is possible by means of the reaction of the field current signal to the control side, which means the control system must monitor whether the 4 mA ... 20 mA range was exceeded or fallen short of.


SMART repeater supply isolator for **active** interfaces
Transmitters with or without HART

Voltage drop in case of 20 mA:
max. 5 V

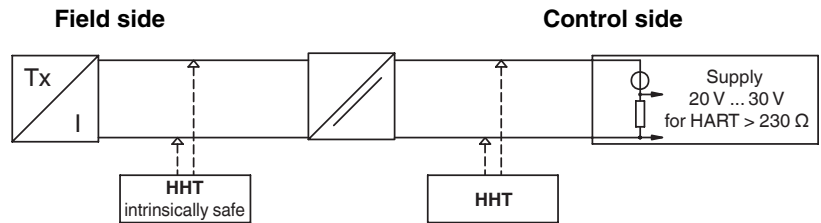


SMART repeater for **passive** interfaces
Transmitters with or without HART

Voltage drop in case of 20 mA:
max. 5 V

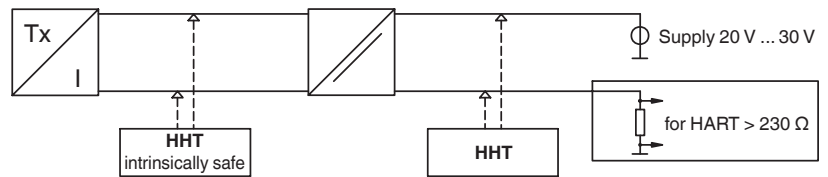

Current driver for positioners, I/P converters
Positioners with or without HART

Voltage drop in case of 20 mA:
5 V, 500 Ω ... 800 Ω load
6 V, 250 Ω load
8 V, 50 Ω load

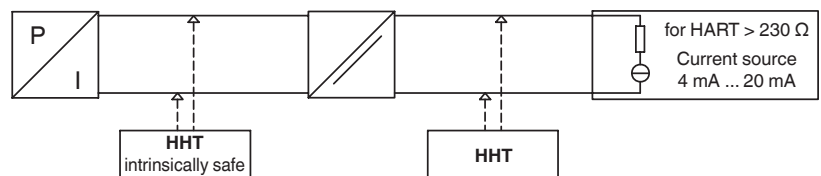

Release date 2013-08-07 17:17 Date of issue 2015-02-16 240494_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".