## **SIEMENS**

## Data sheet

## 3RV2011-1CA25



CIRCUIT-BREAKER SZ S00, FOR MOTOR PROTECTION, CLASS 10, A-REL.1.8...2.5A, N-RELEASE 33A, SPRING-L. CONNECTION, STANDARD SW. CAPACITY W. TRANSVERSE AUX. SWITCH 1NO+1NC

product brand name		SIRIUS
Product designation		3RV2 circuit breaker
General technical data:		
Active power loss total typical	W	6
Insulation voltage		
<ul> <li>with degree of pollution 3 Rated value</li> </ul>	V	690
Shock resistance		
• acc. to IEC 60068-2-27		25g / 11 ms
Surge voltage resistance Rated value	kV	6
Mechanical service life (switching cycles)		
<ul> <li>of the main contacts typical</li> </ul>		100 000
<ul> <li>of the auxiliary contacts typical</li> </ul>		100 000
Electrical endurance (switching cycles)		
• typical		100 000
Temperature compensation	°C	-20 +60
Size of contactor can be combined company-specific		S0
Protection class IP		
• on the front		IP20
• of the terminal		IP20
Type of protection		Increased safety
Equipment marking		
• acc. to DIN EN 81346-2		Q
Main circuit:		
Number of poles for main current circuit		3
		Ŭ

Adjustable response value current of the current- dependent overload release Operating voltage	A	1.8 2.5
Operating voltage		
Rated value	V	690
<ul> <li>at AC-3 Rated value maximum</li> </ul>	V	690
Operating frequency Rated value	Hz	50 60
Operating current Rated value	A	2.5
Operating current		
• at AC-3		
— at 400 V Rated value	A	2.5
Operating power		
• at AC-3		
— at 230 V Rated value	W	370
— at 400 V Rated value	W	750
— at 500 V Rated value	W	1 100
— at 690 V Rated value	W	1 500
Operating frequency		
• at AC-3 maximum	1/h	15
Auxiliary circuit:		
Number of NC contacts		
<ul> <li>for auxiliary contacts</li> </ul>		1
Number of NO contacts		
<ul> <li>for auxiliary contacts</li> </ul>		1
Number of CO contacts		
<ul> <li>for auxiliary contacts</li> </ul>		0
Product expansion Auxiliary switch		Yes
Design of the auxiliary switch		transverse
Operating current of the auxiliary contacts at AC-15		
• at 24 V	А	2
• at 120 V	А	0.5
• at 125 V	А	0.5
• at 230 V	А	0.5
Operating current of the auxiliary contacts at DC-13		
• at 24 V	А	1
• at 60 V	A	0.15
Protective and monitoring functions:		
Trip class		CLASS 10
Design of the overload circuit breaker		thermal
Operational short-circuit current breaking capacity		
(Ics) with AC		
• at 240 V Rated value	kA	100
• at 400 V Rated value	kA	100

• at 500 V Rated value	kA	100
• at 690 V Rated value	kA	10
Maximum short-circuit current breaking capacity (Icu)		
<ul> <li>with AC at 240 V Rated value</li> </ul>	kA	100
<ul> <li>with AC at 400 V Rated value</li> </ul>	kA	100
<ul> <li>with AC at 500 V Rated value</li> </ul>	kA	100
<ul> <li>with AC at 690 V Rated value</li> </ul>	kA	10
Breaking capacity short-circuit current (Icn)		
<ul> <li>with 1 current path for DC at 150 V Rated value</li> </ul>	kA	10
<ul> <li>with 2 current paths in series for DC at 300 V</li> <li>Rated value</li> </ul>	kA	10
<ul> <li>with 3 current paths in series for DC at 450 V</li> <li>Rated value</li> </ul>	kA	10
Response value current of the instantaneous short-	А	33
circuit release		
<b>circuit release</b> JL/CSA ratings:		
JL/CSA ratings:	A	2.5
JL/CSA ratings: Full-load current (FLA) for three-phase AC motor	A A	2.5 2.5
JL/CSA ratings: Full-load current (FLA) for three-phase AC motor • at 480 V Rated value		
JL/CSA ratings: Full-load current (FLA) for three-phase AC motor • at 480 V Rated value • at 600 V Rated value		
JL/CSA ratings: Full-load current (FLA) for three-phase AC motor • at 480 V Rated value • at 600 V Rated value yielded mechanical performance [hp] • for single-phase AC motor at 230 V Rated	A	2.5
JL/CSA ratings: Full-load current (FLA) for three-phase AC motor • at 480 V Rated value • at 600 V Rated value yielded mechanical performance [hp] • for single-phase AC motor at 230 V Rated value • for three-phase AC motor at 200/208 V Rated	A metric hp metric	2.5 0.167
JL/CSA ratings: Full-load current (FLA) for three-phase AC motor • at 480 V Rated value • at 600 V Rated value yielded mechanical performance [hp] • for single-phase AC motor at 230 V Rated value • for three-phase AC motor at 200/208 V Rated value • for three-phase AC motor at 220/230 V Rated	A metric hp metric hp metric	2.5 0.167 0.5
JL/CSA ratings: Full-load current (FLA) for three-phase AC motor • at 480 V Rated value • at 600 V Rated value yielded mechanical performance [hp] • for single-phase AC motor at 230 V Rated value • for three-phase AC motor at 200/208 V Rated value • for three-phase AC motor at 220/230 V Rated value • for three-phase AC motor at 460/480 V Rated	A metric hp metric hp metric hp metric	2.5 0.167 0.5 0.5


Short-circuit:	
Product function Short circuit protection	Yes
Design of the short-circuit trip	magnetic
Design of the fuse link	
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A)
Design of the fuse link for IT network for short-circuit protection of the main circuit	
• at 400 V	gL/gG 25 A
● at 500 V	gL/gG 25 A
● at 690 V	gL/gG 20 A

mounting position		any
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
Height	mm	106
Width	mm	45
Depth	mm	96
Required spacing		
<ul> <li>with side-by-side mounting</li> </ul>		
— forwards	mm	0
— Backwards	mm	0
— upwards	mm	50
— downwards	mm	50
— at the side	mm	0
<ul> <li>for grounded parts</li> </ul>		
— forwards	mm	0
— Backwards	mm	0
— upwards	mm	50
— at the side	mm	30
— downwards	mm	50
• for live parts		
— forwards	mm	0
— Backwards	mm	0
— upwards	mm	50
— downwards	mm	50
— at the side	mm	30

## Connections/ Terminals:

Type of electrical connection	
<ul> <li>for main current circuit</li> </ul>	spring-loaded terminals
<ul> <li>for auxiliary and control current circuit</li> </ul>	spring-loaded terminals
Arrangement of electrical connectors for main current circuit	Top and bottom
Product function	
<ul> <li>removable terminal for auxiliary and control circuit</li> </ul>	No
Type of connectable conductor cross-section	
<ul> <li>for main contacts</li> </ul>	
— single or multi-stranded	2x (0,5 4 mm²)
— finely stranded with core end processing	2x (0.5 2.5 mm²)
<ul> <li>finely stranded without core end processing</li> </ul>	2x (0.5 2.5 mm²)
<ul> <li>for AWG conductors for main contacts</li> </ul>	2x (20 12)

<ul> <li>for auxiliary contacts</li> </ul>		
<ul> <li>— single or multi-stranded</li> </ul>		2x (0,5 2,5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>		2x (0.5 1.5 mm²)
— finely stranded without core end		2x (0.5 1.5 mm²)
processing		
<ul> <li>for AWG conductors for auxiliary contacts</li> </ul>		2x (20 14)
Design of screwdriver shaft		Diameter 5 to 6 mm
Safety related data:		
B10 value with high demand rate acc. to SN 31920	_	50 000
Proportion of dangerous failures	_	
• with low demand rate acc. to SN 31920	%	40
• with high demand rate acc. to SN 31920	%	40
Failure rate [FIT] with low demand rate acc. to SN	FIT	50
31920		
T1 value for proof test interval or service life acc. to	У	10
IEC 61508		
Protection against electrical shock		finger-safe
Mechanical data:		
Size of the circuit-breaker		S00
Ambient conditions:		
Installation altitude at height above sea level	m	2 000
maximum		
Ambient temperature	-	
• during operation	°C	-20 +60
• during storage	°C	-50 +80
<ul> <li>during transport</li> </ul>	°C	-50 +80
Relative humidity during operation	%	10 95
Display:		
Display version		
• for switching status		Handle
Certificates/ approvals:		

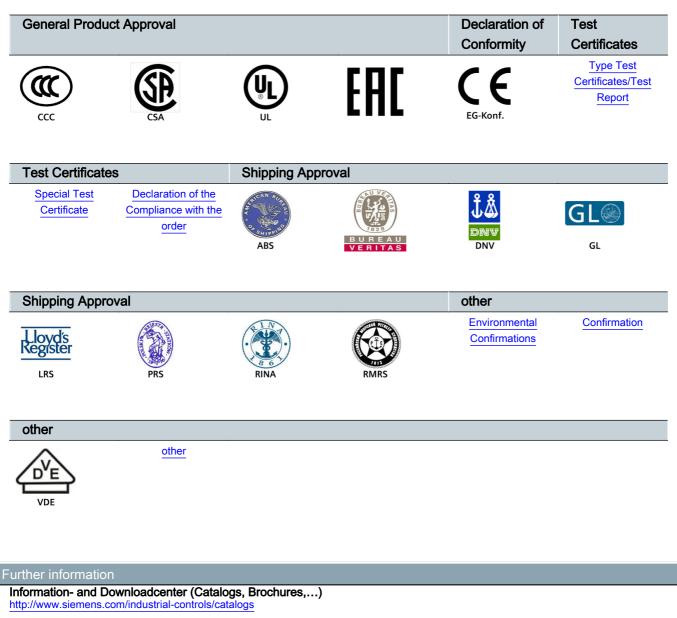


Industry Mall (Online ordering system) http://www.siemens.com/industrymall


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV20111CA25

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RV20111CA25/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV20111CA25&lang=en

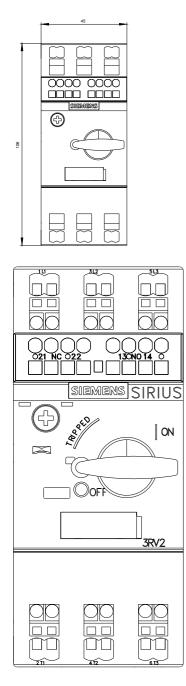



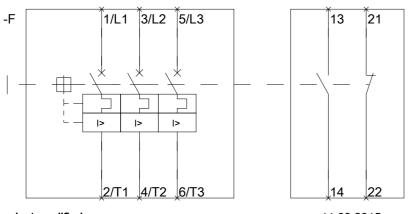

last modified:

11.03.2015