



the sensor people





Figure can vary

Part no.: 50120176 CML720i-R10-2720.R/CV-M12 Light curtain receiver





Contents

- Technical data
- . Dimensioned drawings
- Electrical connection
- · Operation and display
- Suitable transmitters
- · Part number code
- Notes
- Accessories



Technical data

| 720 |
|---|
| |
| Throughbeam principle |
| Receiver |
| Accessories for the use of the BT-2R1 |
| Object measurement |
| |
| Crossed-beam scanning Diagonal-beam scanning Parallel-beam scanning |
| |
| Guaranteed operating range |
| 0.3 7 m |
| Typical operating range |
| 0.2 9 m |
| 2,720 mm |
| 272 Piece(s) |
| 10 mm |
| 10 111111 |
| |
| 20 mm |
| |
| Polarity reversal protection Short circuit protected Transient protection |
| |
| 18 30 V , DC |
| 0 15 % , From U _B |
| 0 435 mA , The specified values refer to the entire package consisting of transmitter and receiver. |
| |
| 2 Piece(s) |
| |
| 0 24 mA |
| 0 11 V |
| |
| Voltage |
| |
| |
| |



| Inputs/outputs selectable Output current, max. | 100 mA | | |
|--|--|--|--|
| Input resistance | 6,000 Ω | | |
| Number of inputs/outputs selectable | | | |
| | 2 Piece(s) | | |
| Type | Inputs/outputs selectable | | |
| Voltage type, outputs | DC | | |
| Switching voltage, outputs | Typ. U _B / 0 V | | |
| Voltage type, inputs | DC | | |
| Switching voltage, inputs | high: ≥6V low: ≤4V | | |
| Input/output 1 | | | |
| Activation/disable delay | 1 ms | | |
| ming | | | |
| eadiness delay | 450 ms | | |
| /cle time | 8.56 ms | | |
| esponse time per beam | 30 µs | | |
| ervice interface | | | |
| pe | IO-Link | | |
| IO-Link | | | |
| Function | Configuration via software Service | | |
| | | | |
| onnection | | | |
| onnection umber of connections | 2 Piece(s) | | |
| umber of connections | 2 Piece(s) Rear side | | |
| umber of connections ug outlet | 2 Piece(s) Rear side | | |
| umber of connections | | | |
| umber of connections ug outlet Connection 1 | Rear side Configuration interface Signal IN Signal OUT | | |
| umber of connections ug outlet Connection 1 Function | Rear side Configuration interface Signal IN Signal OUT Voltage supply | | |
| umber of connections ug outlet Connection 1 Function Type of connection | Rear side Configuration interface Signal IN Signal OUT Voltage supply Connector | | |
| umber of connections ug outlet Connection 1 Function Type of connection Thread size | Configuration interface Signal IN Signal OUT Voltage supply Connector M12 | | |
| umber of connections ug outlet Connection 1 Function Type of connection Thread size Type | Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male | | |
| Type of connection Type Material | Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal | | |
| Type of connection Thread size Type Material No. of pins | Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin | | |
| Type of connection Type Material No. of pins Encoding | Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin | | |
| Type of connection Thread size Type Material No. of pins Encoding Connection 2 | Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin A-coded | | |
| Type of connection Thread size Type Material No. of pins Encoding Connection 2 Function | Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin A-coded Connection to transmitter | | |
| Type of connection Type Material No. of pins Encoding Connection 2 Function | Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin A-coded Connection to transmitter Connector | | |
| Type of connection Type Material No. of pins Encoding Connection 2 Function Type of connection Thread size | Rear side Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin A-coded Connection to transmitter Connector M12 | | |
| Type of connection Type Material No. of pins Encoding Connection 2 Function Type of connection Thread size | Configuration interface Signal IN Signal OUT Voltage supply Connector M12 Male Metal 8 -pin A-coded Connection to transmitter Connector M12 Female | | |



| Lens cover material Plastic | | | |
|--------------------------------|---|--|--|
| Net weight | 2,800 g | | |
| Housing color | Silver | | |
| Type of fastening | Groove mounting Via optional mounting device | | |
| Operation and display | | | |
| Type of display | LED OLED display | | |
| Number of LEDs | 2 Piece(s) | | |
| Type of configuration | Software Teach-in | | |
| Operational controls | Membrane keyboard | | |
| Environmental data | | | |
| Ambient temperature, operation | -30 60 °C | | |
| Ambient temperature, storage | -40 70 °C | | |


| Certifications | | |
|----------------------|---------------|--|
| Degree of protection | IP 65 | |
| Protection class | III | |
| Certifications | c CSA US | |
| Standards applied | IEC 60947-5-2 | |
| | | |

| 90314990 |
|----------|
| 27270910 |
| 27270910 |
| EC002549 |
| EC002549 |
| |


Dimensioned drawings

All dimensions in millimeters



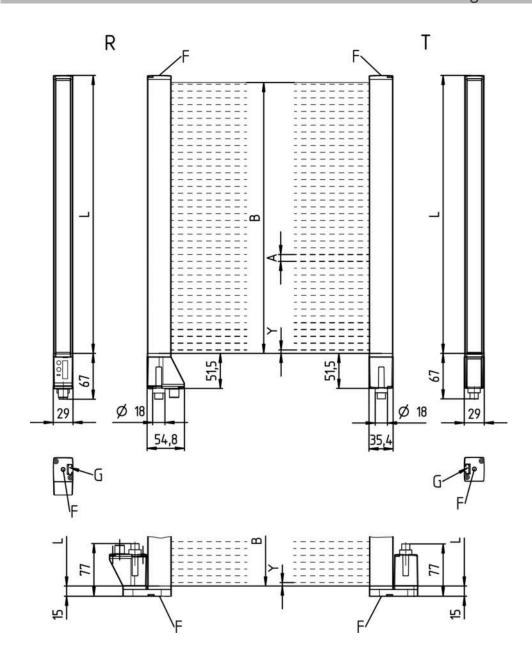

- A Beam spacing 10 mm B Measurement field length 2720 mm
- F M6 thread
- G Fastening groove
- L Profile length 2728 mm
- T Transmitter
- R Receiver
- Y 5 mm

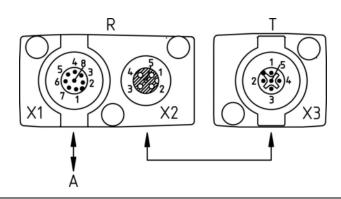




APWR / SW IN/OUT

Electrical connection


| Connection 1 | |
|--------------------|---|
| Function | Configuration interface Signal IN Signal OUT Voltage supply |
| Type of connection | Connector |
| Thread size | M12 |
| Туре | Male |
| Material | Metal |
| No. of pins | 8 -pin |
| Encoding | A-coded |

| Pin | Pin assignment |
|-----|----------------|
| 1 | V+ |
| 2 | I/O 1 |
| 3 | GND |
| 4 | IO-Link |
| 5 | I/O 2 |
| 6 | OUT V |
| 7 | OUT mA |
| 8 | AGND |



| Connection 2 | |
|--------------------|---------------------------|
| Function | Connection to transmitter |
| Type of connection | Connector |
| Thread size | M12 |
| Туре | Female |
| Material | Metal |
| No. of pins | 5 -pin |
| Encoding | A-coded |

| Pin | Pin assignment |
|-----|----------------|
| 1 | FE/SHIELD |
| 2 | V+ |
| 3 | GND |
| 4 | RS 485 Tx+ |
| 5 | RS 485 Tx- |





Operation and display

LEDs

| LED | Display | Meaning |
|-----|--------------------------|--|
| 1 | Green, continuous light | Operational readiness |
| | Green, flashing | Teach / error |
| | | Measurement frequency display |
| 2 | Yellow, continuous light | Light path free, with function reserve |
| | Yellow, flashing | No function reserve |
| | Off | Object detected |

Suitable transmitters

| Part no. | Designation | Article | Description |
|----------|----------------------------|------------------------------|---|
| 50119503 | CML720i- T10-2720.R-M12 | Light curtain transmitter | Operating range: 0.3 6 m Connection: Connector, M12, Rear side, 5 -pin |

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

| CML | Operating principle: Measuring light curtain |
|------|--|
| 7XXi | Series: 720i: 720i series 730i: 730i series |
| Y | Device type: T: transmitter R: receiver |
| ZZ | Beam spacing: 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm |
| AAAA | Measurement field length [mm], dependent on beam spacing |
| В | Equipment: A: connector outlet, axial R: rear connector outlet |
| ccc | Interface: L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus |
| DDD | Special equipment: -PS: Power Setting |
| EEE | Electrical connection: M12: M12 connector |
| FFF | -EX: Explosion protection: |

A list with all available device types can be found on the Leuze electronic website at www.leuze.com.



Notes

Observe intended use!

- · This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- · Only use the product in accordance with its intended use.

For UL applications:

- · For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

| Part no. | Designation | Article | Description |
|----------|------------------------|------------------|--|
| 50135128 | KD S-M12-8A- P1-050 | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR |

Connection technology - Interconnection cables

| Part no. | Designation | Article | Description |
|----------|---------------------------------|-----------------------|---|
| 50129781 | KDS DN-M12-5A- M12-5A-P3-050 | Interconnection cable | Suitable for interface: IO-Link, DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR |

Mounting technology - Mounting brackets

| Part no. | Designation | Article | Description |
|--------------|----------------|---------------------|--|
| 50142900 | BT 700M.5-2SET | Mounting device set | Contains: 2x mounting brackets, 1 teach template, 4 M6 x 10 screws Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel |

Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199



Mounting technology - Swivel mounts

| | Part no. | Designation | Article | Description |
|-----|----------|-------------|----------------------|---|
| EE. | 429046 | BT-2R1 | Mounting bracket set | Contains: 2x BT-R swivel mount, 1 cylinder for mounting on the light curtain Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic |

| | Part no. | Designation | Article | Description |
|-----|----------|---------------------------------|---------|--|
| 166 | 50121098 | SET MD12-US2-IL1.1 + Zub. | | Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20 |

Services

| Part no. | Designation | Article | Description |
|----------|-------------|------------------|---|
| S981001 | CS10-S-110 | Start-up support | Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment. |
| S981005 | CS10-T-110 | Product training | Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure. |

Note

A list with all available accessories can be found on the Leuze electronic website in the Download tab of the article detailed page.