

Glass Fiber-Optic Cable

Through-Beam Mode

113-154-202

Part Number



- A broad range of applications are possible due to the modular system design
- Stock types deliverable at short notice

Technical Data

Optical Data

Fiber Bundle Diameter	1,1 mm
Range with Sensor Type U_87__	600 mm
Range with Sensor Type U_88__	400 mm
Range with Sensor Type U_66__	200 mm
Range with Sensor Type U_55__	100 mm

Opening Angle 68 °

Fiber Step Index

Fiber Diameter 50 μm

Mechanical Data

Temperature Range -25...80 °C

Bending Radius 23 mm

Fiber-Optic Length 0,5 m

Jacket Material PVC

Material End Sleeve Aluminum


End Sleeve No. 54

Light Emission straight

Fiber-Optic Cable Adapter No.

02

Glass fiber optic cables are very flexible and can be used in applications with less space. Especially in applications with hot environment the metal casing fiber optic cables are the answer.

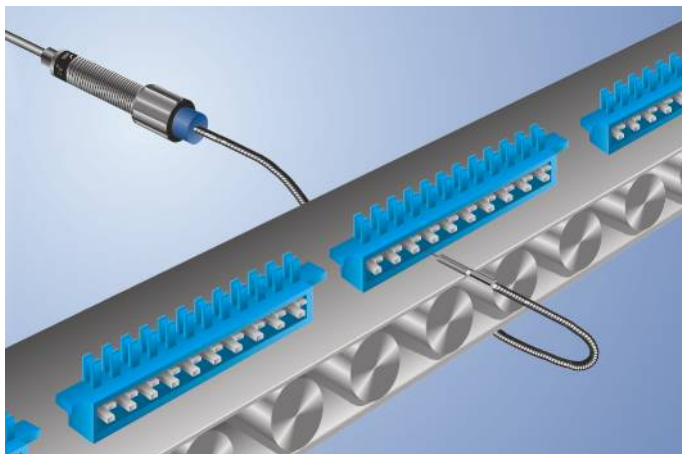

Fiber Optic Cable Combination

Choose your individual Glass Fiber Optic Cable

1 First you have to choose the required range.
If you cannot find a suitable range please change to another Fiber bundle diameter. The range depends on the length of the Fiber optic cable and the switching range of the chosen wenglor sensor.

2 Choose the jacket and the endpoint.

3 Choose the right adapter for your wenglor sensor.

4 Choose the length of the Fiber arm (in 0,25 m steps).

Fiber optic length			
2,0 m	1,5 m	1,0 m	0,5 m
480 mm	510 mm	540 mm	600 mm
320 mm	340 mm	360 mm	400 mm
160 mm	170 mm	180 mm	200 mm
80 mm	85 mm	90 mm	100 mm
360 mm	370 mm	380 mm	400 mm

1	Sensor Type
←	U_ 87 _
←	U_ 88 _
←	U_ 66 _
←	U_ 55 _
←	ODX

