


MK24 Series Reed Sensors

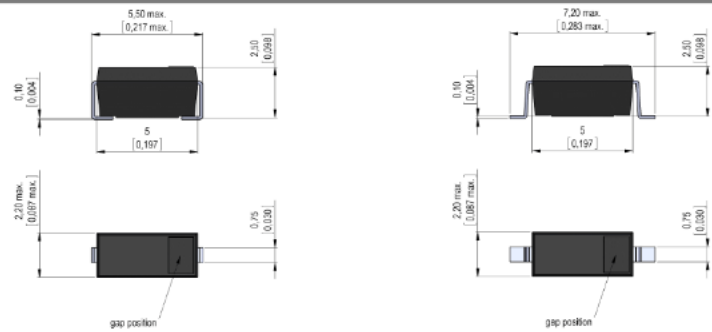

- Features: Supplied in Tape & Reel, J-Lead, Excellent for Low Power Operations
- Applications: On/Off Control Switch, Position Detection, Sabotage Switch, Switching Element & Others
- Markets: Metering, Appliance, Telecommunication, Security, Medical & Others

Part Description: **MK 24-0-X-OE**

Magnetic Sensitivity	Lead Design	Option
B	2, 3	Form B (Normally Closed)
Form A (Normally Open)		

Customer Options	Switch Model	Unit
Contact Data	04	
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	3 / 1*	W
Switching Voltage (max.) DC or peak AC	30	V
Switching Current (max.) DC or peak AC	0.3 / 0.1*	A
Carry Current (max.) DC or peak AC	0.5 / 0.3*	A
Contact Resistance (max.) @ 0.5V & 50mA	200 / 250*	mOhm
Breakdown Voltage (min.) According to EN60255-5	0.1 / 0.06*	kVDC
Operating Time (max.) Incl. Bounce; Measured with w/ Nominal Voltage	0.25	ms
Release Time (max.) Measured with no Coil Excitation	0.15	ms
Insulation Resistance (typ.) Rh<45%, 100V Test Voltage	10 ¹⁰	Ohm
Capacitance (typ.) @ 10kHz across open Switch	0.1	pF


* Valid for Magnetic Sensitivity Range A

Housing and Lead Specifications	
Housing Material	Mineral Filled Epoxy
Case Color	Black
Lead design 1	Flat, straight leads for PCB slot mounting
Lead design 2	Flat, bent SMD leads
Lead design 3	J-Lead

Environmental Data		Unit
Shock Resistance (max.) <small>1/2 sine wave duration 11ms</small>	30	g
Vibration Resistance (max.)	20	g
Operating Temperature	-40 to 130	°C
Storage Temperature	-50 to 130	°C
Soldering Temperature (max.) <small>5 sec. max.</small>	260	°C

Glossary Contact Form		
Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	

Glossary Magnetic Sensitivity							
Sens.	A	B	C	D	E	F	G
AT	05-10	10-15	15-20	20-25	25-30	30-35	35-40

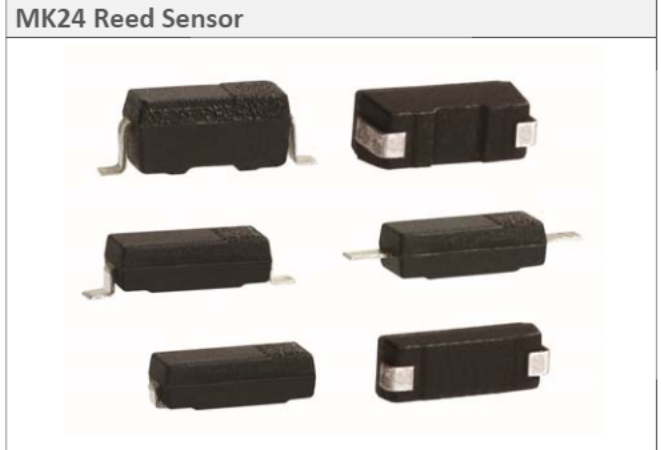

- ### Handling & Assembly Instructions
- Use proper lead clamping or heat sinking techniques to prevent mechanical and/or heat stress during, soldering, and welding
 - Mechanical shock as the result of dropping the reed sensor may cause immediate or post-installation failure
 - Reflow Soldering Conditions according to JEDEC norm J-STD-020D.1

