SIEMENS

Data sheet

3RW30 47-2BB14



SIRIUS SOFT STARTER, SIZE S3, 106A, 55KW/400V, 40 DEGREES, 200-480V AC, 110-230V AC/DC, SPRING-LOADED TERMINALS

product brand name	SIRIUS
Product feature	-
 integrated bypass contact system 	Yes
Thyristors	Yes
Product function	-
 Intrinsic device protection 	No
 motor overload protection 	No
 Evaluation of thermistor motor protection 	No
• External reset	No
 Adjustable current limitation 	No
• inside-delta circuit	No
Product component Motor brake output	No
Equipment marking acc. to DIN EN 61346-2	Q
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	G

Power Electronics:			
	soft starters for standard applications		
А	106		
А	98		
А	90		
	A		

		00.000
— at standard circuit at 40 °C Rated value	W	30 000
• at 400 V		
— at standard circuit at 40 °C Rated value	W	55 000
yielded mechanical performance [hp] for three-phase	metric	30
AC motor at 200/208 V at standard circuit at 50 °C	hp	
Rated value		
Operating frequency Rated value	Hz	50 60
Relative negative tolerance of the operating	%	-10
frequency		
Relative positive tolerance of the operating frequency	%	10
Operating voltage at standard circuit Rated value	V	200 480
Relative negative tolerance of the operating voltage at standard circuit	%	-15
Relative positive tolerance of the operating voltage at standard circuit	%	10
Minimum load in % of I_M	%	10
Continuous operating current in % of I_e at 40 °C	%	115
Active power loss at operating current at 40 °C during operation typical	W	21
Control electronics:		
Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency 1 Rated value	Hz	50
Control supply voltage frequency 2 Rated value	Hz	60
Relative negative tolerance of the control supply voltage frequency	%	-10
Relative positive tolerance of the control supply	%	
voltage frequency		10
	V	10 110 230
voltage frequency	V V	
voltage frequency Control supply voltage 1 with AC at 50 Hz		110 230
voltage frequency Control supply voltage 1 with AC at 50 Hz Control supply voltage 1 with AC at 60 Hz Relative negative tolerance of the control supply	V	110 230 110 230
voltage frequency Control supply voltage 1 with AC at 50 Hz Control supply voltage 1 with AC at 60 Hz Relative negative tolerance of the control supply voltage with AC at 60 Hz Relative positive tolerance of the control supply	V %	110 230 110 230 -15
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 Hz	V %	110 230 110 230 -15 10
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply	V % % V	110 230 110 230 -15 10 110 230
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply	V % % V %	110 230 110 230 -15 10 110 230 -15
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DC	V % % V %	110 230 110 230 -15 10 110 230 -15 10
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCDisplay version for fault signal	V % % V %	110 230 110 230 -15 10 110 230 -15 10
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCDisplay version for fault signalMechanical data:	V % % V %	110 230 110 230 -15 10 110 230 -15 10 red
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCDisplay version for fault signalMechanical data: Size of engine control device	V % V % %	110 230 110 230 -15 10 110 230 -15 10 red S3
voltage frequencyControl supply voltage 1 with AC at 50 HzControl supply voltage 1 with AC at 60 HzRelative negative tolerance of the control supply voltage with AC at 60 HzRelative positive tolerance of the control supply voltage with AC at 60 HzControl supply voltage 1 for DCRelative negative tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCRelative positive tolerance of the control supply voltage for DCDisplay version for fault signalMechanical data: Size of engine control device Width	V % V % %	110 230 110 230 -15 10 110 230 -15 10 red S3 70

Mounting type	-	screw and snap-on mounting	
mounting position		With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° tiltable to the front	
		and back	
Required spacing with side-by-side mounting	-		
• upwards	mm	60	
• at the side	mm	30	
downwards	mm	40	
Installation altitude at height above sea level	m	5 000	
Cable length maximum	m	300	
Number of poles for main current circuit		3	
Connections/ Terminals:			
Type of electrical connection			
 for main current circuit 		screw-type terminals	
 for auxiliary and control current circuit 		spring-loaded terminals	
Number of NC contacts for auxiliary contacts		0	
Number of NO contacts for auxiliary contacts		1	
Number of CO contacts for auxiliary contacts		0	
Type of connectable conductor cross-section for			
main contacts for box terminal using the front			
 clamping point solid 		2x (2.5 16 mm²)	
		2.5 35 mm ²	
 finely stranded with core end processing stranded 		4 70 mm ²	
• stranded Type of connectable conductor cross-section for		4 70 mm	
main contacts for box terminal using the back			
clamping point			
• solid		2x (2.5 16 mm²)	
 finely stranded with core end processing 		2.5 50 mm²	
• stranded		10 70 mm²	
Type of connectable conductor cross-section for			
main contacts for box terminal using both clamping			
points			
• solid		2x (2.5 16 mm²)	
 finely stranded with core end processing 		2x (2.5 35 mm²)	
• stranded		2x (10 50 mm²)	
Type of connectable conductor cross-section for AWG conductors for main contacts for box terminal			
 using the back clamping point 		10 2/0	
 using the front clamping point 		10 2/0	
 using both clamping points 		2x (10 1/0)	
Type of connectable conductor cross-section for DIN			
cable lug for main contacts			

 finely stranded 		2 x (10 50 mm²)	
• stranded		2x (10 70 mm²)	
Type of connectable conductor cross-section for auxiliary contacts			
• solid		2x (0.25 2.5 mm ²)	
 finely stranded with core end processing 		2x (0.25 1.5 mm²)	
Type of connectable conductor cross-section for			
AWG conductors			
 for main contacts 		2x (7 1/0)	
 for auxiliary contacts 		2x (24 14)	
mbient conditions:			
Ambient temperature			
 during operation 	°C	-25 +60	
• during storage	°C	-40 +80	
Derating temperature	°C	40	
Protection class IP		IP00	
ertificates/ approvals:			
General Product Approval		EMC	Test Certificates
			<u>Type Test</u> Certificates/Test <u>Report</u>
		CHEK	
other			
Ourier			

UL/CSA ratings:		
yielded mechanical performance [hp] for three-phase		
AC motor		
● at 220/230 V		
— at standard circuit at 50 °C Rated value	metric	30
	hp	
● at 460/480 V		
— at standard circuit at 50 °C Rated value	metric	75
	hp	
Contact rating of the auxiliary contacts acc. to UL		B300 / R300
Further information		

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) http://www.siemens.com/industrymall


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW30472BB14


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RW30472BB14/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/index.aspx?attID9=3RW30472BB14&lang=en







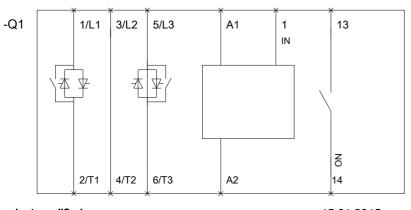

last modified:

15.01.2015