

# Keysight Technologies U1230 Series Handheld Digital Multimeters (DMMs)

Data Sheet





## Introduction

Retool your expectations with the new Keysight Technologies, Inc. U1230 Series Handheld DMMs – the first to combine a built-in LED flashlight, both audible and visual alerts, and non-contact AC voltage detection in one handheld.

Whether it is dark, noisy or even dangerous, the U1230 Series handheld digital multimeters keep you equipped with features that anticipate worst-case scenarios. The ergonomic shaped handheld allows you to single-handedly illuminate the test area with a built-in flashlight while selecting measurement functions using the rotary dial. Vsense performs non-contact voltage detection while continuity detection is made easy with the audible beeper alert and flashing backlight display. With the U1230 Series, you work better in the conditions you are in.

## Features

- Built-in LED flashlight to illuminate test area
- Flashing backlight as additional visual alert during continuity tests in noisy environments
- Vsense to perform non-contact voltage detection
- Data logging capability (stores up to 10 readings)
- IR-to-USB connectivity to transfer data to PC for record

### Ergonomically shaped with a built-in flashlight

Built for handheld users working in a poorly lit environment, the U1230 Series allows you to single-handedly illuminate your test area while making measurements with its easily activated built-in flashlight. Its ergonomic shape fits your hand, while the easily accessible rotary dial allows selection of measurement functions.

### Flashing backlight and beeping alert for continuity detection

The U1230 Series is built for continuity detection in dark and noisy environments. Its audible beep and flashing backlight display provides increased visual and audio alert to indicate continuity.

### Non-contact voltage detection with Vsense

The Vsense, a unique feature found in the U1233A model performs non-contact voltage detection. It delivers more safety while making measurements in dangerous working environments by avoiding any contact with hot or live wires. Upon detection of voltage, it produces a unique combination of beeping alert and blinking LED light to make measurements more efficiently – especially in a dark or noisy environment.

## Take a Closer Look



Figure 1. U1230 Series front view



Figure 2. The built-in flashlight as illustrated

1. Only applicable for the U1233A model

## Overview of Keysight U1230 Series Handheld Digital Multimeters

Key specifications	U1231A	U1232A	U1233A
Display Resolutions	6000	6000	6000
Basic DCV accuracy	0.5% + 2 counts	0.5% + 2 counts	0.5% + 2 counts
Auto/manual ranging	Yes	Yes	Yes
<b>Measurement</b>			
DCV	600 mV to 600 V	600 mV to 600 V	600 mV to 600 V
ACV (RMS)	600 mV to 600 V	600 mV to 600 V	600 mV to 600 V
DCI	No	60 $\mu$ A to 10 A	60 $\mu$ A to 10 A
ACI	No	60 $\mu$ A to 10 A	60 $\mu$ A to 10 A
Resistance	600 $\Omega$ to 60 M $\Omega$	600 $\Omega$ to 60 M $\Omega$	600 $\Omega$ to 60 M $\Omega$
Frequency	99.99 Hz to 99.99 kHz	99.99 Hz to 99.99 kHz	99.99 Hz to 99.99 kHz
Continuity, diode test	Yes	Yes	Yes
Capacitance	1000nF to 10mF	1000nF to 10mF	1000nF to 10mF
Temperature	No	No	40 to 1372 $^{\circ}$ C
Vsense for non-contact voltage detection	No	No	Yes
Zlow - low impedance mode	Yes	Yes	Yes
Connectivity (Adaptor sold separately)	IR-USB / Bluetooth	IR-USB / Bluetooth	IR-USB / Bluetooth
Internal memory for data logging	Yes (10 readings only)	Yes (10 readings only)	Yes (10 readings only)
<b>General</b>			
Built-in flashlight	Yes	Yes	Yes
IP rating	IP 42	IP 42	IP 42
Over-voltage safety protection	CAT III 600V	CAT III 600V	CAT III 600V
Battery life	500 hours	500 hours	500 hours
Warranty	3 years	3 years	3 years

## Electrical Specifications

### DC specifications

Function	Range	Resolution	Accuracy ± (% of reading + counts of least significant digit)	Test current	Burden voltage/ shunt	Input impedance
			U1231A/U1232A/ U1233A	Where (applicable)	Where (applicable)	Where (applicable)
<b>Voltage</b>						
	600 mV <sup>1</sup>	0.1 mV	0.5% + 2	NA	NA	11.18 MΩ
	6 V	0.001 V	0.5% + 2	NA	NA	11.18 MΩ
	60 V	0.01 V	0.5% + 2	NA	NA	10.1 MΩ
	600 V	0.1 V	0.5% + 2	NA	NA	10 MΩ
	600 V (VZ <sub>LOW</sub> ) <sup>2</sup>	0.1 V	2% + 3	NA	NA	3 kΩ
<b>Resistance</b>						
	600 Ω <sup>4</sup>	0.1 Ω	0.9% + 3	0.57 mA	NA	NA
	6 kΩ <sup>4</sup>	0.001 kΩ	0.9% + 3	57 μA	NA	NA
	60 kΩ	0.01 kΩ	0.9% + 3	5.7 μA	NA	NA
	600 kΩ	0.1 kΩ	0.9% + 3	570 nA	NA	NA
	6 MΩ <sup>5</sup>	0.001 MΩ	0.9% + 3	100 nA/10 MΩ	NA	NA
	60 MΩ <sup>5</sup>	0.01 MΩ	1.5% + 3	100 nA/10 MΩ	NA	NA
<b>Diode<sup>3</sup></b>						
	2 V	0.001 V	0.9% + 2	0.57 mA	NA	NA
<b>Current<sup>4</sup></b>						
	60 μA <sup>1</sup>	0.01 μA	1.0% + 2	NA	< 2.5 V/1 kΩ	NA
	600 μA <sup>1</sup>	0.1 μA	1.0% + 2	NA	< 2.5 V/1 kΩ	NA
	6 A <sup>2,5</sup>	0.001 A	1.0% + 3	NA	< 0.2 V/0.005 Ω	NA
	10 A <sup>2,3</sup>	0.01 A	1.0% + 3	NA	< 0.4 V/0.005 Ω	NA

Notes for DC voltage specifications:

1. The accuracy of the 600 mV range is specified after the Null function is used to subtract the thermal effect (by shorting the test leads).
2. For VZ<sub>LOW</sub> (low input impedance) measurements, auto-ranging is disabled and the multimeter's range is set to 600 V in the manual ranging mode.

Notes for resistance specifications:

1. Overload protection: 600 Vrms for short circuits with < 0.3 A current.
2. Maximum open voltage is < +3 V.
3. Built-in buzzer beeps when the resistance measured is less than 23 Ω ± 10 Ω. The multimeter can capture intermittent measurements longer than 1 ms.
4. The accuracy of the 600 Ω to 6 kΩ range is specified after the Null function is used to subtract the test lead resistance and thermal effect (by shorting the test leads).
5. For the ranges of 6 MΩ and 60 MΩ, the RH is specified for < 60%.

Notes for diode specifications:

1. Overload protection: 600 Vrms for short circuits with < 0.3 A current.
2. Built-in buzzer beeps continuously when the voltage measured is less than 50 mV and beeps once for forward-biased diode or semiconductor junctions measured between 0.3 V and 0.8 V (0.3 V ≤ reading ≤ 0.8 V).
3. Open voltage for diode: < +3 V DC.
4. The maximum display for diode measurements is 2100 counts.

Notes for DC current specifications:

1. Overload protection for 60 μA to 600 μA range: 600 Vrms for short circuits with < 0.3 A current.
2. Overload protection for 6 A to 10 A range: 11 A/1000 V; 10 × 38 mm fast-acting fuse.
3. Specification for 10 A range: 10 A continuous. Add 0.3% to the specified accuracy when measuring signals > 10 A to 20 A for 30 seconds maximum. After measuring currents > 10 A, cool down the multimeter for twice the duration of the measured time before proceeding with low current measurements.
4. Only applicable for the U1232A/U1233A model
5. DC current between ± (0.6 mA and 1 mA) is not measurable on the U1232A and U1233A models.

## Electrical Specifications (continued)

### AC specifications

True rms AC voltage and AC current specifications

Function	Range	Resolution	Accuracy ± (% of reading + counts of least significant digit)		Burden voltage/shunt
			45 Hz to 500 Hz	500 Hz to 1 kHz	Where (applicable)
Voltage	600 mV	0.1 mV	1.0% + 3	2.0% + 3	NA
	6 V	0.001 V	1.0% + 3	2.0% + 3	NA
	60 V	0.01 V	1.0% + 3	2.0% + 3	NA
	600 V	0.1 V	1.0% + 3	2.0% + 3	NA
	600 (V <sub>LOW</sub> ) <sup>3</sup>	0.1 V	2.0% + 3	4.0% + 3	NA
Current <sup>1</sup>	60 μA <sup>2</sup>	0.01 μA	1.5% + 3	NA	< 2.5 V/1 kΩ
	600 μA <sup>2</sup>	0.1 μA	1.5% + 3	NA	< 2.5 V/1 kΩ
	6 A <sup>3,5</sup>	0.001 A	1.5% + 3	NA	< 0.2 V/0.005 Ω
	10 A <sup>3,4</sup>	0.01 A	1.5% + 3	NA	< 0.4 V/0.005 Ω

Notes for true rms ac voltage specifications:

1. Overload protection: 600 Vrms. For millivolt measurements, 600 Vrms for short circuits with < 0.3 A current.
2. Input impedance: 10 MΩ (nominal) in parallel with < 100 pF.
3. V<sub>LOW</sub> input impedance: 3 kΩ (nominal).

Notes for ac current specifications:

1. AC current measurement not available for U1231A model.
2. Overload protection for 60 μA to 600 μA range: 600 Vrms for short circuits with < 0.3 A current.
3. Overload protection for 6 A to 10 A range: 11 A/1000 V; 10 × 38 mm fast-acting fuse.
4. Specification for 10 A range: 10 A continuous. Add 0.3% to the specified accuracy when measuring signals > 10 A to 20 A for 30 seconds maximum. After measuring currents > 10 A, cool down the multimeter for twice the duration of the measured time before proceeding with low current measurements.
5. AC current between 0.6 mA and 300 mA is not measurable on the U1232A and U1233A models.

### Capacitance specifications

Range	Resolution	Accuracy ± (% of reading + counts of least significant digit)	
		U1231A/U1232A/U1233A	Measuring rate (at full scale)
1000 nF	1 nF	1.9% + 2	4 times/second
10 μF	0.01 μF	1.9% + 2	4 times/second
100 μF	0.1 μF	1.9% + 2	4 times/second
1000 μF	1 μF	1.9% + 2	1 time/second
10 mF	0.01 mF	1.9% + 2	0.1 time/second

1. Overload protection: 600 Vrms for short circuits with < 0.3 A current.
2. The accuracy of for all ranges is specified based on a film capacitor or better, and after the Null function is used to subtract the test lead resistance and thermal effect (by opening the test leads).
3. The maximum display is 1200 counts.

## Electrical Specifications (continued)

### Temperature specifications

Thermal type	Range	Resolution	Accuracy± (% of reading + counts of least significant digit)
			U1233A
K	-40 °C to 1372 °C	0.1 °C	1% + 1 °C
	-40 °F to 2502 °F	0.1 °F	1% + 1.8 °F

- 1.
2. The specification above is specified after 60 minutes of warm up time. If the unit is exposed during storage in high humidity (condensing) environment, 120 minutes of operating time is required instead.
3. The accuracy does not include the tolerance of the thermocouple probe.
4. Do not allow the temperature sensor to contact a surface that is energized above 30 Vrms or 60 V DC. Such voltages poses a shock hazard.
5. The temperature calculation is specified according to the safety standards of EN/IEC-60548-1 and NIST175.
6. The approximate ambient temperature (cold-junction compensation) is shown on the display when you have an open thermocouple. The open thermocouple message may be due to broken (open) probe or because no probe is installed into the input jacks of the multimeter.
7. For temperature measurement on U1233A, the type-K thermocouple probe and adapter such as the U1186A (purchase separately) is required.
8. For auxillary temperature measurement on U1231A & U1232A, a temperature module such as the U1586B (purchase separately) is required.

### Frequency specifications

Range	Resolution	Accuracy± (% of reading + counts of least significant digit)	Minimum input frequency
		U1231A/U1232A/U1233A	
99.99 Hz	0.01 Hz	0.1% + 2	5 Hz
999.9 Hz	0.1 Hz	0.1% + 2	
9.999 kHz	1 Hz	0.1% + 2	
99.99 kHz	10 Hz	0.1% + 2	

1. Overload protection: 600 V; input signal is < 20,000,000 V × Hz (product of voltage and frequency).



## Electrical Specifications (continued)

### Frequency sensitivity specifications

For voltage measurements

Input range	Minimum sensitivity (rms sine wave)		
	5 Hz to 50 kHz		
Maximum input for specified accuracy <sup>1</sup>	U1231A	U1232A	U1233A
600 mV in Scale mode	50 mV	50 mV	50 mV
600 mV	120 mV	120 mV	120 mV
6 V	0.6 V	0.6 V	0.6 V
60 V	5.0 V	5.0 V	5.0 V
600 V	50 V	50 V	50 V

1. Maximum input for specified accuracy, refer to "AC specifications" on page 106 of the User Guide.

For current measurements

Input range	Minimum sensitivity (rms sine wave)	
	45 Hz to 5 kHz	
Maximum input for specified accuracy <sup>1</sup>	U1232A	U1233A
60 $\mu$ A	30 $\mu$ A	30 $\mu$ A
600 $\mu$ A	30 $\mu$ A	30 $\mu$ A
6 A	0.5 A	0.5 A
10 A	0.5 A	0.5 A

1. Maximum input for specified accuracy, refer to "AC specifications" on page 106 of the User Guide.

### Scale transfer (mV)

Range	Resolution	Accuracy $\pm$ (% of reading + counts of least significant digit)
		U1231A/U1232A/U1233A
DC 600 mV	0.1 mV	0.5% + 2 <sup>2</sup>
AC 600 mV	0.1 mV	1.0 % + 3 @ 45 Hz to 500 Hz
		2.0 % + 3 @ 500 Hz to 1 kHz

1. Overload protection: 600 Vrms for short circuits with < 0.3 A current.
2. The accuracy of the DC 600 mV range is specified after the Null function is used to subtract the thermal effect (by shorting the test leads).
3. Input impedance: 10 M $\Omega$  (typical).

## Electrical Specifications (continued)

### Display update rate (approximate)

Function	Times/second	
	U1231A	U1232A/U1233A
AC V (V or mV)	5	5
DC V (V or mV)	5	5
AC V/DC V ( $V_{Z_{LOW}}$ )	1	1
Scale transfer (mV)	5	5
$\Omega$	5	5
Diode	5	5
Capacitance	4 (< 100 $\mu$ F)	4 (< 100 $\mu$ F)
DC A ( $\mu$ A, mA, or A)	NA	5
AC A ( $\mu$ A, mA, or A)	NA	5
Frequency	1 (> 10 Hz)	1 (> 10 Hz)

## General Specifications

Parameter	U1231A/U1232A/U1233A
Power supply	Battery type <ul style="list-style-type: none"> <li>– 4 × 1.5 V AAA Alkaline battery (ANSI/NEDA 24A or IEC LR03), or</li> <li>– 4 × 1.5 V AAA Zinc Chloride battery (ANSI/NEDA 24D or IEC R03)</li> </ul>
	Battery life <ul style="list-style-type: none"> <li>– 500 hours typical (based on new Alkaline batteries) with backlight and flashlight disabled</li> </ul>
	Low battery indication <ul style="list-style-type: none"> <li>– Low battery indicator will flash when the battery voltage drops below approximately 4.4 V</li> </ul>
Power consumption	450 mVA maximum (with backlight and flashlight enabled)
Fuse	10 × 38 mm 11 A/1000 V fast-acting fuse
Display	Liquid crystal display (LCD) (with maximum reading of 6600 counts)
Flashlight	Cool white LED (5500 K typical); luminous intensity from 2240 mcd to 5600 mcd
Operating environment	<ul style="list-style-type: none"> <li>– Operating temperature from –10 °C to 55 °C, 0% to 80% RH</li> <li>– Full accuracy up to 80% RH for temperatures up to 30 °C, decreasing linearly to 50% RH at 55 °C</li> <li>– Altitude up to 2000 meters</li> <li>– Pollution degree II</li> </ul>
Storage compliance	–40 °C to 60 °C, 0% to 80% RH without batteries
Safety compliance	IEC 61010-1:2010 / EN 61010-1:2010, IEC 61010-2-033:2012 / EN 61010-2-033:2012 Canada: CAN/CSA-C22.2 No.61010-1-12, CAN/CSA-C22.2 No. 61010-2-033-12 USA: ANSI/UL Std. No. 61010-1 (3rd Edition), ANSI/UL Std. No. 61010-2-033 (1st Edition)
Measurement category	CAT III 600 V
Electromagnetic compatibility (EMC)	Commercial limits compliance with EN61326-1 Influence of radiated immunity: In RF electromagnetic fields of 3 V/M  DC voltage measurement typical accuracy: 600 mV, 6 V, 60 V & 600 V range; ± 1.5% of range  DC current measurement typical accuracy: 60 uA & 600uA range; ± 1.2% of range 6 A range; ± 2.0% of range 10 A range; ± 1.1% of range  Note: – If used in close proximity to an RF transmitter or when subjected to continuously present electromagnetic phenomena, some recoverable degradation of performance may occur.
Temperature coefficient	0.1 × (specified accuracy) / °C (from –10 °C to 18 °C, or 28 °C to 55 °C)
Common Mode Rejection Ratio (CMRR)	> 100 dB at DC, 50/60 Hz (1 kΩ unbalanced)

Please take note that for the product, the warranty does not cover:

- Damage from contamination
- Normal wear and tear of mechanical components
- Manuals, fuses, and batteries

### Specification assumptions

- Accuracy is given as ±(% of reading + counts of least significant digit) at 23 °C ± 5 °C, with relative humidity less than 80% RH.
- AC V and AC A specifications are AC coupled, true RMS and are valid from 5% of range to 100% of range.
- The crest factor may be up to 3.0 at full-scale (4000 counts)
- For non-sinusoidal waveforms, add (2% reading + 2% full scale) typical.
- After  $V_{Z_{LOW}}$  (low input impedance) voltage measurements, wait at least 20 minutes for thermal impact to cool before proceeding with any other measurement.

## General Specifications (Continued)

Normal Model Rejection Ration (NMRR)	> 60 dB at 50/60 Hz
Dimensions (H x W x D)	169 mm × 86 mm × 52 mm
Weight	U1232A and U1233A: 371 grams (with batteries and holster) U1231A: 365 grams (with batteries and holster)
Warranty	<ul style="list-style-type: none"> <li>- Three years for product<sup>1</sup></li> <li>- Three months for product's accessories</li> </ul>
Calibration cycle	One year

Please take note that for the product, the warranty does not cover:

- Damage from contamination
- Normal wear and tear of mechanical components
- Manuals, fuses, and batteries

Specification assumptions

- Accuracy is given as  $\pm$ (% of reading + counts of least significant digit) at  $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ , with relative humidity less than 80% RH.
- AC V and AC A specifications are AC coupled, true RMS and are valid from 5% of range to 100% of range.
- The crest factor may be up to 3.0 at full-scale (4000 counts)
- For non-sinusoidal waveforms, add (2% reading + 2% full scale) typical.
- After  $V_{Z_{\text{LOW}}}$  (low input impedance) voltage measurements, wait at least 20 minutes for thermal impact to cool before proceeding with any other measurement.

## Ordering Information



### Standard shipped items

Standard U1231A, U1232A and U1233A include:

- Quick Start Guide
- Certificate of Calibration (CoC)
- U1167A 4 mm Tips probes test leads
- 4 x 1.5 V batteries

### Recommended accessories

U1174A



Soft carrying case

U1168A



Standard test lead kit

U1173A



IR-to-USB cable

U1171A



Magnetic hanging kit

U1186A



Thermocouple (K-Type) and Temperature Probe Adapter

Note: For temperature measurement on the U1233A, a type-K thermocouple probe and adapter such as the U1186A (purchased separately) is recommended. It is only compatible with the U1233A.

U1586B




Temperature Module

Note: For auxillary temperature measurement on the U1231A and U1232A, a temperature module such as the U1586B (purchased separately) is recommended.

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.  
**From Hewlett-Packard to Agilent to Keysight.**

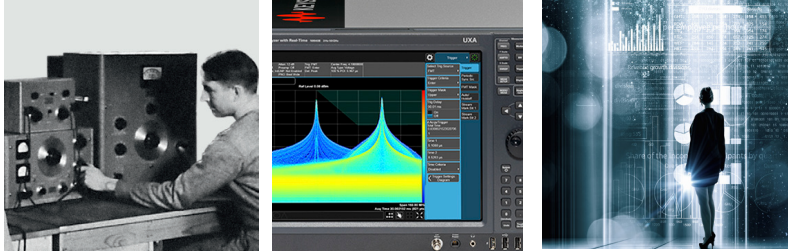

### myKeysight

#### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[http://www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)

Register your products to get up-to-date product information and find warranty information.

### KEYSIGHT SERVICES

*Accelerate Technology Adoption.  
Lower costs.*

#### Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



#### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

#### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/u1230dmm](http://www.keysight.com/find/u1230dmm)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

#### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

#### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-9-7-17)

**DEKRA Certified**  
ISO 9001 Quality Management System

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.  
 DEKRA Certified ISO 9001:2015  
 Quality Management System

