# SIEMENS

## Data sheet

## 3RF23 20-1AA44



SEMI-COND. CONTACTOR 3RF2,1-PH. AC51 20 A 40 DEG. C 48-460 V / 4-30 V DC SCREW CONNECTION

| General technical data:   |    |                        |
|---|----|------------------------|
| product brand name  |    | SIRIUS                 |
| Product designation   |    | solid-state contactor  |
| Product function  |    | zero-point switching   |
| Number of poles for main current circuit                              |    | 1                      |
| Protection class IP   |    | IP20                   |
| Product designation _1 of the accessories that can<br>be ordered      |    | terminal cover         |
| Manufacturer article number _1 of the accessories that can be ordered |    | <u>3RF2900-3PA88</u>   |
| Product designation _3 of the accessories that can<br>be ordered      |    | converter              |
| Manufacturer article number _3 of the accessories that can be ordered |    | <u>3RF2900-0EA18</u>   |
| Product designation _4 of the accessories that can<br>be ordered      |    | load monitoring        |
| Manufacturer article number _4 of the accessories that can be ordered |    | 3RF2920-0GA16          |
| Product designation _5 of the accessories that can<br>be ordered      |    | load monitoring, basis |
| Manufacturer article number _5 of the accessories that can be ordered |    | <u>3RF2920-0FA08</u>   |
| Ambient temperature   |    |                        |
| <ul> <li>during operation</li> </ul>                                  | °C | -25 +60                |
| • during storage  | °C | -55 +80                |
| Installation altitude at height above sea level                       | m  | 1 000                  |
| maximum   |    |                        |

| Vibration resistance acc. to IEC 60068-2-6  | _    | 2g          |
|---|------|-------------|
| Shock resistance acc. to IEC 60068-2-27   | _    | 15g / 11 ms |
| Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 |      | К           |
| Equipment marking acc. to DIN EN 61346-2  |      | Q           |
| Number of NC contacts for auxiliary contacts  |      | 0           |
| Number of NO contacts for auxiliary contacts  |      | 0           |
| Number of CO contacts for auxiliary contacts  |      | 0           |
| Main circuit:   |      |             |
| Number of NO contacts for main contacts   |      | 1           |
| Number of NC contacts for main contacts   | _    | 0           |
| Operating current   |      |             |
| at AC-1 at 400 V Rated value  | А    | 20          |
| • at AC-51 Rated value  | А    | 20          |
| Operating current minimum   | mA   | 500         |
| Operating voltage with AC   |      |             |
| • at 50 Hz Rated value  | V    | 48 460      |
| at 60 Hz Rated value  | V    | 48 460      |
| Operating range relative to the operating voltage with                              |      |             |
| AC  |      |             |
| • at 50 Hz  | V    | 40 506      |
| • at 60 Hz  | V    | 40 506      |
| Operating frequency Rated value   | Hz   | 50 60       |
| Insulation voltage Rated value  | V    | 600         |
| Rate of voltage rise at the thyristor for main contacts maximum permissible         | V/µs | 1 000       |
| Blocking voltage at the thyristor for main contacts maximum permissible             | V    | 1 200       |
| Reverse current of the thyristor  | mA   | 10          |
| Derating temperature  | °C   | 40          |
| Active power loss total typical   | W    | 20          |
| Surge current resistance Rated value  | А    | 600         |
| I2t value maximum   | A²∙s | 1 800       |
| Control circuit/ Control:   |      |             |
| Type of voltage of the control supply voltage                                       |      | DC          |
| Control supply voltage 1  |      |             |
| • for DC  |      |             |
| — Initial rated value   | V    | 4           |
| — Final rated value   | V    | 30          |
| Control supply voltage  |      |             |
| <ul> <li>for DC Full-scale value for signal&lt;0&gt;<br/>recognition</li> </ul>     | V    | 1           |
| Control current   |      |             |

| • for DC Rated value | mA | 20 |
|----------------------|----|----|
|                      |    |    |

| Installation/ mounting/ dimensions:                             |     |  |  |  |  |
|---|-----|--|--|--|--|
| Mounting type   |     | screw and snap-on mounting onto 35 mm standard mounting rail |  |  |  |
| Mounting type Side-by-side mounting                             |     | Yes  |  |  |  |
| Design of the thread of the screw for securing the<br>equipment |     | M4   |  |  |  |
| Tightening torque of the screw for securing the<br>equipment    | N∙m | 1.5  |  |  |  |
| Width   | mm  | 22.5   |  |  |  |
| Height  | mm  | 100  |  |  |  |
| Depth   | mm  | 140.5  |  |  |  |

| Type of electrical connection for main current circuitscrew-type terminalsDesign of the thread of the connection screw for main<br>contactsM4Tightening torque for main contacts with screw-type<br>terminalsN·m2 2.5Tightening torque [lbf-in] for main contacts with<br>screw-type terminalslbf-in18 22Type of connectable conductor cross-section for<br>main contacts2x (1.5 2.5 mm²), 2x (2.5 6 mm²)• solid2x (1.5 2.5 mm²), 2x (2.5 6 mm²)• finely stranded<br>— with core end processing2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²Type of connectable conductor cross-section for<br>main contacts2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²• for AWG conductors<br>— for main contacts2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²• for auxiliary and control contacts2x (14 10)- for auxiliary and control contacts1x (AWG 20 12)Type of connectable conductor cross-section for<br>auxiliary and control contacts1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• solid1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• without core end processing1x (0.5   | nections/ Terminals:                                   |        |   |
|---|--|--------|---|
| contactsN·m2 2.5Tightening torque for main contacts with screw-type<br>terminalsIbf-in18 22Tightening torque [lbf-in] for main contacts with<br>screw-type terminalsIbf-in18 22Type of connectable conductor cross-section for<br>main contacts2x (1.5 2.5 mm²), 2x (2.5 6 mm²)• solid2x (1.15 2.5 mm²), 2x (2.5 6 mm²)• finely stranded2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²Type of connectable conductor cross-section<br>• for AWG conductors2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²• for AWG conductors2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²• for auxiliary and control contacts2x (1 4 10)<br>1x (AWG 20 12)• solid1x (AWG 20 12)• solid1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• finely stranded1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  | e of electrical connection for main current circuit    |        | screw-type terminals                      |
| terminalsIbf-in18 22Tightening torque [lbf-in] for main contacts with<br>screw-type terminalsIbf-in18 22Type of connectable conductor cross-section for<br>main contacts2x (1.5 2.5 mm²), 2x (2.5 6 mm²)• solid2x (1 2.5 mm²), 2x (2.5 6 mm²)• finely stranded<br>— with core end processing2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²Type of connectable conductor cross-section<br>• for AWG conductors<br>— for main contacts2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²Type of connectable conductor cross-section<br>• for AWG conductors<br>— for auxiliary and control contacts2x (14 10)<br>1x (AWG 20 12)Type of connectable conductor cross-section for<br>auxiliary and control contacts1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• solid<br>• solid1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• with core end processing<br>— without core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• without core end processing<br>— without core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)   | -  |        | M4  |
| screw-type terminalsType of connectable conductor cross-section for<br>main contacts• solid2x (1.5 2.5 mm²), 2x (2.5 6 mm²)• finely stranded2x (1 2.5 mm²), 2x (2.5 6 mm²)- with core end processing2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²Type of connectable conductor cross-section2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²• for AWG conductors2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²- for main contacts2x (14 10)- for main contacts1x (AWG 20 12)Type of connectable conductor cross-section for<br>auxiliary and control contacts1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• solid1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• finely stranded1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- without core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  |  | N∙m    | 2 2.5                                     |
| main contactsImage: solidImage: solid• solid2x (1.5 2.5 mm²), 2x (2.5 6 mm²)• finely stranded2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²- with core end processing2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²• for AWG conductor cross-section2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²• for AWG conductors2x (14 10)- for main contacts2x (14 10)- for auxiliary and control contacts1x (AWG 20 12)Type of connectable conductor cross-section for<br>auxiliary and control contacts1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• solid1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• finely stranded1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- without core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  |  | lbf∙in | 18 22                                     |
| • finely strandedImage: constraint of the strand of the stran |  | _      |   |
| - with core end processing2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²Type of connectable conductor cross-section6• for AWG conductors2x (14 10)- for main contacts2x (14 10)- for auxiliary and control contacts1x (AWG 20 12)Type of connectable conductor cross-section for<br>auxiliary and control contacts1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• solid1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- without core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)   | • solid  |        | 2x (1.5 2.5 mm²), 2x (2.5 6 mm²)          |
| Type of connectable conductor cross-sectionImage: conductor cross-section• for AWG conductors2x (14 10)- for main contacts2x (14 10)- for auxiliary and control contacts1x (AWG 20 12)Type of connectable conductor cross-section for<br>auxiliary and control contacts1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• solid1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• finely stranded1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- without core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  | <ul> <li>finely stranded</li> </ul>                    |        |   |
| <ul> <li>for AWG conductors         <ul> <li>for main contacts</li> <li>for main contacts</li> <li>for auxiliary and control contacts</li> </ul> </li> <li>Type of connectable conductor cross-section for auxiliary and control contacts</li> <li>solid         <ul> <li>solid</li> <li>finely stranded</li> <li>with core end processing</li> <li>without core end processing</li> <li>without core end processing</li> <li>tx (0.5 2.5 mm<sup>2</sup>), 2x (0.5 1.0 mm<sup>2</sup>)</li> </ul> </li> </ul>   | — with core end processing                             |        | 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² |
| for main contacts2x (14 10) for auxiliary and control contacts1x (AWG 20 12)Type of connectable conductor cross-section for<br>auxiliary and control contacts1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• solid1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• finely stranded1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- without core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  | e of connectable conductor cross-section               | _      |   |
| - for auxiliary and control contacts1x (AWG 20 12)Type of connectable conductor cross-section for<br>auxiliary and control contacts1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• solid1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• finely stranded1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- without core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  | <ul> <li>for AWG conductors</li> </ul>                 |        |   |
| Type of connectable conductor cross-section for<br>auxiliary and control contacts1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• solid1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)• finely stranded1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- with core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)- without core end processing1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  | — for main contacts                                    |        | 2x (14 10)                                |
| auxiliary and control contacts       Image: solid       1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)         • solid       1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)         • finely stranded       1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)         — with core end processing       1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)         — without core end processing       1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)   | - for auxiliary and control contacts                   |        | 1x (AWG 20 12)                            |
| <ul> <li>finely stranded         <ul> <li>with core end processing</li> <li>without core end processing</li> <li>1x (0.5 2.5 mm<sup>2</sup>), 2x (0.5 1.0 mm<sup>2</sup>)</li> <li>1x (0.5 2.5 mm<sup>2</sup>), 2x (0.5 1.0 mm<sup>2</sup>)</li> </ul> </li> </ul>  |  | -      |   |
| with core end processing       1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)         without core end processing       1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  | • solid  |        | 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)        |
| - without core end processing 1x (0.5 2.5 mm <sup>2</sup> ), 2x (0.5 1.0 mm <sup>2</sup> )  | <ul> <li>finely stranded</li> </ul>                    |        |   |
|   | — with core end processing                             |        | 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)        |
| Connectable conductor cross-section   | — without core end processing                          |        | 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)        |
|   | nectable conductor cross-section                       | _      |   |
| • for main contacts   | • for main contacts                                    |        |   |
| — single or multi-stranded mm <sup>2</sup> 1.5 6  | — single or multi-stranded                             | mm²    | 1.5 6                                     |
| — finely stranded   | — finely stranded                                      |        |   |
| - with core end processing mm <sup>2</sup> 1 10   | - with core end processing                             | mm²    | 1 10                                      |
| for auxiliary and control contacts  | <ul> <li>for auxiliary and control contacts</li> </ul> |        |   |
| — solid mm <sup>2</sup> 0.5 2.5   | — solid  | mm²    | 0.5 2.5                                   |
| — finely stranded   | — finely stranded                                      |        |   |

| — with core end processing   | mm²    | 0.5 2.5              |
|--|--------|----------------------|
| - without core end processing  | mm²    | 0.5 2.5              |
| AWG number as coded connectable conductor cross section for main contacts                  |        | 10 14                |
| Type of electrical connection for auxiliary and control<br>current circuit                 |        | screw-type terminals |
| Design of the thread of the connection screw of the<br>auxiliary and control contacts      |        | M3                   |
| AWG number as coded connectable conductor cross section for auxiliary and control contacts |        | 20 12                |
| Wire stripping length of the cable   |        |                      |
| <ul> <li>for main contacts</li> </ul>  | mm     | 7                    |
| <ul> <li>for auxiliary and control contacts</li> </ul>                                     | mm     | 7                    |
| Tightening torque for auxiliary and control contacts with screw-type terminals             | N∙m    | 0.5 0.6              |
| Tightening torque [lbf·in] for auxiliary and control contacts with screw-type terminals    | lbf∙in | 4.5 5.3              |
|  |        |                      |

| Certificates/ app | provals:      |        |                |                                |                             |
|-------------------|---------------|--------|----------------|--------------------------------|-----------------------------|
| General Pro       | duct Approval | EMC    | Declaration of | Test Certificates              |                             |
|                   |               |        | Conformity     |                                |                             |
| ա                 | 50 <b>7</b>   | C      | CE             | Type Test<br>Certificates/Test | Special Test<br>Certificate |
| UL                | LIIL          | C-TICK | EG-Konf.       | <u>Report</u>                  |                             |

| other         |  |  |  |
|---------------|--|--|--|
| Environmental |  |  |  |
| Confirmations |  |  |  |

#### Further information

Short-circuit protection, design of the fuse link https://www.automation.siemens.com/cd-static/material/info/3RF23\_eng.pdf

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) http://www.siemens.com/industrymall

#### Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF23201AA44

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RF23201AA44/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF23201AA44&lang=en

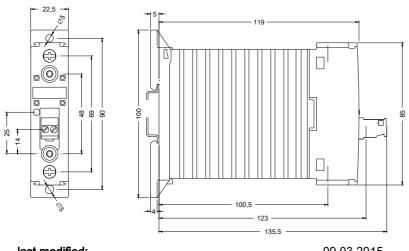

last modified:

09.03.2015