

San Ace 80 ^{9HVA type} High Static Pressure Fan

Features

High Static Pressure

The maximum static pressure increased by approximately 35% compared with our conventional DC fan, while maintaining equivalent maximum airflow performance.*

It is an ideal cooling solution especially for densely-packed equipment.

Suitable for 2U Devices

Measuring 80 mm square, this new fan is ideal for 2U sized equipment.

*: Our conventional DC fan is 80 x 80 x 38 mm "San Ace 80" 9HV type, Model No. 9HV0812P1G001.



80×80×38 mm

Specifications

The following nos. have **PWM controls, pulse sensors**. For ribless, append "1" to the model no.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle (Note 1,2) [%]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m ³ /min] [CFM]	Max. static pressure [Pa] [inchHzO]	SPL [dB(A)]	Operating temperature [°C]	Expected life [h]
9HVA0812P1G001	12	10.8 to 13.2	100	3.5	42	16,100	3.75 132	1,350 5.4	73	-20 to +70	40,000 / 60°C (70,000 / 40°C)
			20	0.2	2.4	4,200	0.96 33.9	105 0.42	44		

Note1: PWM frequency: 25 kHz Note2: Fan does not rotate when PWM duty cycle is 0%.


Available options: **Without Sensor**

Common Specifications


- Material Frame, Impeller: Plastics (Flammability: UL94V-0)
- Expected life Refer to specifications
(L10: Survival rate: 90% at 60°C, rated voltage, and continuously run in a free air state)
- Motor protection system Current blocking function and reverse polarity protection
- Dielectric strength 50 / 60 Hz, 500 VAC, 1 minute (between lead conductor and frame)
- Sound pressure level (SPL) Expressed as the value at 1 m from air inlet side
- Operating temperature Refer to specifications (Non-condensing)
- Storage temperature -30°C to +70°C (Non-condensing)
- Lead wire ⊕ Red ⊖ Black Sensor: Yellow Control: Brown
- Mass 220 g

Airflow - Static Pressure Characteristics

• PWM duty cycle

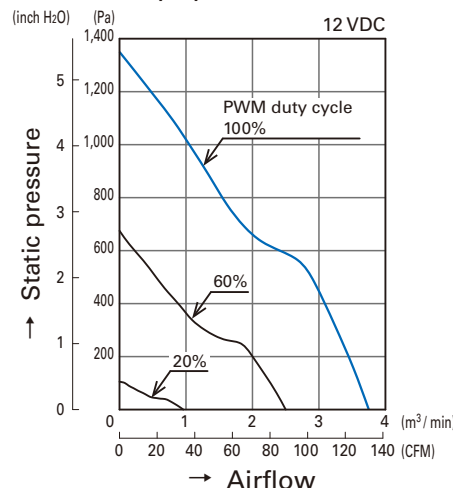


• Operating voltage range

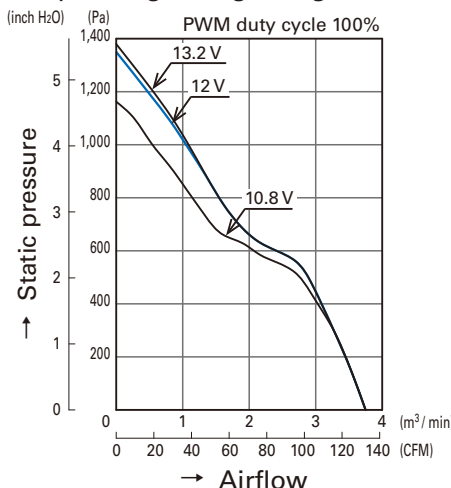


PWM Duty

- Speed Characteristics Example

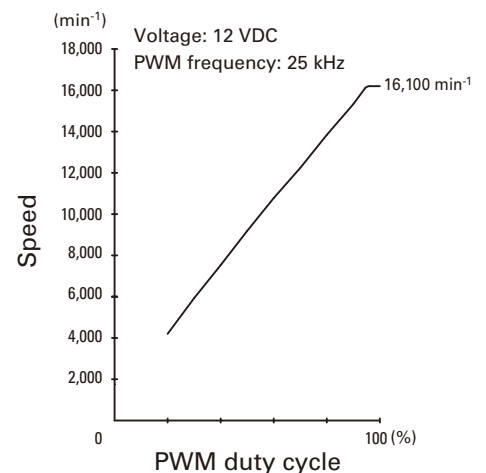

PWM Input Signal Example


Input signal waveform

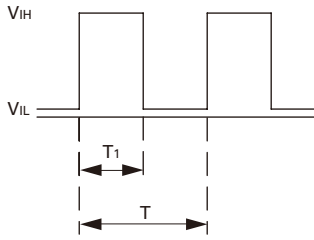

$V_{IH}=4.75\text{ V to }5.25\text{ V}$
 $V_{IL}=0\text{ V to }0.4\text{ V}$
 PWM duty cycle (%) = $\frac{T_1}{T} \times 100$
 PWM frequency 25 (kHz) = $\frac{1}{T}$
 Source current (I_{source}): 1 mA max. at control voltage 0 V
 Sink current (I_{sink}): 1 mA max. at control voltage 5.25 V
 Control terminal voltage: 5.25 V max. (Open circuit)

When the control lead wire is open, the fan speed is the same as the one at a PWM duty cycle of 100%.
 Either TTL input, open collector or open drain can be used for PWM control input signal.


Example of Connection Schematic

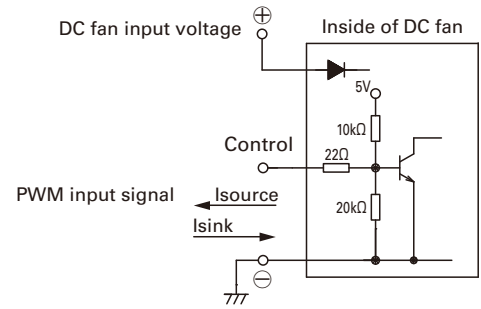


Specifications for Pulse Sensors

Output circuit: Open collector

Output waveform (Need pull-up resistor)

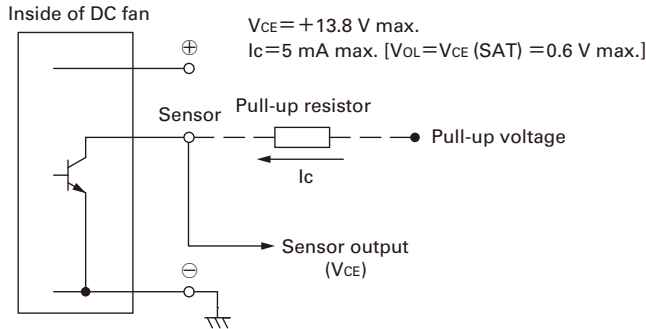


In case of steady running

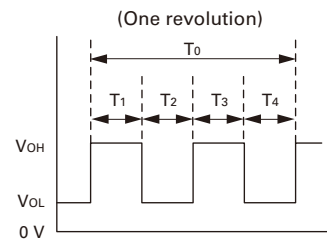


$T_{1\text{ to }4} \doteq (1/4) T_0$
 $T_{1\text{ to }4} \doteq (1/4) T_0 = 60/4N \text{ (sec)}$
 $N = \text{Fan speed (min}^{-1}\text{)}$

Dimensions (unit: mm) (with ribs)

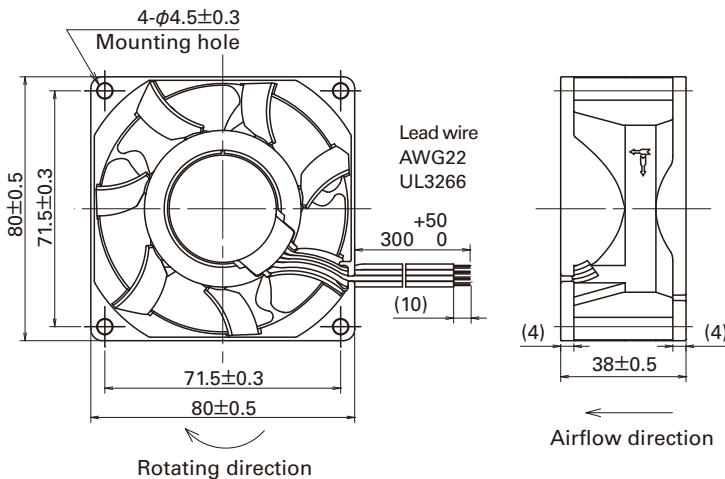

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

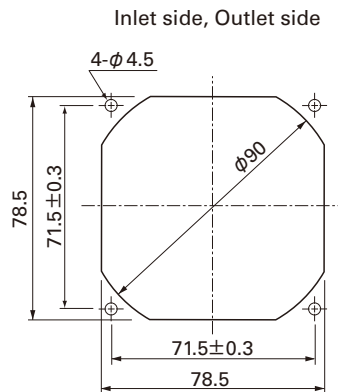

Notice

- Please read the "Safety Precautions" on our website before using the product.
- The products shown in this catalog are subject to Japanese Export Control Law. Diversion contrary to the law of exporting country is prohibited.
- For protecting fan bearings against electrolytic corrosion near strong electromagnetic noise sources, we provide effective countermeasures such as Electrolytic Corrosion Proof Fans and EMC guards. Contact us for details.

SANYO DENKI CO., LTD. 3-33-1 Minami-Otsuka, Toshima-ku, Tokyo, 170-8451, Japan TEL: +81 3 5927 1020

<http://www.sanyodenki.com>

The names of companies and/or their products specified in this catalog are the trade names, and/or trademarks and/or registered trademarks of such respective companies.

"San Ace" is a trademark of SANYO DENKI CO., LTD.

Specifications are subject to change without notice.

CATALOG No. C1058B002 '16.3