

## IIoT Product Change Notice

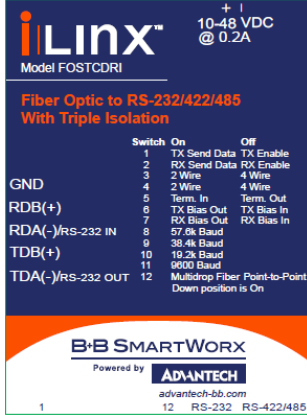
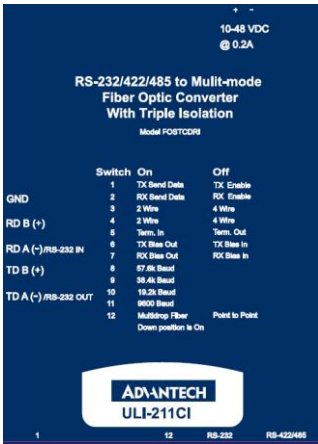
The change will be applied on the ULI-211CI (BB-FOSTCDRI). If you need more information or special support, please contact the corresponding PMs/AEs listed in the table below.







**Note: The ordering process has not been changed. Customers should continue to order model number BB-FOSTCDRI.**

- Reason for the Change:** Branding / UL File Change
- Affected Products:** ULI-211CI (BB-FOSTCDRI)
- Impact on Application:** No change to form, fit, or function.

Item	Impact
Impact on Mechanical Design	No
Impact on Software Compatibility	No
Impact on Environment Characteristics	No
Impact on System Certifications	<b>YES – The UL file numbers are changing. Add UKCA. See label plate below.</b>
Physical Outlook Change	<b>Yes</b>
Ordering P/N Change	No
Cut-in Implement	Component Running Change

### 4. Description of the Change(s):

Affected Models	Current Component	New Component	Category	Outlook Difference	Reason
ULI-211CI BB-FOSTCDRI	20BB250- 10538-00	1990038124T000	Label	<p><b>Old name plate</b></p>  <p><b>New name plate</b></p> 	Branding

<p>ULI-211CI BB-FOSTCDRI</p>	<p>20BB7674R1</p>	<p>20BB7674R2</p>	<p>Label</p>	<p><b>Old Name Plate</b></p> <p>This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any that may cause undesired operation.</p>  <p>Ind. Cont. Eq. 44W2 E222870</p>   <p>Ind. Cont. Eq. For HAZ LOC 3HTV E245458 Class 1, Div. 2, Groups A, B, C, D Temp. Code: T4A Max. Ambient Temp.: 80C Max. Input Power: 1.75W</p> <p>WARNING - Explosion Hazard - Do Not Disconnect While Circuit Is Live Unless Area is Known To Be Non-Hazardous.</p> <p><b>New Name Plate</b></p> <p>This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any that may cause undesired operation.</p>  <p>Ind. Cont. Eq. 5DX5 E327848</p>   <p>Ind. Cont. Eq. For HAZ LOC 5DW5 E337172 Class 1, Div. 2, Groups A, B, C, D Temp. Code: T4A Max. Ambient Temp.: 80C Max. Input Power: 1.75W Factory ID: USH3</p> <p>WARNING - Explosion Hazard - Do Not Disconnect While Circuit Is Live Unless Area is Known To Be Non-Hazardous.</p>	<p>Compliance</p>
----------------------------------	-------------------	-------------------	--------------	--	-------------------

**5. Implementation & Schedule of the Change(s):**

Affected Models	ECOM Number	Estimated Effective Date	Cut-in Implement	Change Description
ULI-211CI (BB-FOSTCDRI)	ECOM-195354	12/5/2022	Running Change	Update name plate.

\*Note: Cut-in progress depends on factory production schedule.

\*\* Note: The ordering process has not been changed. Customers should continue to order model number BB-FOSTCDRI

**Contact Windows**

PM	Brian Foster / <a href="mailto:brian.foster@advantech.com">brian.foster@advantech.com</a>
AE	N/A