


PRODUCT CATALOG

Military, Space and Testing Equipment




EMERSON
Network Power

Trompeter
Connectivity Solutions

Emerson Network Power Connectivity Solutions has a wide range of cable assemblies and connectors suited for RF, Microwave and Fiber Optic signal transmission. Connectivity Solutions is a vertically integrated supplier of custom, fixed length and semi-rigid cable assemblies from DC to 50 GHz. Our product lines deliver custom-engineered products and solutions to satisfy the most demanding and complex requirements.

AIM-Cambridge Connectivity Solutions



Aim-Cambridge has a universal line of products that offer cost effective, high quality solutions for connectivity. Our connectors are available in BNC, Type N, F Type, RCA, UHF, Mini-UHF, TNC, D-Sub and Modular Plugs for Data/Telecom applications. In addition, we stock a wide variety of cables for A/V, SATV, CATV, computer and LAN applications, as well as a complete line of termination tools and structured cabling products. AIM-Cambridge promises that its product will provide you with unmatched consistency, quality, reliability and ease of use.

Johnson Connectivity Solutions



Johnson designs and manufactures an industry leading line of RF coaxial connectors and adapters, which are available in both 50 and 75 ohm versions. Johnson connectors are designed to provide the highest quality data transmission for audio, video and data applications. The Johnson line of products can address frequency ranges from DC to 46GHz and all sizes from Ultra-miniature interfaces (UMC), Micro-miniature, (MCX, MMCX, SMP), Subminiature (SMA, SMB, SMK, kwiQMate™), Medium connectors (Type N connectors) through to large connectors (DIN7/16). The breadth of products available within the Johnson range includes board and cable mount connectors as well as semi-rigid, conformable, and flexible RF coaxial cables.

Midwest Microwave Connectivity Solutions



Midwest Microwave manufactures passive coaxial microwave components that are known for their precision performance and high quality that meets the precise requirements of the RF/Microwave industry. Our broad product portfolio includes: Attenuators, Precision Adapters, Terminations, DC Blocks, Power Dividers, Couplers, Equalizers, Phase Shifters, Connectors, Custom Cable Assemblies and Test Cables that are designed and manufactured for both military and commercial applications.

Midwest also offers a wide variety of Qualified Product List (QPL) approved products in the M3933, M39030 and M39012 series, as well as many DESC/DSCC approved models.

Semflex Connectivity Solutions



Semflex designs and manufactures low loss, flexible, microwave coaxial cable and custom cable assemblies for the military/aerospace, commercial OEM and test instrumentation markets. Semflex offers cables ranging from DC to 50 GHz, available with ultra low insertion loss, power ratings up to 21 KW, and available with all popular connectors.

Stratos Connectivity Solutions



Stratos optical connectivity products is globally recognized as highly reliable, cost-effective, and provides optical connectivity solutions that are virtually immune to dust, mud, oil, water, and other contaminants.

Our expanded beam connectivity products are ideal for harsh environment applications in the broadcast, industrial, petrochemical and military/aerospace markets where high reliability, low maintenance and quick serviceability are critical requirements. Our optical active products are used mainly in military, aerospace and industrial markets where high speed/high reliable performance is mission critical. The actives product line includes optical transceivers, optical media converters and custom devices tailored to your application.

Trompeter Connectivity Solutions



Trompeter is recognized as a global leader in delivering best in class RF connectivity products. The Trompeter line of patch jacks, RF connectors, cable assemblies, HDTV digital technology and DS3 connectivity solutions is unrivalled. Our mission is to provide products that continually deliver the highest quality signal integrity for the most demanding applications in Telecom, Central Office, Broadcast, Military Aerospace, and Instrumentation markets worldwide. Our extensive line of cost-effective products are rigorously designed and tested to provide the critically engineered solutions necessary to enhance the end-user's overall experience.

Vitelec Connectivity Solutions



Vitelec provides a comprehensive range of RF coaxial interconnect products and cable assemblies. The company has a long established reputation for offering quality and innovation with a wide range of both standard and custom designed products for the electronic and communication industries.

TWINAX/TRIAX CONNECTORS

Mil-Std-1553B Data Bus General Specifications Guide

70/370 SERIES

MIL-C-49142 QPL'd Connectors
 TRB/TRT Miniature Plugs & Jacks
 TRB/TRT Miniature Bulkhead Jacks
 Miniature Circuit Board Jacks
 TRB Series Pad, Paralleling Jacks, & T Adapter
 Twinax/Triax Terminations & RFI Caps
 Miniature Twinax/Triax Patching
 Miniature Twinax/Triax Normal-Thru Patch Jacks
 Subminiature Twinax/Triax Patching
 Standard & Subminiature Twinax/Triax Looping Plugs
 Hermetically Sealed Connectors
 Mating Twinax Size 8 Contacts

150/3150 SERIES

TRS/TTM Subminiature Jacks and Plugs
 TRS/TTM Subminiature Bulkhead Jacks
 Subminiature Bulkhead Jacks, Adapters, & Push-on

450 SERIES

Concentric Twinax Connectors

80/380 SERIES

TRC/TRN Standard Twinax/Triax Threaded

30/330 SERIES

TWBNC/TWTNC, Two-pin Polarized Connectors

COAX CONNECTORS

20/220 SERIES

Miniature Coax BNC Plugs & Jacks
 Miniature Coax BNC Bulkhead Jacks
 Coax Circuit Board Jacks

250 SERIES

Mini-BNC Coax Plugs & Jacks

40/240 SERIES

TNC Miniature Coax Threaded
 TNC Bulkhead Jacks, Miniature Coax Threaded

120 SERIES

BNC/TNC Miniature Push-on Jacks & Plugs

1.0/2.3 DIN CONNECTORS

1.6/5.6 DIN CONNECTORS

Miniature Coax DIN Connectors
 Coaxial Ground Filter Bulkhead Jacks

TYPE N CONNECTORS

90 Series Coax Type N Connectors

130 Series Coax F Type Connectors 39-40
 Low VSWR Coax Connectors 41

TPS/TCM Subminiature Coax Threaded Jacks & Plugs 42

PATCHING PRODUCTS

High Frequency Video Patching 43-44
 Coax Patch Jacks & Accessories 45-46
 Mini-WECox Coax Patch Plugs 47
 Mini-WECox Coax Patch Jacks 48
 Standard Coax Patching & Looping 49
 50Ω Miniature Coax Patching 50
 Panel Specifications 51
 Distribution Panels 52
 Standard/Miniature Panels 53-54
 "D" Mounting Hole Specifications 54

CUSTOM CABLE ASSEMBLIES 55-56

TERMINATIONS & RFI CAPS

Coax Terminations & RFI Caps 57
 Chain Options 57
 Stainless Steel Rope for "D" Ring Option 57

ADAPTERS (CUSTOM AND STANDARD)

Adapter Circuitry Schematics 58
 Coax to Coax Adapter Table 59
 Coax/Twinax/Triax Adapter Table 60-61

TOOLS & ACCESSORIES

Cable Strippers 62
 Crimp Tools 63
 Cable Assembly Testers 64
 Tool Kit/Bulk Packaging 65

APPENDIX

Trompeter Cable Specifications 66-68
 Twinax/Triax: Plenum/Halogen Free Cable Specs 68
 Connector Compatibility Table 69-70
 General Material/ Finish Specifications 71
 BNC Coax Tool/Wrench Crimp Assembly Illustrations 72
 Cable Group Table Notes 73
 Cable Group Tables 74-91

INDEX

Part Number Index 93-95
 Terms & Conditions 96-97

Twinax/Triax Connectors / Specifications

Trompeter offers a broad line of connectors manufactured to meet or exceed the Mil-Specs governing twinax connectors. In fact, Mil-PRF-49142 was created from the Trompeter concentric twinax/triax connector design.

The following information reflects the specification requirements for each family of connectors in both twinax and triax applications. Use this chart to determine the proper connector type to be used in your application, based on the environment and electrical requirements of your design. Trompeter's technical support team is available to answer any specification questions you may have.



| MIL-Spec Triax Series | Trompeter Connector Series | Bayonet Typical Lug Count | Available Threaded | Gender | Equivalent Coax Series |
|-----------------------|----------------------------|---------------------------|--------------------|---------|------------------------|
| TRB | 70 | 3 | Yes | Normal | BNC |
| TRC | 80 | 2 | Yes | Reverse | N |
| TRS | 150 | 3 | Yes | Normal | M-BNC |
| 1553 | 450 | 3 | Yes | Either | n/a |

The following is the latest list from the MIL-STD-1553B supply:

Trompeter Number:

PL75-47
 PL375C-201
 PL75C-201
 PL155AC-201
 PL3155AC-201
 PL155AC-201
 PL155AC-201
 PL3455ACS-201
 PL455ACP-201

MIL-STD-1553B Data Bus General Specifications Guide

| Characteristic Requirements | 70 Series TRB/TRT | 80 Series TRC/TRN | 150 Series TRS/TTM | 450 Series TCS |
|--|----------------------|----------------------|--------------------|-----------------|
| Nominal Impedance | Non-constant | Non-constant | Non-constant | Non-constant |
| Frequency Range | 0-500 MHz | 0-500 MHz | 0-500 MHz | 0-2 MHz |
| Voltage Rating (max.) @ sea level | 400 VRMS | 500 VRMS | 400 VRMS | 900 VRMS |
| Voltage Rating (max.) @ 70,000 ft. | 100 VRMS | 125 VRMS | 100 VRMS | N/A |
| Insulation Resistance | 5000 MΩ | 5000 MΩ | 5000 MΩ | 5000 MΩ |
| Dielectric Withstanding Voltage (between center cond. & inter. cond.) | 1200 VRMS | 1500 VRMS | 1200 VRMS | 900 VAC |
| Dielectric Withstanding Voltage (between inter. cond. & outer cond.) | 500 VRMS | 500 VRMS | 500 VRMS | 900 VAC |
| RF High Potential Withstanding Voltage (between center cond. & inter. cond.) | 800 VRMS | 1000 VRMS | 500 VRMS | 900 VAC @ 60 Hz |
| RF High Potential Withstanding Voltage (between inter. & outer cond.) | 200 VRMS @ 5-7.5 MHz | 350 VRMS @ 5-7.5 MHz | 125 VRMS | N/A |

Specifications continued on page 3...

* Specifications are minimum unless otherwise stated. Trompeter connectors are designed to exceed all minimum specifications.

MIL-STD-1553B Data Bus General Specifications Guide (cont'd)

| Characteristic Requirements | 70 Series TRB/TRT | 80 Series TRC/TRN | 150 Series TRS/TTM | 450 Series TCS |
|--|--|---|---|---|
| Corona Level (min.) | 200 VRMS @ 70,000 ft. | 375 VRMS @ 70,000 ft. | 125 VRMS @ 70,000 ft. | 250 VAC @ 50,000 ft. |
| Rise Time Degradation (max.) | 400 rs | N/A | 800 ps | 800 ps |
| Permeability of Nonmagnetic Material | <2.0 mu except hermetic versions | | | |
| Hermetic Seal (Where Applicable) | <1 x 10 ⁻⁸ cc/sec | N/A | <1 x 10 ⁻⁶ cc/sec | N/A |
| Connector Durability | 500 cycles minimum @ 12 cycles per minute max. | | | |
| Temperature Range | -65° to +165°C | -65° to +165°C | -65° to +200°C | -65° to 125°C |
| Force to Engage and Disengage Longitudinal (max.) Torque (max.) | 4 pounds 2.5 inch-pounds | 5 pounds 4 inch-pounds | 4 pounds 2.5 inch-pounds | 3 pounds 2.5 inch-pounds |
| Center Contact Retention Axial Force (min.) Plug Jack | 6 pounds 6 pounds | 6 pounds 6 pounds | 4 pounds 2 pounds | 6 pounds 6 pounds |
| Coupling Proof Torque (Threaded types only) | 15 inch-pounds | 15 inch-pounds | 10 inch-pounds | N/A |
| Coupling Mechanism Retention Force (min.) | 100 pounds | 100 pounds | 70 pounds | 100 pounds |
| Cable Retention Force (min.) | 40 pounds .200-.325 inch cable OD | 65 pounds .242-.419 inch cable OD | 40 pounds .120-.215 inch cable OD | 40 pounds .120-.180 inch cable OD |
| Salt Spray (corrosion) | 48 hrs minimum exposure (Standard nickel plating) 500 hrs minimum available (Call customer service for plating types). Standard for 450 Series. | | | |
| Moisture Resistance (10 cycles) | Total 240 hour minimum exposure | | | |
| Thermal Shock (5 cycles) (No physical damage/Pass DWV) | Total 5 hours 50 minutes min -65°C to +85°C | | | -65°C to +125°C |
| Specified Shock (sawtooth waveform, within peak - 50g's, duration - 11ms) | No discontinuity allowed. Velocity-change of shock pulse 10% of ideal value | | | |
| Vibration, High-frequency (36 cycles) (15g peak, 10-2000 Hz-10Hz in 20 minutes) | Total 12 hour minimum. No physical damage or loosening of parts. No discontinuity allowed. | | | |

* Specifications are minimum unless otherwise stated. Trompeter connectors are designed to exceed all minimum specifications.

Twinax/Triax Connectors

Built to Last

Premium Quality

Superior Mechanical Performance

Rugged Physical Properties

Extreme Reliability

Signals require protection from extraneous noise through non-signal carrying shielding. These interfacing connectors must provide contact surfaces isolated from each other, as well as from the outer shield. Trompeter twinaxial/triaxial connectors are designed with two (2) concentric contacts that are isolated from each other and the shielding connection.

Features

- All metallic parts are machined/formed to extremely close tolerances
- All bodies are made of top quality brass with bright nickel-plated non-tarnish finish
- Fully enclosed, heat-treated, beryllium-copper outer conductor spring (not half hard slotted brass)
- Heat-treated, beryllium-copper center socket contact with 50 millionths inch gold plating




70 Series

Miniature 2, 3, 4-lug, and Push-on (TRB)

370 Series

Miniature Threaded (TRT)

(70 Series shown below)

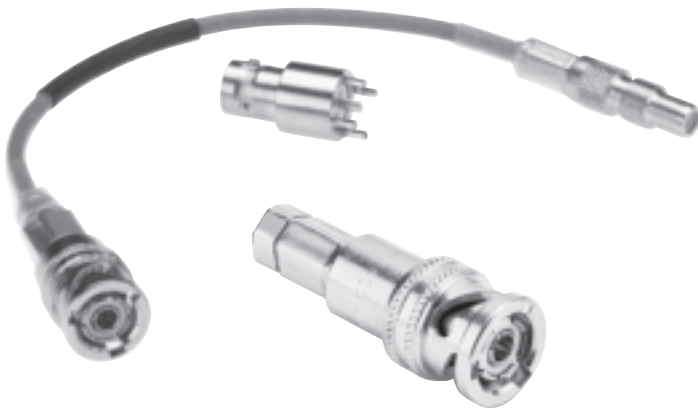

These concentric twinax/triax connectors are ideal for applications where weight is not a primary concern. They are commonly used in digital data bus, video pair, MIL-STD-1553B (airborne/ground, primary/redundant), base-band circuit and any application for "noise-free guarded" circuits.

Features

- Same size as BNC/TNC connectors. Large body versions are available to accommodate larger cables
- Field serviceable, wrench crimp versions for cables with up to .475" outer diameters
- Tool crimp versions for quick termination of cables with up to .250" outer diameters
- 3-lug, 4-lug, and threaded versions provide different levels of mechanical stability and keying
- Does not require mechanical alignment for mating.
- QPL to MIL-C-49142 (see list on page 5)
- Meets MIL-C-49142, 48-hour salt spray requirement
- Special plating available to satisfy MIL-STD-1344, 500-hour salt spray requirement
- Push-on versions for test cable applications
- Fewer pieces to assemble
- Hermetically sealed versions are available (page 16)

MIL-C-49142 Qualified Products List

Trompeter has always been a leader in twinax connector design and development. This time we've designed a new connector style to meet the requirements of MIL-C-49142, Category G.

What is Category G? It is the section of the MIL-Spec that requires tool crimping of the TRB (70) series connectors. We are also qualified to category A which is for wrench crimp TRB connectors.

Below is a list of qualified Trompeter products from the Defence Electronic Supply Center (DESC). QPL parts must be ordered by the *MIL-Number*. Many of Trompeter's 70 Series concentric twinax connectors are QPL to MIL-C-49142. QPL versions are silver plated and can be ordered using the [Government Designation part numbers listed](#). Corresponding standard nickel plated connectors can be ordered using the standard part numbers.

| Mil-number | Trompeter Number |
|----------------|------------------|
| M49142/03-0001 | PL75-7 |
| M49142/03-0002 | PL75-7 |
| M49142/03-0005 | 305-0042-1 |
| M49142/03-0007 | PL75-9 |
| M49142/03-0008 | PL75-47 |
| M49142/03-0009 | PL75-60 |
| M49142/03-0011 | 305-0811-1 |
| M49142/03-0016 | PL75MC213 |
| M49142/03-0017 | PL75MC-201 |
| M49142/03-0101 | PL75Y-7 |
| M49142/03-0102 | PL75Y-7 |
| M49142/03-0105 | 305-0042Y-1 |
| M49142/03-0107 | PL75Y-9 |
| M49142/03-0108 | PL75Y-47 |
| M49142/03-0109 | PL75Y-60 |
| M49142/03-0111 | 305-0811Y-1 |
| M49142/03-0116 | PL75MCY-213 |
| M49142/03-0117 | PL75MCY-201 |
| M49142/03-0201 | PL75S-7 |
| M49142/03-0202 | PL75S-7 |
| M49142/03-0205 | 305-0042S-1 |
| M49142/03-0207 | PL75S-9 |
| M49142/03-0208 | PL75S-47 |
| M49142/03-0209 | PL75S-60 |
| M49142/03-0211 | 305-0811S-1 |
| M49142/03-0216 | PL75MCS-213 |
| M49142/03-0217 | PL75MCS-201 |
| M49142/04-0004 | BJ76 |
| M49142/04-0104 | BJ76Y |
| M49142/04-0204 | BJ76S |
| M49142/05-0001 | BJ79-7 |
| M49142/05-0002 | BJ79-7 |
| M49142/05-0006 | 305-0042-7 |
| M49142/05-0007 | BJ79-9 |
| M49142/05-0008 | BJ79-47 |
| M49142/05-0009 | BJ79-60 |
| M49142/05-0011 | 305-0811-3 |
| M49142/05-0016 | BJ79MC-213 |
| M49142/05-0017 | BJ79MC-201 |
| M49142/05-0101 | BJ79Y-7 |
| M49142/05-0102 | BJ79Y-7 |
| M49142/05-0106 | 305-0042Y-7 |
| M49142/05-0107 | BJ79Y-9 |
| M49142/05-0108 | BJ79Y-47 |
| M49142/05-0109 | BJ79Y-60 |
| M49142/05-0111 | 305-0811Y-3 |
| M49142/05-0116 | BJ79MCY-213 |
| M49142/05-0117 | BJ79MCY-201 |
| M49142/05-0201 | BJ79S-7 |
| M49142/05-0202 | BJ79S-7 |
| M49142/05-0206 | 305-0042S-7 |
| M49142/05-0207 | BJ79S-9 |
| M49142/05-0208 | BJ79S-47 |
| M49142/05-0209 | BJ79S-60 |
| M49142/05-0211 | 305-0811S-3 |
| M49142/05-0216 | BJ79MCS-213 |
| M49142/05-0217 | BJ79MCS-201 |

| Mil-number | Trompeter Number |
|----------------|------------------|
| M49142/06-0001 | CJ70-7 |
| M49142/06-0002 | CJ70-7 |
| M49142/06-0006 | 305-0042-4 |
| M49142/06-0007 | CJ70-47 |
| M49142/06-0008 | CJ70-9 |
| M49142/06-0009 | CJ70-60 |
| M49142/06-0011 | 305-0811-2 |
| M49142/06-0016 | CJ70MC-213 |
| M49142/06-0017 | CJ70MC-201 |
| M49142/06-0101 | CJ70Y-7 |
| M49142/06-0102 | CJ70Y-7 |
| M49142/06-0106 | 305-0042Y-4 |
| M49142/06-0107 | CJ70Y-47 |
| M49142/06-0108 | CJ70Y-9 |
| M49142/06-0109 | CJ70Y-60 |
| M49142/06-0111 | 305-0811Y-2 |
| M49142/06-0116 | CJ70MCY-213 |
| M49142/06-0117 | CJ70MCY-201 |
| M49142/06-0201 | CJ70S-7 |
| M49142/06-0202 | CJ70S-7 |
| M49142/06-0206 | 305-0042S-4 |
| M49142/06-0207 | CJ70S-47 |
| M49142/06-0208 | CJ70S-9 |
| M49142/06-0209 | CJ70S-60 |
| M49142/06-0211 | 305-0811S-2 |
| M49142/06-0216 | CJ70MCS-213 |
| M49142/06-0217 | CJ70MCS-201 |
| M49142/08-0001 | PL375-7 |
| M49142/08-0002 | PL375-7 |
| M49142/08-0005 | 305-0042-9 |
| M49142/08-0006 | PL375-47 |
| M49142/08-0008 | PL375-60 |
| M49142/08-0010 | 305-0811-5 |
| M49142/08-0011 | 305-0486-1 |
| M49142/08-0016 | PL375MC-213 |
| M49142/08-0017 | PL375MC-201 |
| M49142/09-0001 | BJ379-7 |
| M49142/09-0002 | BJ379-7 |
| M49142/09-0006 | BJ379-47 |
| M49142/09-0007 | 305-0042-11 |
| M49142/09-0009 | BJ379-60 |
| M49142/09-0011 | 305-0811-7 |
| M49142/09-0012 | 305-0486-3 |
| M49142/09-0016 | BJ379MC-213 |
| M49142/09-0017 | BJ379MC-201 |
| M49142/10-0001 | BJ376 |
| M49142/11-0001 | CJ370-7 |
| M49142/11-0002 | CJ370-7 |
| M49142/11-0006 | CJ370-47 |
| M49142/11-0007 | 305-0042-12 |
| M49142/11-0009 | CJ370-60 |
| M49142/11-0011 | 305-0811-6 |
| M49142/11-0012 | 305-0486-2 |
| M49142/11-0016 | CJ370MC-213 |
| M49142/11-0017 | CJ370MC-201 |


Twinax/Triax Connectors / Miniature Plugs & Jacks

70/370 Series, TRB/TRT

Cable Plug

Military Crimp Tool

- 3-Lug..... PL75MC-
- 2-Lug..... PL74MC-
- 4-Lug..... PL75MCFL-
- Threaded..... PL375MC-




PL75MC-202 Shown
For polarizations, call customer service.

Cable Plug

Tool Crimp

- 2-Lug..... PL74C-
- 3-Lug..... PL75C-
- 4-Lug..... PL75CFL-
- Threaded..... PL375C-

* Length depends on Cable Group

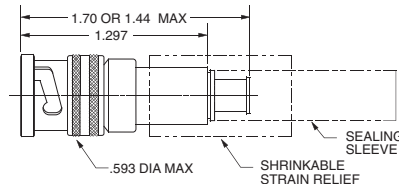


PL74C-202 Shown

Cable Plug

Wrench Crimp

- 2-Lug..... PL74-
- 3-Lug..... PL75-
- 4-Lug..... PL75FL-
- Threaded..... PL375-

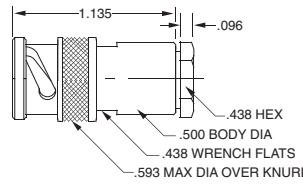


PL74-9 Shown

Cable Plug

Tool Crimp, Push-on

PL73C-

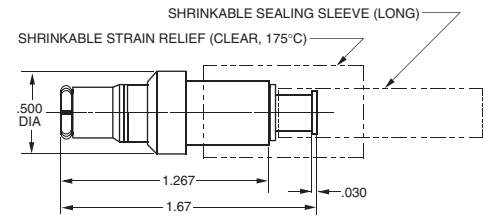


PL73C-202 Shown

Cable Plug

Wrench Crimp, Push-on

PL73-

Order Large Body version for cables with jacket dia. greater than .323".

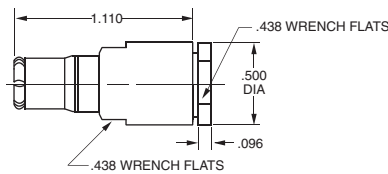


PL73-9 Shown

Cable Jack

Wrench Crimp

- 3-Lug..... CJ70-
- 2-Lug..... CJ70TL-
- 4-Lug..... CJ70FL-
- Threaded..... CJ370-




CJ70-9 Shown

Right Angle Cable Plug

Tool Crimp

- 2-Lug..... PLR74C-
- 3-Lug..... PLR75C-
- 4-Lug..... PLR75CFL-
- Threaded..... PLR375C-

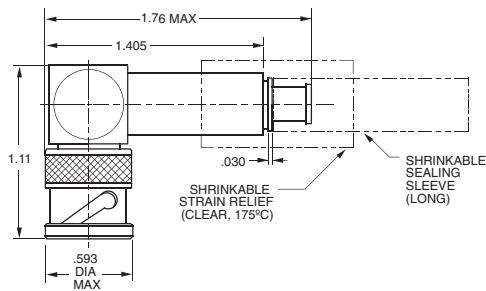


PLR74C-201 Shown
For cable groups 201-223 only. Contact customer service for other cables.

Cable Jack

Tool Crimp

- 3-Lug..... CJ70C-
- 2-Lug..... CJ70CTL-
- 4-Lug..... CJ70CFL-
- Threaded..... CJ370C-

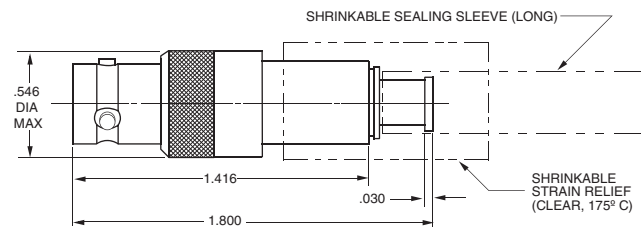


CJ70C-202 Shown

Right Angle TRB Adapter

TRB Male to Female

- 3-Lug..... ADRMF70
- 2-Lug..... ADRMF70TL
- Threaded..... ADRMF370
- 4-Lug..... ADRMF70FL




ADRMF70 Shown

TRB Coupling Adapter

Barrel Connector

- 3-Lug..... AD78
- 2-Lug..... AD78TL
- 4-Lug..... AD78FL
- Threaded..... AD378




AD78 Shown

Refer to Cable Group Tables, pages 74-91.

Bulkhead Jack

Front Mount, Solder Pot


- 3-Lug..... BJ770
- 2-Lug..... BJ77TL
- 4-Lug..... BJ77FL
- Threaded..... BJ377

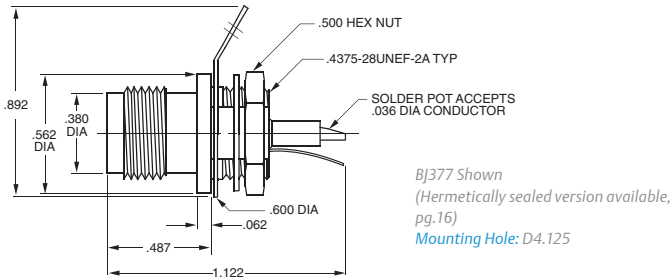

Bulkhead Jack

Tool Crimp


- 3-Lug..... BJ79C-⚠
- 2-Lug..... BJ79CTL-⚠
- 4-Lug..... BJ79CFL-⚠
- Threaded..... BJ379C-⚠

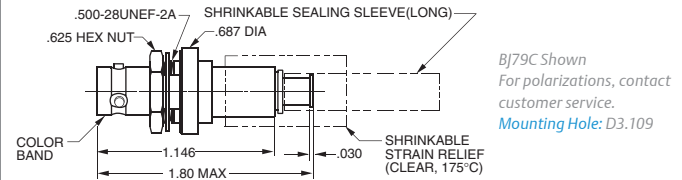

Feed-Thru Bulkhead Jack

- 3-Lug..... BJ78
- 2-Lug..... BJ78TL
- 4-Lug..... BJ78FL
- Threaded..... BJ378

BJ378 Shown (Hermetically sealed version available, pg.16) Mounting Hole: D3.187

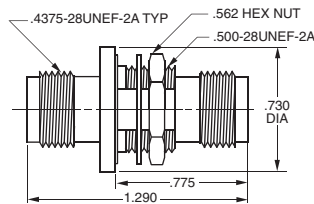


Bulkhead Cable Jack

Wrench Crimp

- 3-Lug..... BJ79-⚠
- 2-Lug..... BJ79TL-⚠
- 4-Lug..... BJ79FL-⚠
- Threaded..... BJ379-⚠

BJ379-7 Shown Mounting Hole: D3.160

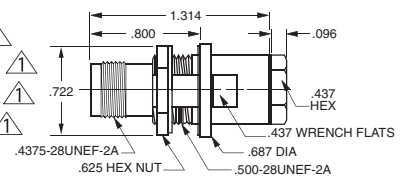


Bulkhead Solder Pot

Rear Mount, Solder Pot

- 3-Lug..... BJ76
- 2-Lug..... BJ76TL
- 4-Lug..... BJ76FL
- Threaded..... BJ376

BJ76 Shown Mounting Holes: D3.240 w/o solder lug/D3.208 w/ solder lug

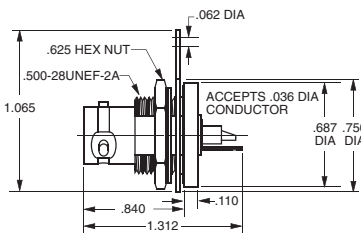


Insulated Bulkhead Jack

Rear Mount, Solder Pot

- 3-Lug..... BJ75
- 2-Lug..... BJ75TL
- 4-Lug..... BJ75FL
- Threaded..... BJ375


BJ75 Shown Mounting Hole: D2.140

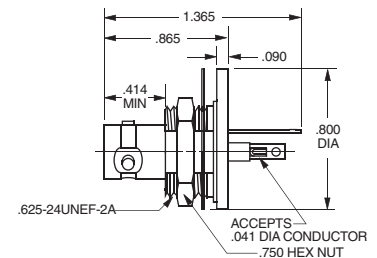

Insulated Bulkhead Cable Jack

Wrench Crimp

- 3-Lug..... BJ74-⚠
- 2-Lug..... BJ74TL-⚠
- 4-Lug..... BJ74FL-⚠
- Threaded..... BJ374-⚠

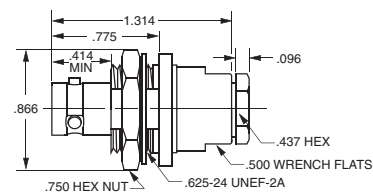


BJ74-9 Shown Mounting Hole: D2.140

Insulated Bulkhead Cable Jack

Tool Crimp

- 3-Lug..... BJ74C-⚠
- 2-Lug..... BJ74CTL-⚠
- 4-Lug..... BJ74CFL-⚠
- Threaded..... BJ374C-⚠

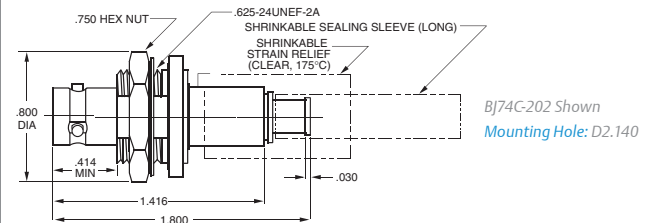


Insulated Feed-Thru Jack

Wrench Crimp

- 3-Lug..... BJ73
- 2-Lug..... BJ73TL
- 4-Lug..... BJ73FL
- Threaded..... BJ373

BJ73 Shown Mounting Hole: D2.140

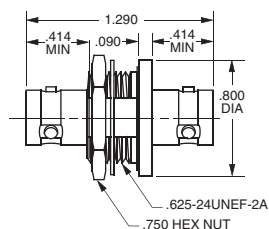


Insulated Bulkhead Jack

Front Mount

- 3-Lug..... BJ72
- 2-Lug..... BJ72TL
- 4-Lug..... BJ72FL
- Threaded..... BJ372

BJ72 Shown Mounting Hole: D2.140

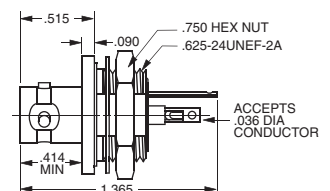

⚠ Refer to Cable Group Tables, pages 74-91.
 "D" mounting holes see page 54. For polarizations, contact customer service.


Twinax/Triax Connectors / Miniature Circuit Board Jacks

70/370 Series

Twinax/Triax TRB Concentric

Circuit Board Jack

- 3-Lug..... CBJ70
- 2-Lug..... CBJ70TL
- 4-Lug..... CBJ70FL
- (TRT) Threaded..... CBJ370

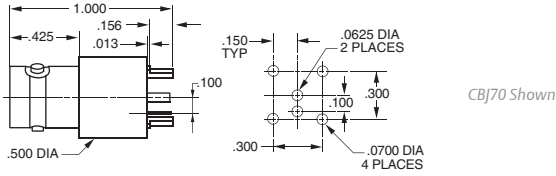


CBJ70 Shown

Twinax/Triax TRB Non-Insulated Bulkhead Jack

Concentric Female 3-Lug Bulkhead Mount

- 3-Lug..... CBBJ79
- 2-Lug..... CBBJ79TL
- 4-Lug..... CBBJ79FL
- Threaded..... CBBJ379

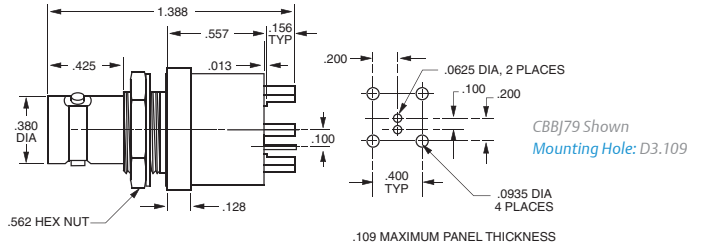


CBBJ79 Shown
Mounting Hole: D3.109

Twinax/Triax TRB Right Angle Concentric

Circuit Board Jack


- 3-Lug..... CBJR70, CBJR70A

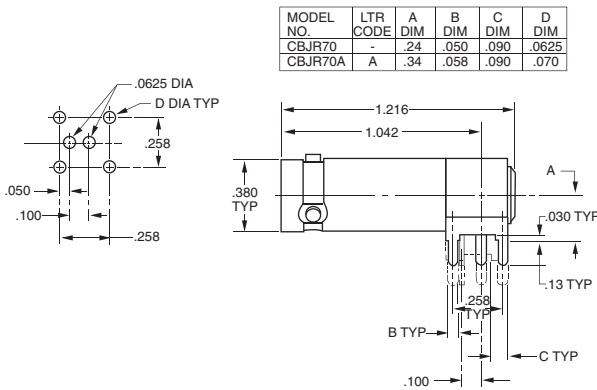

Twinax/Triax TRB Insulated Bulkhead Jack

Concentric Female 3-Lug, Bulkhead Mount

- 3-Lug..... CBBJ74

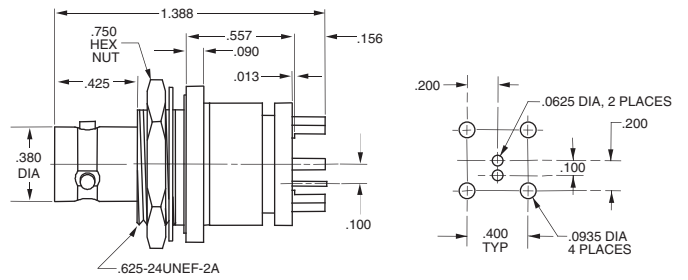


Mounting Hole: D2.109

Right Angle Circuit Board Bulkhead Jack

Standard Version

- 3-Lug..... CBBJR79
- 2-Lug..... CBBJR79TL
- 4-Lug..... CBBJR79FL
- Threaded..... CBBJR379

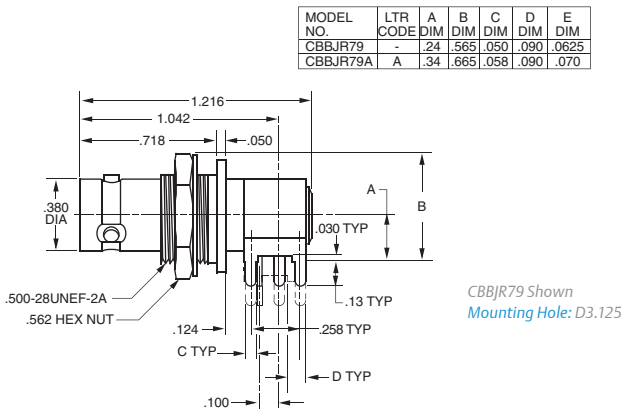


CBBJR79 Shown
Mounting Hole: D3.125

Right Angle Insulated Circuit Board Bulkhead Jack

Insulated Version

- 3-Lug..... CBBJR74
- 2-Lug..... CBBJR74TL
- 4-Lug..... CBBJR74FL
- Threaded..... CBBJR374

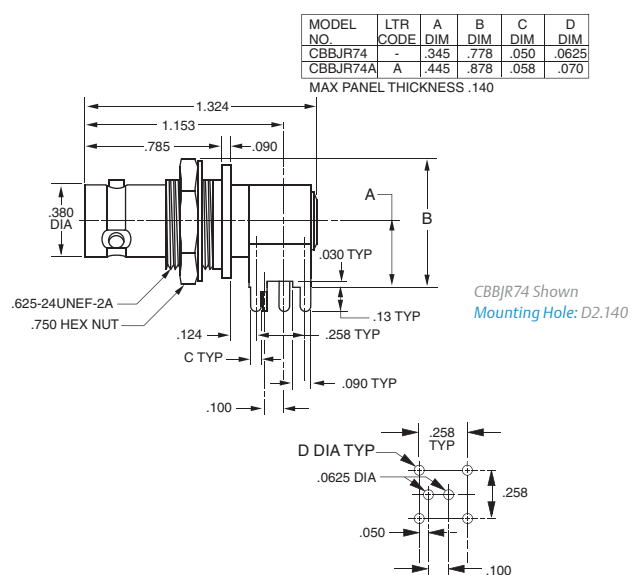


CBBJR74 Shown
Mounting Hole: D2.140

Add "A" for tall versions example: CBBJR74A



"D" mounting holes see page 54.

TRB Series Pad

TRB 3-Lug Plug and Jack

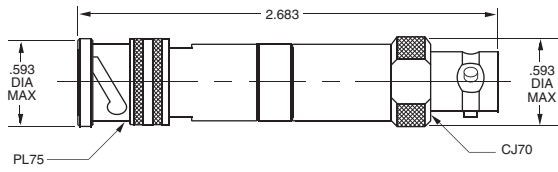

Part Number Circuitry Schematic

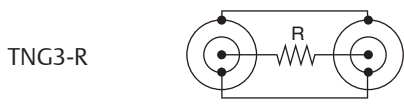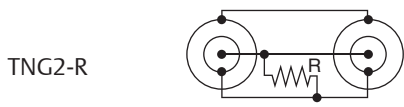


R-Resistance (1/2W 1%)
Substitute resistive value for each "R_n" unless all values are identical.

TRB "T" Adapter

- 3-Lug..... BN73
- 2-Lug..... BN73TL
- 4-Lug..... BN73FL

TRT "T" Adapter

- Threaded..... BN373

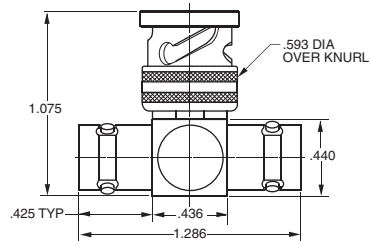


BN73 Shown

Fixed Paralleling Jacks

Fixed Paralleling Jack

Two Plugs, One Jack

- 3-Lug..... TN2
- 2-Lug..... TN2TL
- 4-Lug..... TN2FL
- Threaded..... TN2T

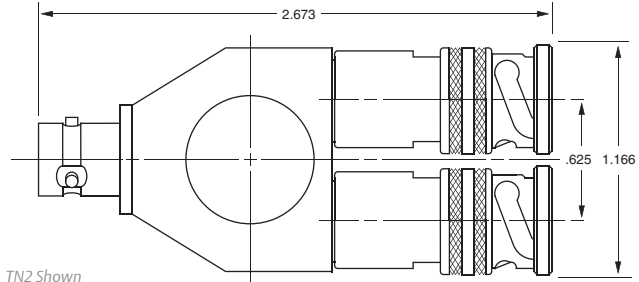


TN2 Shown

Fixed Paralleling Jack

Two Jacks, One Plug

- 3-Lug..... TN2A
- 2-Lug..... TN2TLA
- 4-Lug..... TN2FLA
- Threaded..... TN2TA

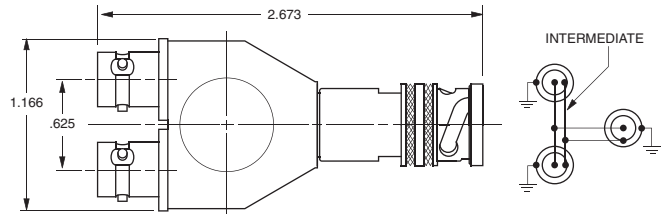


TN2A Shown

* Other options available including Random Paralleling.
Contact customer service for more information.

Triax Parallel Network

305-0138

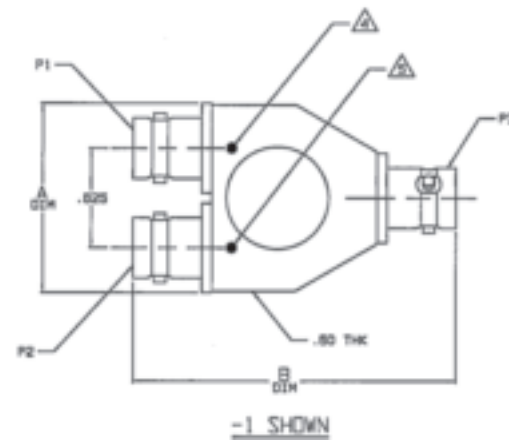

Twinax/Triax Connectors / RFI Caps & Terminations

Twinax/Triax Terminators and RFI (Dust Caps)

Trompeter provides Terminations and RFI caps versions of many of our twinax/triax connectors. Resistors are normally 1/8 watt for subminiature connectors and 1/2 watt for miniature and standard size connectors, with 1% tolerances for all.




| Parts to be capped | Description | Terminator | RFI (Dust Cap) |
|----------------------|---------------------------|--------------------------------|-----------------|
| BJ30/CJ30 Series | TWBNC Jack | TNGT1-(3)-R | RFI25-(3) |
| BJ70/CJ70 Series | TRB, Jack | TNG1-(3)-R | RFI75-(3) |
| BJ70FL/CJ70FL | TRB, Jack | TNGFL1-(3)-R | RFI75FL-(3) |
| BJ70TL/CJ70TL | TRB, Jack | TNGTL1-(3)-R | RFI75TL-(3) |
| BJ80/CJ80 | TRC, Jack | TNGL1-(3)-R | RFI85-(3) |
| BJ150/CJ150 | TRS, Jack | TNGM1-(3)-R | RFI155-(3) |
| BJ150FL/CJ150FL | TRS, Jack | TNGMFL1-(3)-R | RFI155FL-(3) |
| BJ375/CJ370 | TRT, Jack | TNT1-(3)-R | RFI375-(3) |
| BJ375/CJ370 | TRT, Jack | TNTS1-(3)-R (Safety Holes) | RFI375-(3) |
| BJ380/CJ380 | TRN, Jack | TNTL1-(3)-R | RFI385-(3) |
| BJ803/CJ803 | TRC, 3-lug Jack | TNG3L1-(3) | RFI853-(3) |
| BJ3150/CJ3150 | TTM, Jack | TNTM1-(3)-R | RFI3155-(3) |
| J72 | Twinax Patch Jack | TPT-(3)-R | RFI70-(3) |
| J72L | Twinax Patch Jack | TPTL-(3)-R | RFI70-(3) |
| J152 | Twinax Submin. Patch Jack | TPTWM-(3)-R | RFI150-(3) |
| PL30 | TWBNC, Plug | TNGBJT1-(3)-R | RFI21-(3) |
| PL74 | TRB, Plug | TNGBJTL1-(3)-R | RFI77TL-(3) |
| PL75 | TRB, Plug | TNGBJ1-(3)-R | RFI77-(3) |
| PL75FL | TRB, Plug | TNGBJFL1-(3)-R | RFI77FL-(3) |
| PL80 | TRC, Plug | TNGLF1-(3)-R | RFI80-(3) |
| PL803 | TRC, Plug | TNGLF3L1-(3)-R | RFI80(3) |
| PL380 | TRN | TNTLF1-(3)-R | RFI80(3) |
| PL150 | Submin. Patch Plug | TJTWM-(3)-R | - |
| PL155 | TRS, Plug | TNGBJM1-(3)-R (Bulkhead Mount) | RFI157-(3) |
| PL155 | TRS, Plug | TNGMF1-(3)-R | RFI157-(3) |
| PL155FL | TRS, Plug | TNGBJMFL1-(3) (Bulkhead Mount) | RFI157FL-(3) |
| PL155FL | TRS, Plug | TNGMFFL1-(3)-R | RFI157FL-(3) |
| PL3155 | TTM, Plug | TNTBJM1-(3)-R (Bulkhead Mount) | RFI3157-(3) |
| PL3155 | TTM, Plug | TNTMF1-(3)-R | RFI3157-(3) |
| PL350 | TCM, Plug | | RFI357-(3) |
| PL375 | TRT, Plug | TNTBJ1-(3)-R (Bulkhead Mount) | RFI377-(3) |
| PL375 | TRT, Plug | TNTF1-(3)-R | RFI377-(3) |
| PL380 | TRN, Plug | TNTLF1-(3)-R | RFI380-(3) |
| PL803 | TRC, 3-lug, Plug | TNGLF3L1-(3)-R | RFI803-(3) |
| | | | |
| For 450/3450 Series: | Concentric Twinax | See pages 22-23 | See pages 22-23 |

Notes: (3) = Chain options, see page 63.
"R" = Resistance

For Chain Options and Ordering Instructions, see page 57.

Patch Jack


TRB 3-Lug
J72

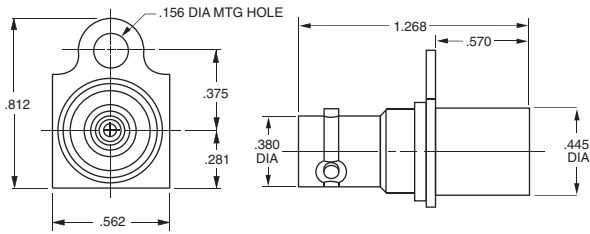

Patch Cord

Patch Plug to Patch Plug


Twinax..... PTW-L-Z
Triax..... PTR-L-Z



Cable Assembly

TRB 3-Lug Plug to Patch Plug



Twinax..... PTWX-L-Z
Triax..... PTRX-L-Z



Patch Jack

Shielded

Without Hood..... J72D
With Hood..... J72S-⚠

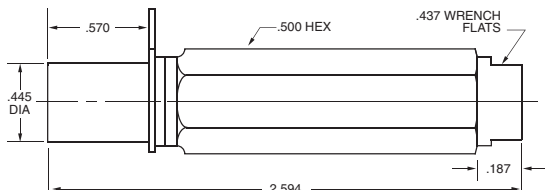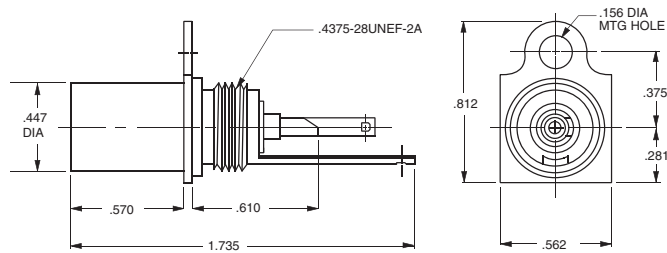


Cable Assembly

TRB 3-Lug Plugs


Twinax..... PTWY-L-Z
Triax..... PTRY-L-Z

Bend relief available, call customer service.




Parallel Patch Cord

Twinax..... PTWS-L-Z
Triax..... PTRS-L-Z

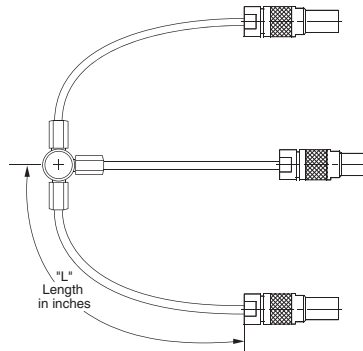

Patch Plug

PL71-⚠

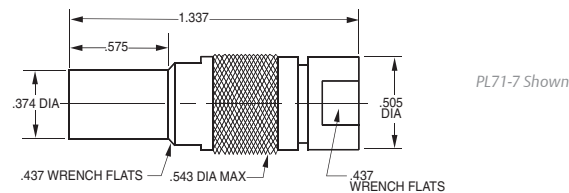


Termination

TPT-1-R

RFI Cap

RFI 70-1

For patch jack, no chain
For other chain options see page 58.

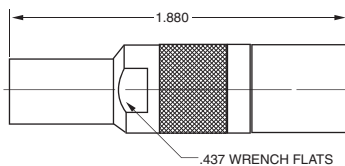


R = Resistance, 50, 75, 78 and 124 ohm standard
L = Length in Inches, 6, 12, 24, 36, 48, 60 standard
Z = Impedance in Ohms, 50, 75, 78 and 124 ohm standard


⚠ Refer to Cable Group Tables, pages 74-91.

Panels are on pages 51-54.

Twinax/Triax Connectors / Miniature Patching

Twinax Patch Plug


PL71L- 

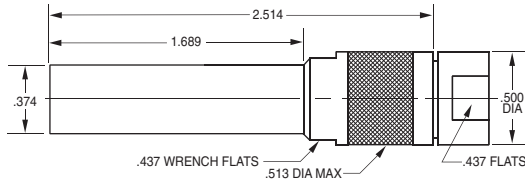

Twinax Patch Cord

Twinax..... PTWYL-L-Z


Triax..... PTRYL-L-Z



Twinax Patch Jack

TRB 3-Lug


J72L

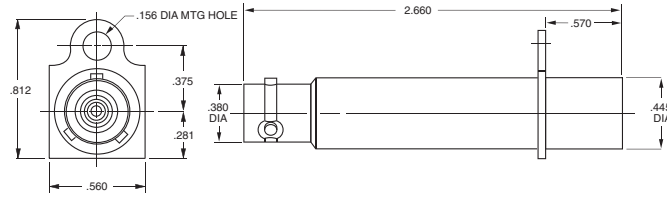

Looping Plug

Twinax..... LPTWL-Z



Triax..... LPTRL--Z

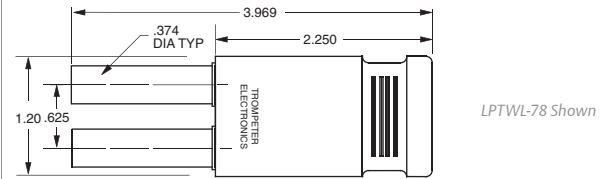

Front-loading Modular Panels

For use with J74MST-R Patch Jacks (pg. 13)

| Panel Dimensions | Modules/Panels | Jacks/Module | Jacks/Panel | Part Number |
|------------------|----------------|--------------|-------------|-----------------------|
| 19"x3.483" | 10 | 2 | 20 | 155-0830-1 (JSISM-60) |
| 19"x2.34" | 10 | 4 | 40 | JSISM-120 |

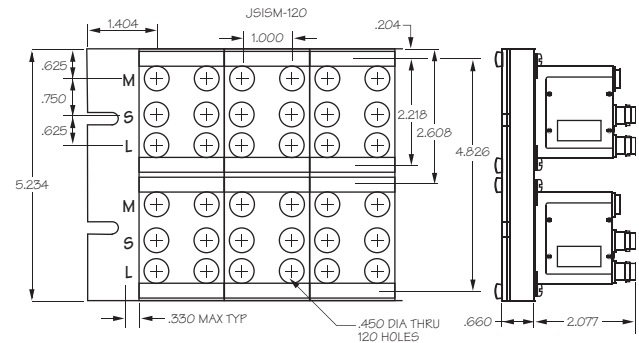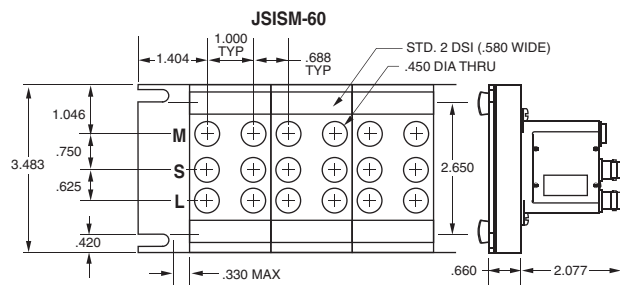

J74 Series



Trompeter's superior J74 Series of twinax/triax patch jacks provide a normal-thru signal path without the use of looping plugs or patch cords. Same body size as our J24 Series coax dual patch jacks.


It offers a self-wiping, self-normalizing switch with gold plated beryllium copper contacts, which provides positive electrical contact with 30,000 minimum mating cycles.

All metallic parts are machined, formed, or die-casted to extremely close tolerances which provide better intermateability improving EMI/RFI suppression and reduced signal loss. The TRB/TRT patch jack bodies are made of top-quality brass with a bright nickel-plated, non-tarnish finish, which resists tarnishing and the associated reduction of conductivity. Dielectrics are made of machined PTFE for superior dielectric properties and heat resistance. When you want performance and long-life, these patch jacks are what you need.

Monitor-Terminated Patch Jack


Use with Front Loading Modular Panels, see page 12.

J74MST-R

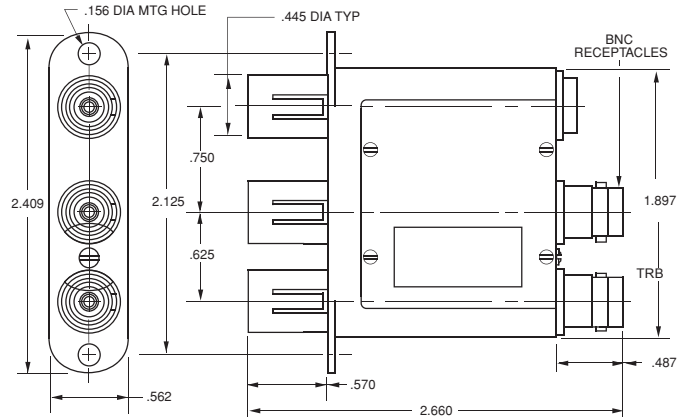

J74MST-R SCHEMATIC
Monitor-Terminated

Plugging into the source side provides a resistive load to the monitored side. Separate 20 dB isolator jack and TRB input jacks for monitoring of the normal-thru signal.



Normal-Thru Patch Jack

Self-terminating

J74T-R


Provides a resistive load to the unused side of the jack. Insertion of a patch plug into the source side automatically terminates the load side. Plugging into the load side automatically terminates the source side.

Dual Patch Jack

Normally-terminated


J74-2T-R

Provides a resistive load.

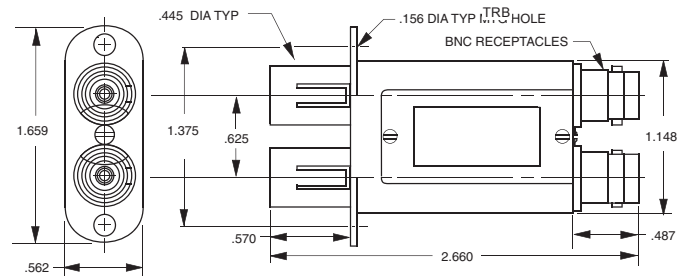

J74T-R
Self-Terminating

Provides a resistive load to the unused side of the jack. Insertion of a patch plug into the source side automatically terminates the load side. Plugging into the load side automatically terminates the source side.



J74-2T-R
Normally-Terminated


Provides a resistive load.

R-Resistance (1/2W, 1%). For standard panels see page 51.

Twinax/Triax Connectors / Subminiature Patching

Subminiature Patch Plug


PL150-

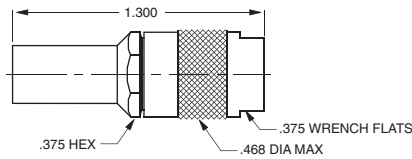

Subminiature Patch Jack

Cable Entry Mount on JSIX panels (For panels see pages 51-54)


J150-

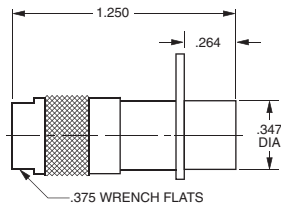

Subminiature Patch Jack

TRS 3-lug

J152

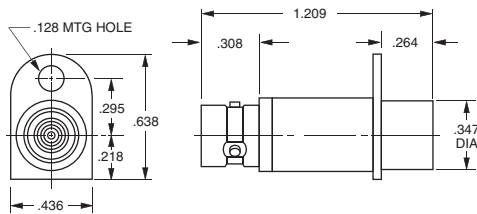


J152 Shown

RFI Cap

For subminiature patch jack, no chain.

RFI 150-1

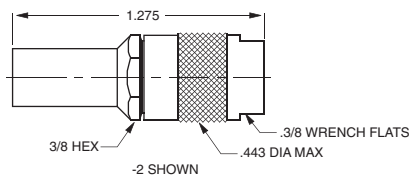


For other chain options see page 63.

Termination

For TRS* 3-lug jack, no chain.

TNGM1-1-R

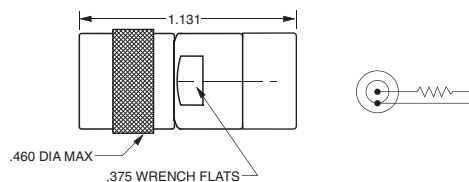


For other chain options see page 63.
*4-lug/threaded versions available

Subminiature Normal Through Twinax/Triax Patch Jack

Smallest twinax/triax patch jack

J158

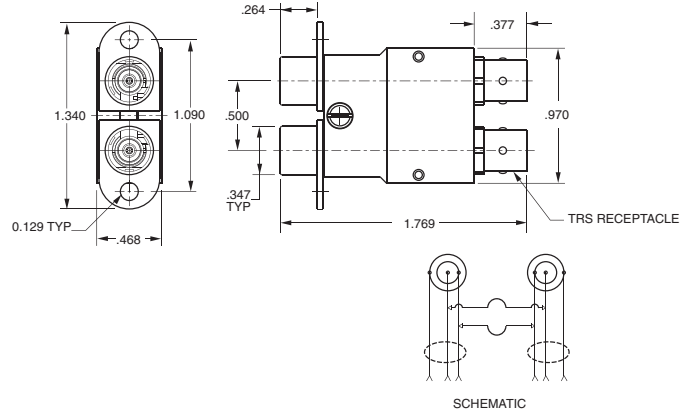


Patch Cord

Subminiature patch plug to subminiature patch plug

Triax 50Ω, 75Ω..... PTRM-L-Z

Twinax 75Ω, 124Ω..... PTWM-L-Z




Cable Assembly

Subminiature patch plug to TRS 3-lug plug, 4-lug/threaded versions available

Triax 50Ω, 75Ω..... PTRMX-L-Z

Twinax 75Ω, 124Ω..... PTWMX-L-Z




Cable Assembly

TRS* 3-lug plug to TRS* 3-lug plug, 4-lug/threaded versions available

Triax 50Ω, 75Ω..... PTRMY-L-Z

Twinax 75Ω, 124Ω..... PTWMY-L-Z




Cable Assembly

Metal junction, random paralleling

TRS* 3-lug plugs, 4-lug/threaded versions available

Twinax 78Ω, 124Ω, Triax 50Ω, 75Ω..... TNM3-Z

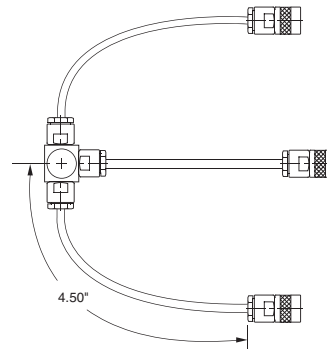


Refer to Cable Group Tables, pages 74-91.

For JSIX subminiature insulated panels see page 53. Other Terminations and RFI Caps, see page 57.

Standard Looping Plug

LPTW & LPTR Series


| Dash # | Model No | Color | Cable Type | Impd Ω |
|--------|----------|--------|------------|--------|
| -1 | LPTW-78 | Blue | Twinax | 78 |
| -2 | LPTW-124 | | | 124 |
| -3 | LPTR-50 | Yellow | Triax | 50 |
| -4 | LPTR-75 | | | 75 |

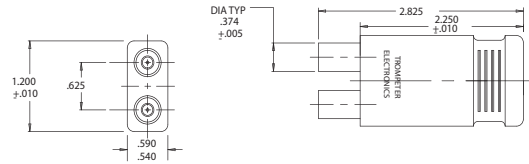

Standard Looping Plug

LPLTW & LPLTR Series


| Dash # | Model No | Color | Cable Type | Impd Ω |
|--------|-----------|--------|------------|--------|
| -1 | LPLTW-78 | Blue | Twinax | 78 |
| -3 | LPLTW-124 | | | 124 |
| -4 | LPLTR-50 | Yellow | Triax | 50 |
| -5 | LPLTR-75 | | | 75 |

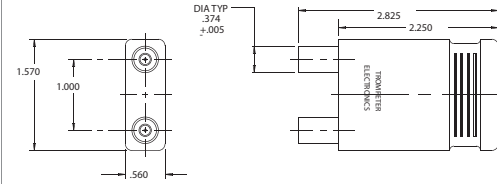

Standard Looping Plug with TRB Test

LPTWA, LPLTWA, LPTRA, & LPLTRA Series


| Dash # | Model No | Color | Type | Impd Ω | DIM A | DIM B |
|--------|------------|--------|--------|--------|-------|-------|
| -1 | LPTWA-78 | Blue | Twinax | 78 | .625 | 1.20 |
| -2 | LPLTWA-78 | | | | 1.000 | 1.57 |
| -3 | LPTWA-124 | | | .625 | 1.20 | |
| -4 | LPLTWA-124 | | | | | 1.000 |
| -5 | LPTRA-50 | Yellow | Triax | 50 | .625 | 1.20 |
| -6 | LPLTRA-50 | | | | 1.000 | 1.57 |
| -7 | LPTRA-75 | | | .625 | 1.20 | |
| -8 | LPLTRA-75 | | | | | 1.000 |

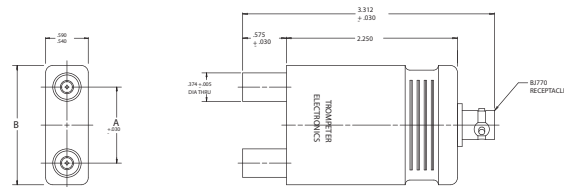

Standard Looping Plug

LPTWAL, LPLTVAL, LPTRAL, & LPLTRAL Series


| Dash # | Model No | Color | Type | Impd Ω | DIM A | DIM B |
|--------|-------------|--------|--------|--------|-------|-------|
| -1 | LPTWAL-78 | Blue | Twinax | 78 | .625 | 1.20 |
| -2 | LPLTVAL-78 | | | | 1.000 | 1.57 |
| -3 | LPTWAL-124 | | | .625 | 1.20 | |
| -4 | LPLTVAL-124 | | | | | 1.000 |
| -5 | LPTRAL-50 | Yellow | Triax | 50 | .625 | 1.20 |
| -6 | LPLTRAL-50 | | | | 1.000 | 1.57 |
| -7 | LPTRAL-75 | | | .625 | 1.20 | |
| -8 | LPLTRAL-75 | | | | | 1.000 |

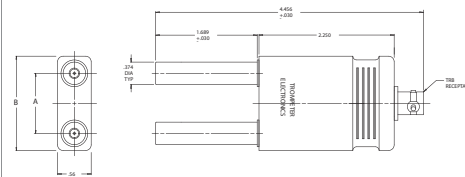

Standard Looping Plug with Two Tip Test Points

LPTW2TPL Series


| Dash # | Model No | Impd Ω | Color |
|--------|--------------|--------|-------|
| -1 | LPTW2TPL-78 | 78 | Blue |
| -2 | LPTW2TPL-124 | 124 | Blue |

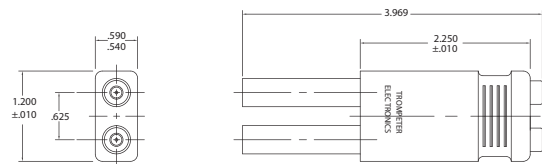

Standard Looping Plug

LPTWL & LPTRL Series


| Dash # | Model No | Color | Type | Impd Ω |
|--------|-----------|--------|--------|--------|
| -1 | LPTWL-78 | Blue | Twinax | 78 |
| -2 | LPTWL-124 | | | 124 |
| -3 | LPTRL-50 | Yellow | Triax | 50 |
| -4 | LPTRL-75 | | | 75 |

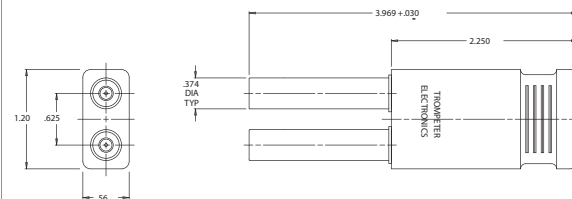

Standard Looping Plug with Two Tip Test Points

LPTW2TP Series


| Dash # | Model No | Impd Ω | Color |
|--------|-------------|--------|-------|
| -1 | LPTW2TP-78 | 78 | Blue |
| -2 | LPTW2TP-124 | 124 | Blue |

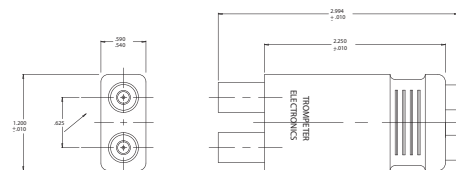

Standard Looping Plug

LPLTW2TP Series

| Dash # | Model No | Impd Ω | Color |
|--------|--------------|--------|-------|
| -1 | LPLTW2TP-78 | 78 | Blue |
| -2 | LPLTW2TP-124 | 124 | Blue |

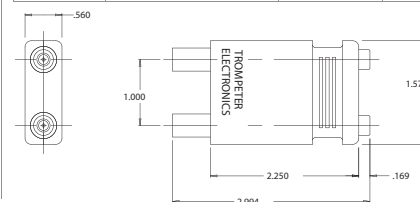

Twinax/Triax Connectors / Hermetically Sealed Connectors

Concentric Twinax/Triax

Hermetic seals prevent leakage through the bulkhead from inside of the connector. Trompeter's miniature size hermetically sealed connectors include the feed-through BJ78HS, the front mounted BJ77HS, the rear mounted BJ79HS and BJ379HS. In the subminiature size we offer the front mounted BJ157HS and BJ157FLHS (four lug version). The BJ3150HS and BJ3150SHS offer a threaded rear mount version with a safety wire option. These connectors have leakage rates of 1x10-8 atm cc/second. The 150 Series have leakage rates of 1x10-6 atm cc/second.

Features

- Standard TRB/MIL-C-49142
- Glass to Metal Seals
- Sustains Extreme Temperature Ranges
- Stainless Steel or Nickel Plated Brass Body
- Gold Plated Contacts




Benefits

- Mechanical and Environmentally Reliable Method
- Wide Range of Application Usage
- More Cost Effective than Stainless Steel
- Reliable Connections

Hermetically Sealed Bulkhead Jack

Subminiature Twinax/Triax

Rear Mount (A=.500)..... BJ3150HS
Solder Pot Bulkhead (A=.562)..... BJ3150SHS

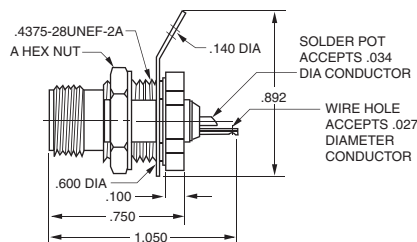


Mounting Hole: D4.200

Hermetically Sealed Bulkhead Jack

Front Mount
BJ77HS


Mounting Hole: D4.125

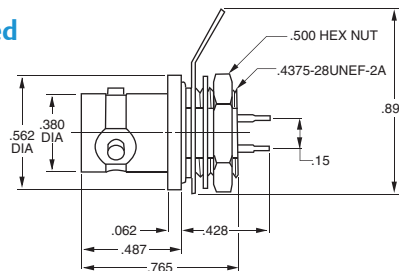

Hermetically Sealed Bulkhead Jack

3-lug..... BJ157HS
4-lug..... BJ157FLHS

Mounting Hole: D6.187

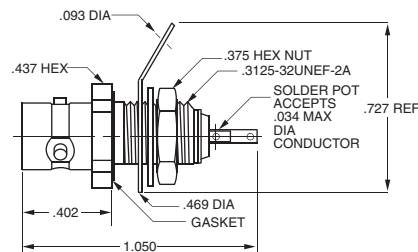


Hermetically Sealed Miniature Twinax/Triax

Feed-thru Bulkhead Mount
BJ78HS, BJ378HS
(Threaded Version Not Shown)

Mounting Hole: D3.187

Insulated Version
BJ73HS
(Not Shown)


Mounting Hole: D2.187



Hermetically Sealed Bulkhead Jack

Miniature Twinax/Triax TRT/Threaded

BJ376HS

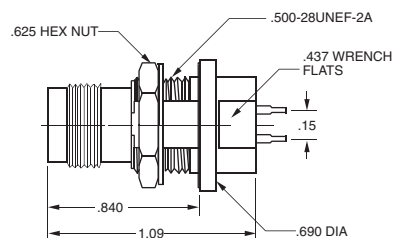


Mounting Hole: D3.160

Hermetically Sealed Miniature Twinax/Triax Rear Mount Bulkhead Jack

Rear Mount, Bulkhead Mount
BJ79HS

Mounting Hole: D3.160

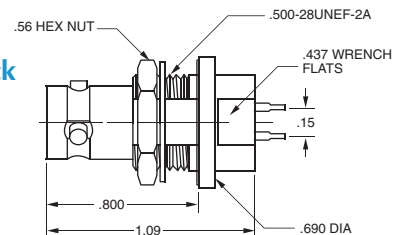

"D" mounting holes see page 54.

Note: Only a select few of our hermetically sealed connectors are shown here. Contact customer service for more information.

150 Series Miniature 2, 3, 4-lug, & Push-on (TRS)

3150 Series Miniature Threaded (TTM)

150/3150 Series are concentric twinax/triax connectors for high density and weight reduction applications. They are commonly used in digital data bus, video pair, MIL-STD-1553B (primary/redundant), baseband circuit and in any application for "noise-free guarded" circuits. TRS/TTM push-on connectors are designed for blind mate rack and panel applications. The male plug mates with any TRS/TTM jack and are ideally suited for test cable applications.



Features

- Same size as TPS/TCM connectors
- Solderable Wrench Crimp versions for cables with up to .215" outer diameter
- Tool Crimp versions for quick termination of cables with up to .250" outer diameter
- 3-lug, 4-lug, and threaded versions provide different levels of mechanical stability and keying
- Does not require mechanical alignment for mating
- Meets MIL-C-49142, 48-hour salt spray requirement
- Special plating available to satisfy MIL-STD-1344 500-hour salt spray requirement
- Push-on versions for test cable applications
- Fewer pieces to assemble
- Hermetically sealed versions available (see page 16)

Mating Twinax Size 8 Contacts


for Digital Data Bus Multi-pin Connectors

Socket..... SPC8S-201
Pin..... SPC8P-201


This pair of **scoop-proof** concentric contacts fits the Size 8 cavity of MIL-C-38999 series 1, 3, & 4 and MIL-STD-1760 "External Stores" type connectors.

Features

- Fits MIL-C-17/176-00002 and other twinax/triax cables
- Heat treated **beryllium copper** spring members
- **Gold plated, Full Crimp** contacts

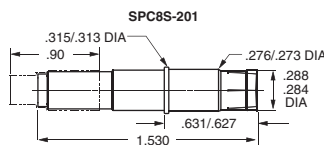

SPC8S-201 Shown

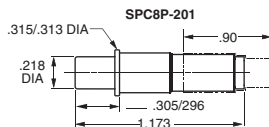

SPC8P-201 Shown



Twinax/Triax Connectors / Subminiature Jacks & Plugs

150/3150 Series TRS/TTM

Sub-miniature Jacks & Plugs


Sub-miniature concentric twinax/triax connectors increase packing density up to 246%. They are designed for high density applications where digital, video pair or baseband noise-free guarded circuits are required. The 3-lug, 4-lug, and threaded versions improve mechanical stability and provide "error-free" redundant data bus capabilities. The wrench crimp version accommodates cables with other jacket diameters up to .215" and the tool crimp versions up to .250".



Cable Plug

Wrench Crimp

- 3-Lug..... PL155-⚠
- 4-Lug..... PL155FL-⚠
- Threaded..... PL3155-⚠

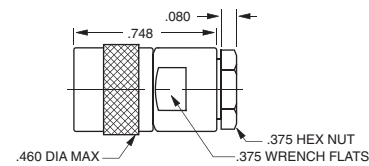


PL155-29 Shown

Bulkhead Jack

Rear Mount, Wrench Crimp

- 3-Lug..... BJ159-⚠
- 4-Lug..... BJ159FL-⚠
- Threaded..... BJ3159-⚠




BJ159-29 Shown
Mounting Hole: D4.125

Cable Plug

Tool Crimp

- 3-Lug..... PL155AC-⚠
- 4-Lug..... PL155ACFL-⚠
- Threaded..... PL3155AC-⚠




PL155AC-207 Shown

Bulkhead Jack

Rear Mount, Tool Crimp

- 3-Lug..... BJ159AC-⚠
- 4-Lug..... BJ159ACFL-⚠
- Threaded..... BJ3159AC-⚠




BJ159AC Shown
Mounting Hole: D4.125

Right Angle Cable Plug

Tool Crimp

- 3-Lug..... PLR155AC-⚠
- 4-Lug..... PLR155ACFL-⚠
- Threaded..... PL33155AC-⚠

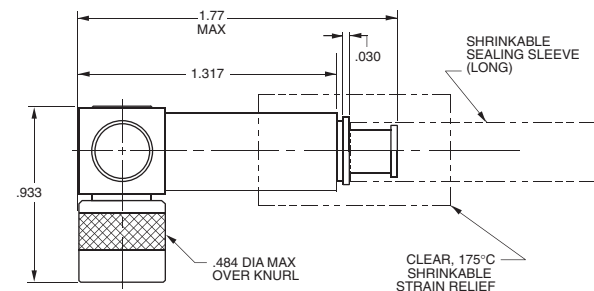


PLR155AC-201 Shown

Cable Jack

Wrench Crimp

- 3-Lug..... CJ150-⚠
- 4-Lug..... CJ150FL-⚠
- Threaded..... CJ3150-⚠




CJ150-29 Shown

Cable Jack

Tool Crimp

- 3-Lug..... CJ150AC-⚠
- 4-Lug..... CJ150ACFL-⚠
- Threaded..... CJ3150AC-⚠

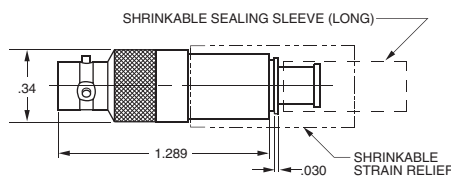


CJ150AC-207 Shown

⚠ Refer to Cable Group Tables, pages 74-91.
"D" mounting holes see page 54.

Front Mount Bulkhead Jack

Rear Mount, Solder Pot

- 3-Lug..... BJ157
- 4-Lug..... BJ157FL
- Threaded..... BJ3157

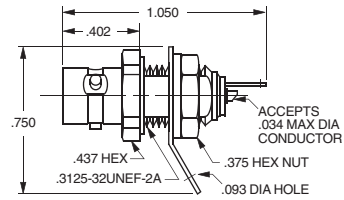


BJ157 Shown
(Hermetically sealed version available, pg.16)
Mounting Hole: D6.187

Bulkhead Jack

Rear Mount, Solder Pot

- 3-Lug..... BJ150
- 4-Lug..... BJ150FL
- Threaded..... BJ3150




BJ150 Shown
Mounting Hole: D4.250

Bulkhead Jacks

Flange Mount, Solder Pot

- 3-Lug..... BJ157F
- 4-Lug..... BJ157FFL
- Threaded..... BJ3157F


| Hole Configuration | # of Holes/Type-Dimension | |
|--------------------|----------------------------|--------|
| A Dim = .425 | 2/Clear - .103" Diameter | -2C(S) |
| | 2/Threaded - .099-56UNF-UB | -2T(S) |
| B Dim = .687 | 4/Clear - .103" Diameter | -4C(S) |
| | 4/Threaded - .099-56UNF-UB | -4T(S) |

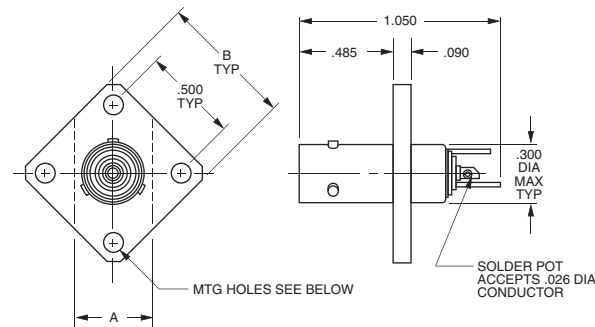

BJ157F Shown
(S) = Comes with Stainless Steel Phillips #3-56 Pan Head Screws
Maximum Panel Thickness .187

Feed-Through Jack

- 3-Lug..... BJ158
- 4-Lug..... BJ158FL
- Threaded..... BJ3158




BJ158 Shown
Mounting Hole: D5.190/D4.190 (Threaded)

Insulated Bulkhead Jack

Rear Mount, Tool Crimp

- 3-Lug..... BJ154AC-⚠
- 4-Lug..... BJ154ACFL-⚠
- Threaded..... BJ3154AC-⚠

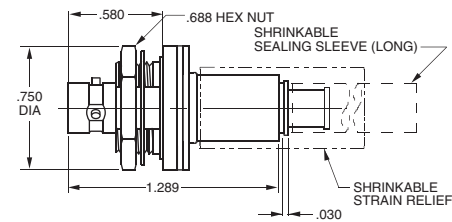


BJ154AC Shown
Mounting Hole: D9.116

Insulated Bulkhead Jack

Front Mount, Solder Pot


- 3-Lug..... BJ152
- 4-Lug..... BJ152FL
- Threaded..... BJ3152

BJ152 Shown
Mounting Hole: D9.208

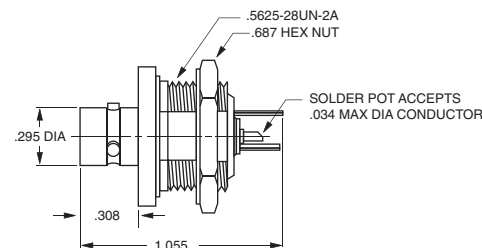

Insulated Feed-Through Jack

- 3-Lug..... BJ153
- 4-Lug..... BJ153FL
- Threaded..... BJ3153



BJ153 Shown
Mounting Hole: D9.116

⚠ Refer to Cable Group Tables, pages 74-91.


"D" mounting holes see page 54.

Twinax/Triax Connectors / Subminiature

150/3150 Series


Circuit Board Jack

- 3-Lug..... CBJ157
- 4-Lug..... CBJ157FL
- Threaded..... CBJ3157

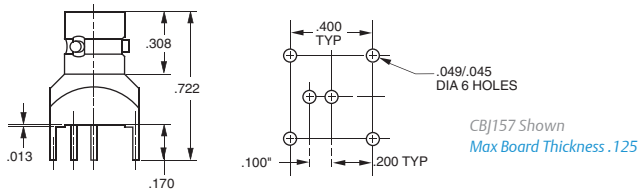


Push-on Cable Plug

- Wrench Crimp
- PL153-

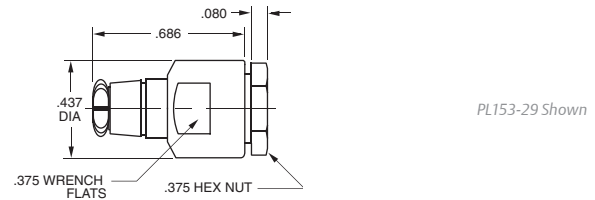


Right Angle Circuit Board Jack

- 3-Lug..... CBJR157
- 4-Lug..... CBJR157FL
- Threaded..... CBJR3157

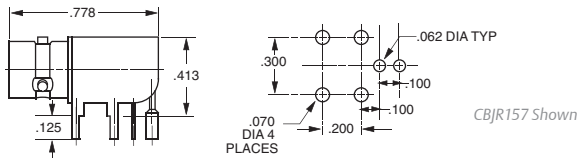


Twinax/Triax TRS Subminiature

- Right Angle Bulkhead Rear Mount 3-Lug
- CBBJR159

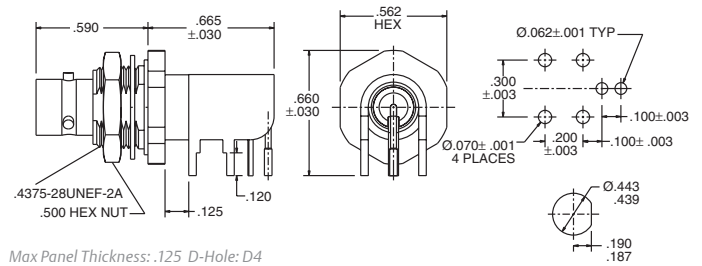

"T" Adapter


- 3-Lug..... BN153
- 4-Lug..... BN153FL
- Threaded..... BN3153

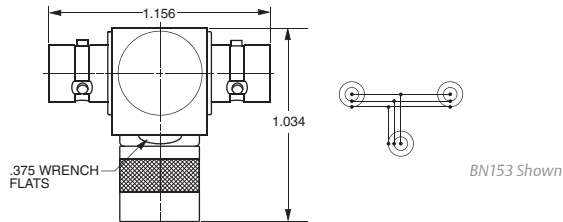

TRS/TTM Coupling Adapter

Barrel Connector

- 3-Lug..... AD158
- 4-Lug..... AD158FL
- Threaded..... AD3158

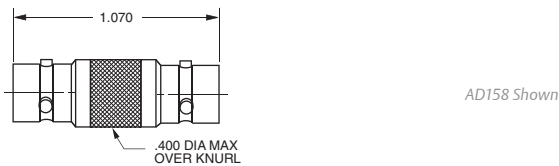

Refer to Cable Group Tables, pages 74-91.
 "D" mounting holes see page 54.

450 Series Subminiature Twinax 3-lug & 4-lug

3450 Series Subminiature Twinax Threaded

Concentric connectors designed for MIL-STD-1553B airborne digital databus weight reduction applications.

Features

- 3-lug, 4-lug & threaded versions
- Field installation full crimp design. No soldering required
- Fully inspectable assembly process (no blind or questionable solder connections)
- Total of ten polarized & keyed combinations
- Three different keyings for 3-lug versions
- Two interchangeable pin & socket arrangements
- Fewer pieces to assemble
- Meets MIL-C-49142, 48-hour salt spray requirement
- Standard plating to satisfy MIL-STD-1344, 500-hour salt-spray requirement
- Weatherproof designs utilize sealing gaskets and heat shrink tubing
- Fits MIL-C-17/176-00002 & other twinax/triax cables
- Compatible with Raychem designs utilizing military crimp style connectors



80 Series Standard 2-lug & 3-lug (TRC)

380 Series Standard Threaded (TRN)

Used in digital data bus, video pair, MIL-STD-1553B (primary/redundant data bus), MIL-STD-1397 (shipboard data bus), baseband circuit and any application for noise-free guarded circuits.



Features

- Standard "C" sized concentric connectors
- Used with larger twinax/triax cables with outer diameters of .250"-615"
- Does not require mechanical alignment for mating

30 Series Miniature 2-Pin Polarized, 2-lug (TWBNC)

Used in digital data bus, video pair, MIL-STD 1553B (airborne/ground primary/redundant), baseband circuit and any application for "noise-free guarded" circuits. They are not recommended for new designs. MIL-STD-1553B permits designer discretion for use of concentric designs in lieu of the two-pin connector.



Features


- Same size as BNC/TNC connectors
- Fully enclosed beryllium copper spring fingers
- Stepped Dielectric

Twinax/Triax Connectors / Concentric Twinax

450 Series

Concentric Twinax 450 Series

3-lug & 4-lug Keyings

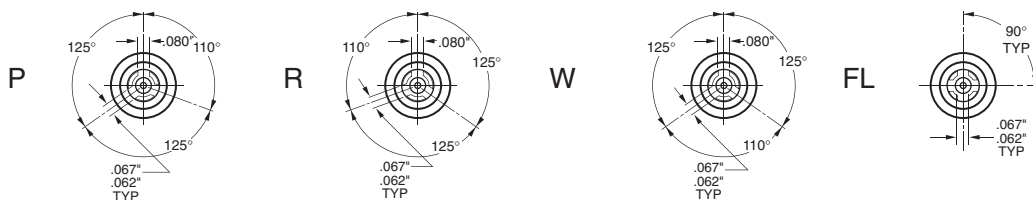

The 450 Series was designed for airborne digital data bus applications utilizing the MIL-STD-1553B data bus. The 450 Series will fit most twinax cables. Connectors are available in five

different coupling configurations which include 3-lug versions with three (3) separate keyings, a 4-lug, and a threaded version with safety wire holes.

Diagrams shown above are for plugs.
Refer to page 23 for photo of intermediate contacts.

Bulkhead Jack


Rear mount,
Solder pot

Mounting

Holes:

DD8.130

DD8.125 (Threaded)

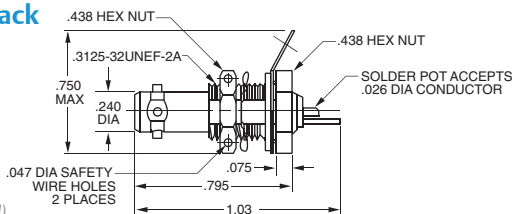

Coupling
Type

Key
Code

Intermediate
Contact Pin

Socket

3-lug

P

BJ450PP

BJ450PS

3-lug

R

BJ450RP

BJ450RS

3-lug

W

BJ450WP

BJ450WS

4-lug

FL

BJ450FLP

BJ450FLS

Threaded

-

BJ3450P

BJ3450S

Bulkhead Jack


Front mount,
Solder pot

Mounting

Holes:

DD8.250

DD8.125 (Threaded)

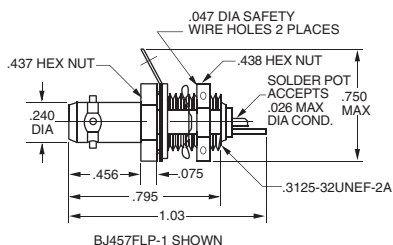

Coupling
Type

Key
Code

Intermediate
Contact Pin

Socket

3-lug

P

BJ457PP

BJ457PS

3-lug

R

BJ457RP

BJ457RS

3-lug

W

BJ457WP

BJ457WS

4-lug

FL

BJ457FLP

BJ457FLS

Threaded

-

BJ3457P

BJ3457S

Right Angle Cable Plug


All Crimp

Mounting

Holes:

DD8.130

DD8.125 (Threaded)

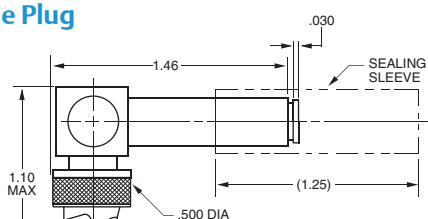

Coupling
Type

Key
Code

Intermediate
Contact Pin

Socket

3-lug

P

PLR455ACPP-⚠

PLR455ACPS-⚠

3-lug

R

PLR455ACRP-⚠

PLR455ACRS-⚠

3-lug

W

PLR455ACWP-⚠

PLR455ACWS-⚠

4-lug

FL

PLR455ACFLP-⚠

PLR455ACFLS-⚠

Threaded

-

PLR3455ACP-⚠

PLR3455ACS-⚠

RFI Jack Caps & Bulkhead Jack Terminations

For use with 450 Series Plugs

Rear Mount

Coupling
Type

RFI
Caps

Intermediate
Contact Pin

Socket

3-lug

RFI457-⚠

TBJ451P-⚠-R

TBJ451S-⚠-R

3-lug

RFI457-⚠

TBJ451P-⚠-R

TBJ451S-⚠-R

3-lug

RFI457-⚠

TBJ451P-⚠-R

TBJ451S-⚠-R

4-lug

RFI457FL-⚠

TBJ451FLP-⚠-R

TBJ451FLS-⚠-R

Threaded

RFI3457-⚠


TBJ3451P-⚠-R

TBJ3451S-⚠-R

⚠ Refer to Cable Group Tables, pages 74-91.

⚠ Chain options see page 57. "D" mounting holes see page 54.

450 Series Intermediate Contact Assemblies

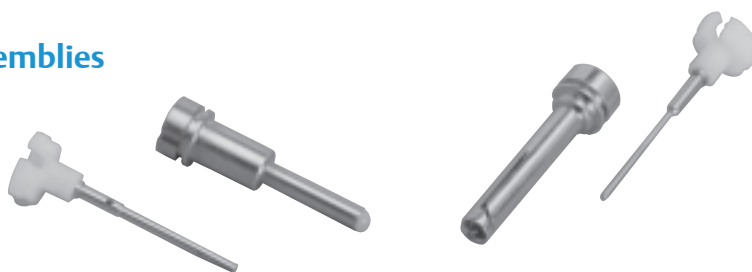

Pin/Socket PS450AC-△


Socket/Pin SP450AC-△

The 450 Series includes cable jacks and plugs with interchangeable contact assemblies. The contact and body assemblies may be ordered separately (see the facing page). Cable connectors accept cables with a maximum outer diameter of .180" and conductors to .025".

Contact customer service for exact specifications. For Trompetter connectors which meet outgassing requirements, contact our technical support staff for more information. Compatible with Raychem DK-621 Series. [Refer to page 22 for Keyings.](#)

Bulkhead Cable Jack

Rear mount, All Crimp

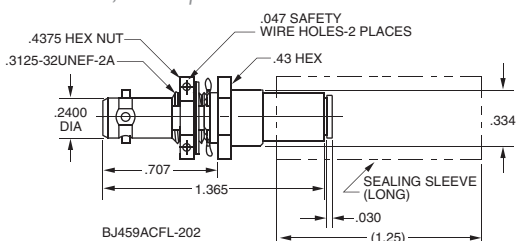


Mounting Holes: DD8.156, DD8.125 (Threaded)

| Coupling Type | Key Code | Body Assembly Only | Assembly Intermediate Contact Pin | Socket |
|---------------|----------|--------------------|-----------------------------------|--------------|
| 3-lug | P | BJ459ACP-△ | BJ459ACPP-△ | BJ459ACPS-△ |
| 3-lug | R | BJ459ACR-△ | BJ459ACRP-△ | BJ459ACRS-△ |
| 3-lug | W | BJ459ACW-△ | BJ459ACWP-△ | BJ459ACWS-△ |
| 4-lug | FL | BJ459ACFL-△ | BJ459ACFLP-△ | BJ459ACFLS-△ |
| Threaded | - | BJ3459AC-△ | BJ3459ACP-△ | BJ3459ACS-△ |

Cable Jack


All Crimp

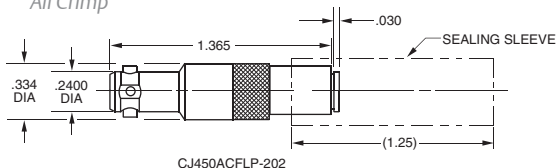

| Coupling Type | Key Code | Body Assembly Only | Assembly Intermediate Contact Pin | Socket |
|---------------|----------|--------------------|-----------------------------------|--------------|
| 3-lug | P | CJ450ACP-△ | CJ450ACPP-△ | CJ450ACPS-△ |
| 3-lug | R | CJ450ACR-△ | CJ450ACRP-△ | CJ450ACRS-△ |
| 3-lug | W | CJ450ACW-△ | CJ450ACWP-△ | CJ450ACWS-△ |
| 4-lug | FL | CJ450ACFL-△ | CJ450ACFLP-△ | CJ450ACFLS-△ |
| Threaded | - | CJ3450AC-△ | CJ3450ACP-△ | CJ3450ACS-△ |

Cable Plug

All Crimp

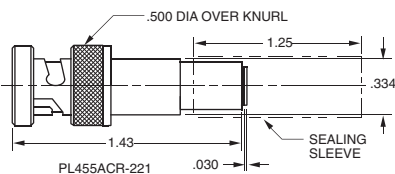

| Coupling Type | Key Code | Body Assembly Only | Assembly Intermediate Contact Pin | Socket |
|---------------|----------|--------------------|-----------------------------------|--------------|
| 3-lug | P | PL455ACP-△ | PL455ACPP-△ | PL455ACPS-△ |
| 3-lug | R | PL455ACR-△ | PL455ACRP-△ | PL455ACRS-△ |
| 3-lug | W | PL455ACW-△ | PL455ACWP-△ | PL455ACWS-△ |
| 4-lug | FL | PL455ACFL-△ | PL455ACFLP-△ | PL455ACFLS-△ |
| Threaded | - | PL3455AC-△ | PL3455ACP-△ | PL3455ACS-△ |

RFI Plug Caps & Terminations

Plugs for use with 450 Series Jacks

| Coupling Type | RFI Caps | Intermediate Contact Pin to mate with Sockets | Sockets to mate with Pins |
|---------------|------------|---|---------------------------|
| 3-lug | RFI455-△ | TNG451P-△-R | TNG451S-△-R |
| 3-lug | RFI455-△ | TNG451P-△-R | TNG451S-△-R |
| 3-lug | RFI455-△ | TNG451P-△-R | TNG451S-△-R |
| 4-lug | RFI455FL-△ | TNG451FLP-△-R | TNG451FLS-△-R |
| Threaded | RFI3455-△ | TNG3451P-△-R | TNG3451S-△-R |


△ Chain options see page 57. "D" mounting holes see page 54.

Twinax/Triax Connectors / Standard Threaded

80/380 Series, TRC/TRN

Cable Plug

- 2-lug..... PL80-
- 3-lug..... PL803-
- Threaded..... PL380-

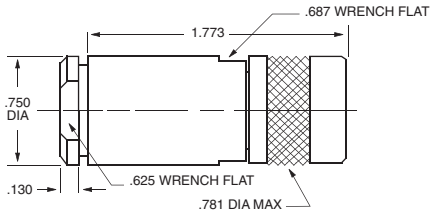


PL80 Shown
Larger bodies available to accommodate cable sizes, contact customer service.

Cable Jack

Wrench Crimp

- 2-lug..... CJ80-
- 3-lug..... CJ803-
- Threaded..... CJ380-

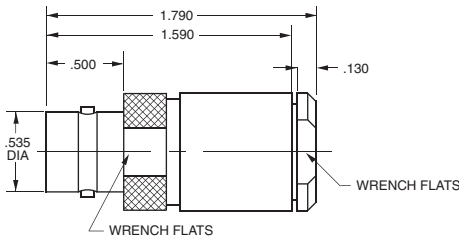

CJ80 Shown


Bulkhead Cable Jacks

Wrench Crimp, Flange Mount


- 2-lug..... BJ89F-
- 3-lug..... BJ893F-
- Threaded..... BJ389F-

Wrench Crimp, D Hole Mount

- 2-lug..... BJ89-
- 3-lug..... BJ893-
- Threaded..... BJ389-

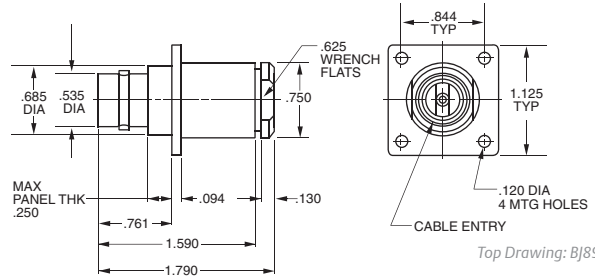

Top Drawing: BJ89F Shown




Bottom Drawing: BJ89 Shown
Mounting Holes: DD6.250 / D11.250 - Cable Groups: -14A, -16, -61, -62

Bulkhead Jack

Solder Pot

- 2-lug..... BJ80
- 3-lug..... BJ803
- Threaded..... BJ380

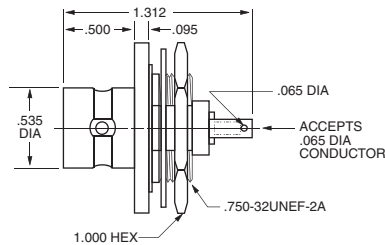


BJ80 Shown
Mounting Hole: D1.156

TRC "T" Adapter

- 2-lug..... BN83-1
- 3-lug..... BN833-1
- Threaded... BN383-1


BN83-1 Shown

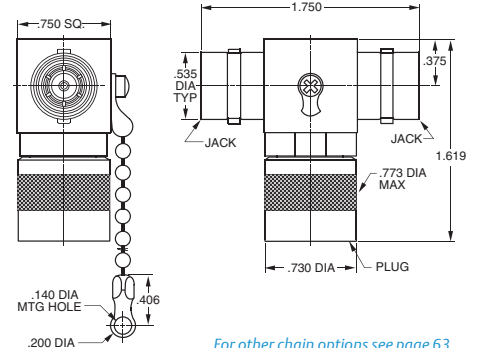

For other chain options see page 63.

Feed-thru Jack

- 2-lug..... BJ88
- 3-lug..... BJ883
- Threaded..... BJ388



BJ88 Shown
Mounting Hole: D1.343


Refer to Cable Group Tables, pages 74-91.
"D" mounting holes see page 54.

Mil-C-3655 Interface

Cable Plug

Wrench Crimp, Two-pin Polarized

2-lug..... PL30-

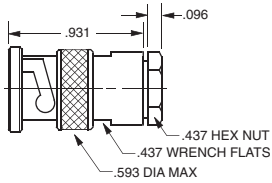


PL30 Shown

Bulkhead Jack

Front Mount, Solder Pot, Two-pin Polarized

2-lug..... BJ30




BJ30 Shown
Mounting Hole: D5.130

Feed-Through Jack

Two-pin Polarized

2-lug..... BJ38

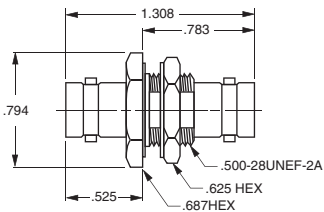


BJ38 Shown
Mounting Hole: D3.160

Circuit Board Bulkhead Jack

Right Angle-Two-pin Polarized Twinax (TWBNC)

CBBJR39A

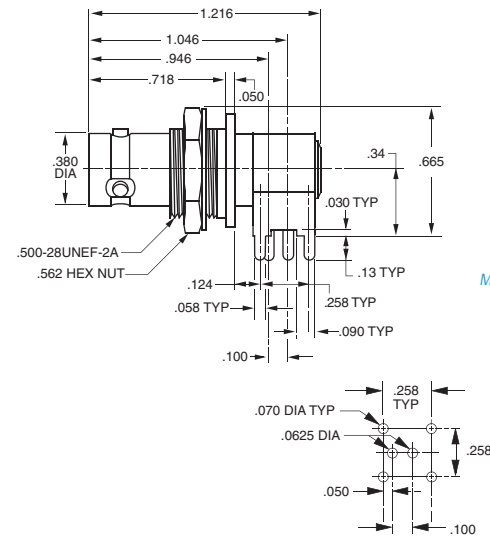


Mounting Hole: D3.125

Bulkhead Jack

Rear Mount, Solder Pot

Two-pin Polarized

2-lug..... BJ31

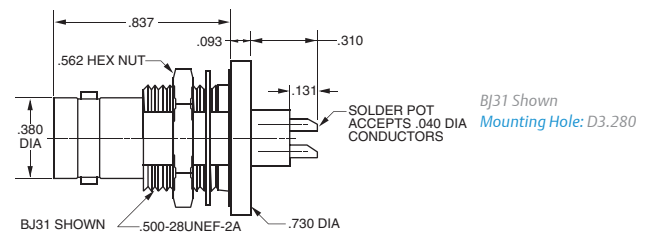


BJ31 Shown
Mounting Hole: D3.280

Bulkhead Cable Jack

Rear Mount, Wrench Crimp

Two-pin Polarized

2-lug..... BJ39-

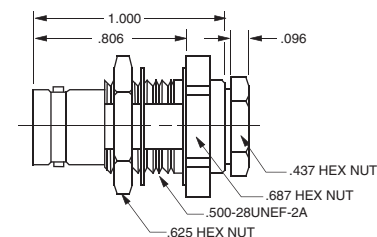

BJ39 Shown
Mounting Hole: D3.218

Refer to Cable Group Tables, pages 74-91.


"D" mounting holes are on page 54. Note: Only 30 Series have two-pin polarizations.

Note: These connectors are still available, although we recommend using concentric (70 series) twinax for all new applications.

Coax Connectors / BNC Coax Connector Introduction

Trompeter's BNC Coax Tool Crimp Connector

19 reasons why our BNC connectors outperform the competition every time!

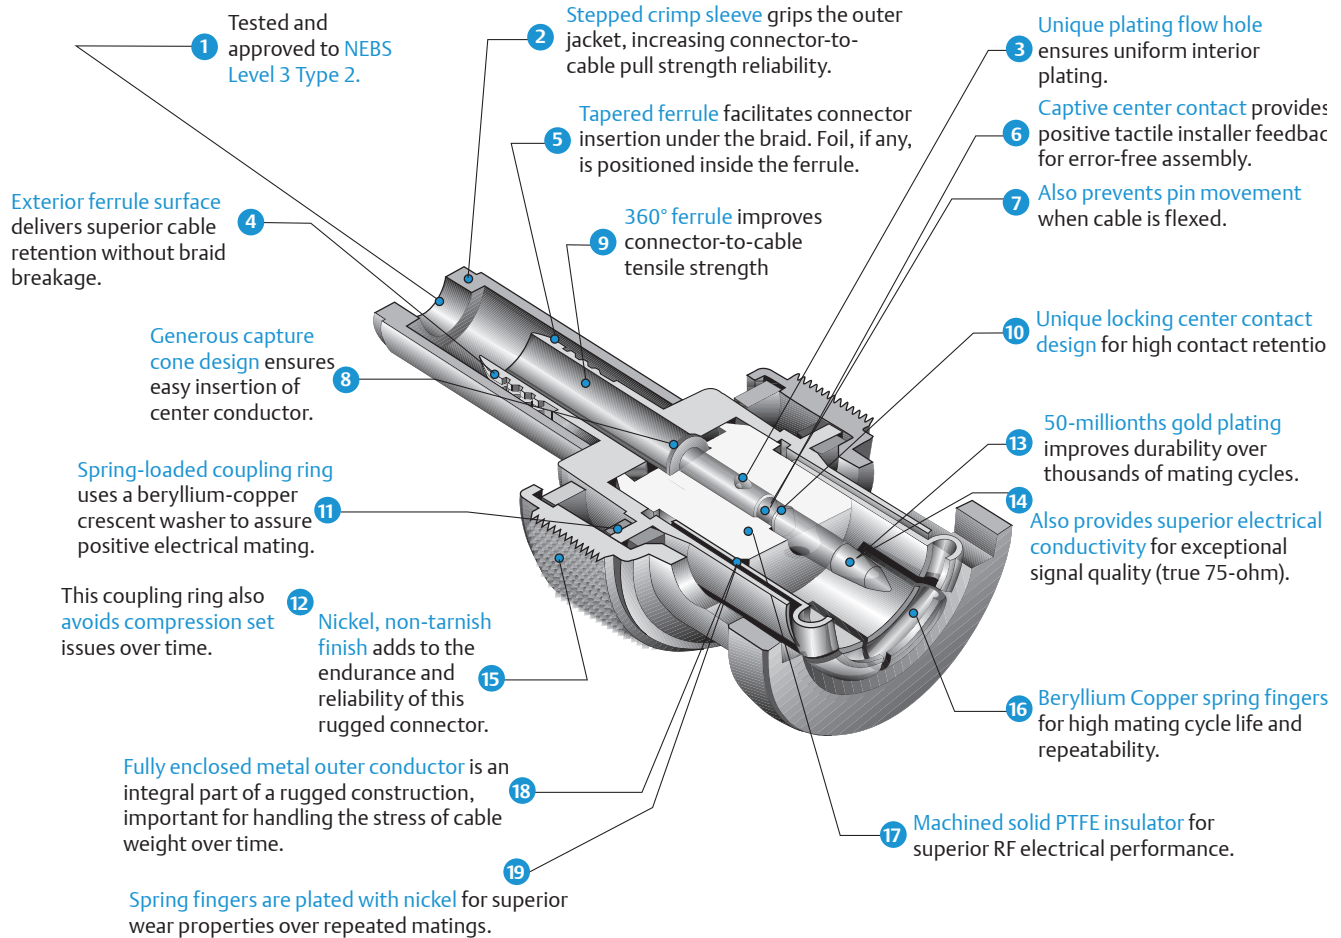

BNC Coax Wrench Crimp Connector

Wrench Crimp Features


- 3-piece construction
- Captive center contact pin in cone assembly
- Spring-loaded coupling ring using a beryllium-copper crescent washer
- Freely rotating captured insert inside the clamp-nut assembly
- Stepped captured insert inside the clamp-nut assembly
- 360° metal-to-metal, sandwich braid capture of the outer-braid-to-cone assembly. (No insulation between the clamping surfaces)
- Machined barb on the end of the cone assembly



SureNotch™ BNC

The **UPL220 Series** and the **UPL250 Series** feature **SureNotch™**, Trompeter's innovative solution for incomplete connector mating. **SureNotch™** provides immediate and reliable visual confirmation of secure mating. The **UPL250 Series Mini-BNC Series** allow higher interconnect density, enabling 40% more interconnects in the same area, with all the positive characteristics of the full size BNC.

- Telco BNC
- SureNotch™ BNC provides visual indicator that every BNC is locked onto the mating jack
- Black spring water highlights the notch
- Standard feature on all Trompeter Telco 75 Ohm BNC's

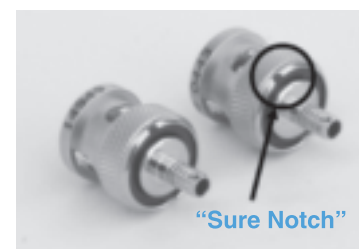


Hermetically Sealed Coax Connectors available, contact customer service.

Cable Plug

Tool Crimp


- 50Ω..... PL220-⚠
- 75Ω..... UPL220-⚠

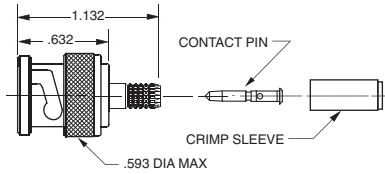

Cable Jack

Wrench Crimp


- 50Ω..... CJ20-⚠
- 75Ω..... UCJ20-⚠

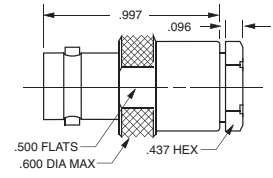

Cable Plug

Wrench Crimp


- 50Ω..... PL20-⚠
- 75Ω..... UPL20-⚠

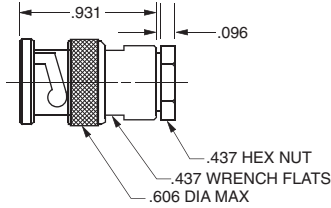

Cable Jack

Tool Crimp


- 50Ω..... CJ220-⚠
- 75Ω..... UCJ220-⚠

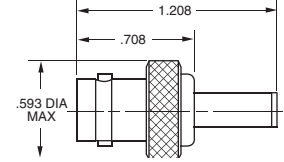

Bulkhead Plug

Front Mount, Solder Pot

- 50Ω..... PL21
- 75Ω..... UPL21

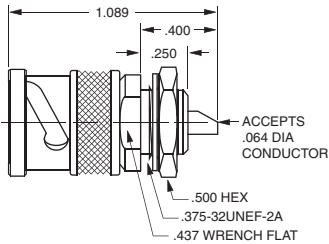


Mounting Hole: C2.085

Bulkhead Cable Jack

Rear Tool Crimp

- 50Ω..... BJ220-⚠
- 75Ω..... UBJ220-⚠




Mounting Hole: D3.100

BNC Adapter

Male to Female Right Angle

- 75Ω BNC..... UADRMF220




Cable Plug

90° Right Angle, Full Crimp

- 75Ω..... UPLR220-⚠


45° Angle, Full Crimp

- 75Ω..... UPLFF220-⚠

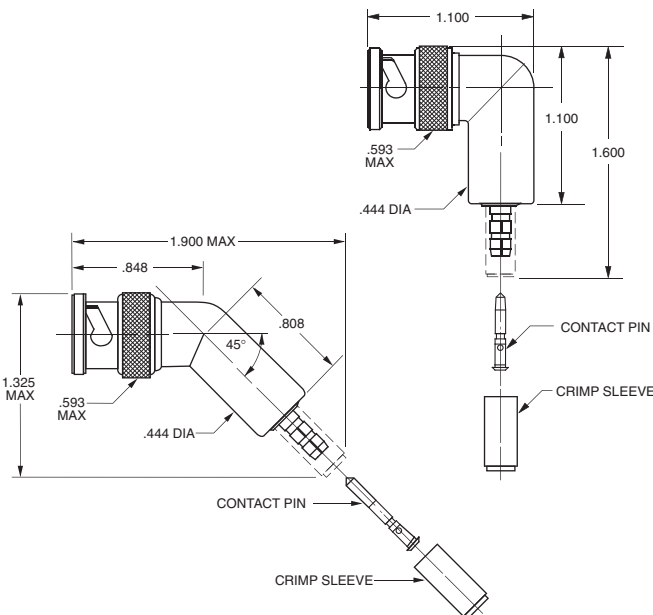

BNC "T" Adapter


- 50Ω..... BN23
- 75Ω..... UBN23



BNC Coupling Adapter

Barrel connector

- 50Ω..... AD228
- 75Ω..... UAD228

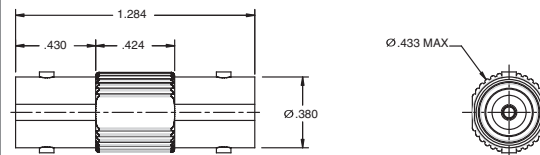

⚠ Refer to Cable Group Tables, pages 74-91.

"D" mounting holes are on page 54.


Coax Connectors / Miniature Coax 20/220 Series

BNC Bulkhead Jacks

Insulated Bulkhead Cable Jack

Wrench Crimp, Rear Mount

- 50Ω..... BJ26-
- 75Ω..... UBJ26-

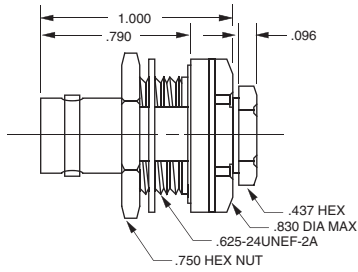


Mounting Hole: D2.187
GF-Ground filter version page 35

Non-insulated Bulkhead Jack

Feed-through

- 50Ω..... BJ224
- 75Ω..... UBJ224

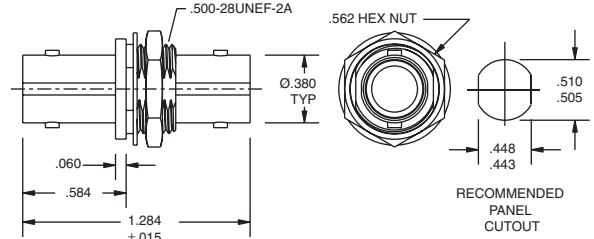


Mounting Hole: DD3.156

Insulated Bulkhead Jack

Front Mount, Solder Pot

- 50Ω..... BJ227
- 75Ω..... UBJ227

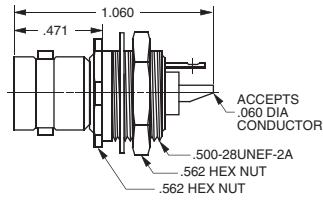


Mounting Hole: D3.147

Insulated Bulkhead Jack

Recessed Insulated Adapter (RIA) Feed-through

- 75Ω..... UBJ224-RIA

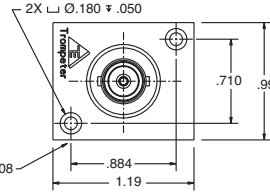


Bulkhead Cable Jack

Rear Mount, Wrench Crimp

- 50Ω..... BJ29-
- 75Ω..... UBJ29-

Mounting Holes: D3.218 (D2.218-Cable Groups 6, 6E, 51, 52)




Bulkhead Jack

Front Mount, Solder Pot

- 50Ω..... BJ20
 - 75Ω..... UBJ20
- w/Solder Lug
- 50Ω..... BJ20SL
 - 75Ω..... UBJ20SL

Mounting Hole: D5.125




Bulkhead Jack

Non-insulated

- 50Ω..... BJ23
- 75Ω..... UBJ23

Mounting Hole: D3.147




Insulated Bulkhead Jack

Feed-through

- 50Ω..... BJ228
- 75Ω..... UBJ228

Mounting Hole: DD3.156

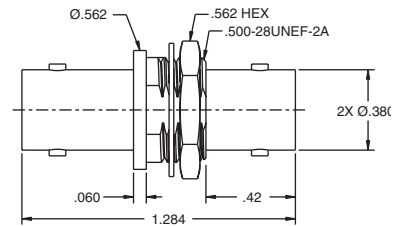


Insulated Bulkhead Cable Jack

Rear Mount, Solder Pot

- 50Ω..... BJ21
- 75Ω..... UBJ21

Mounting Hole: D3.147

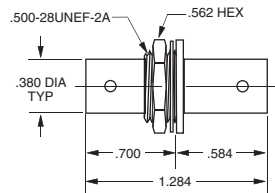

Bulkhead Jack

Feed-through Non-insulated

- 50Ω..... BJ24
- 75Ω..... UBJ24


Mounting Hole: DD3.100, (Hermetically sealed version available, call customer service).

Insulated Bulkhead Jack

Feed-through

- 50Ω..... BJ28
- 75Ω..... UBJ28


Mounting Hole: D3.156 (Hermetically sealed version available, call customer service).
GF-Ground Filter version available page 370c.

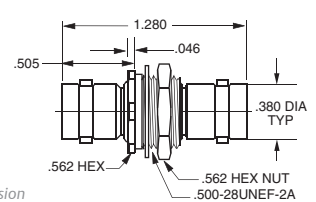

Refer to Cable Group Tables, pages 74-91.
"D" mounting holes are on page 54.

Edge Mount Circuit Board Jacks


Trompeter manufactures a wide selection of circuit board jacks.

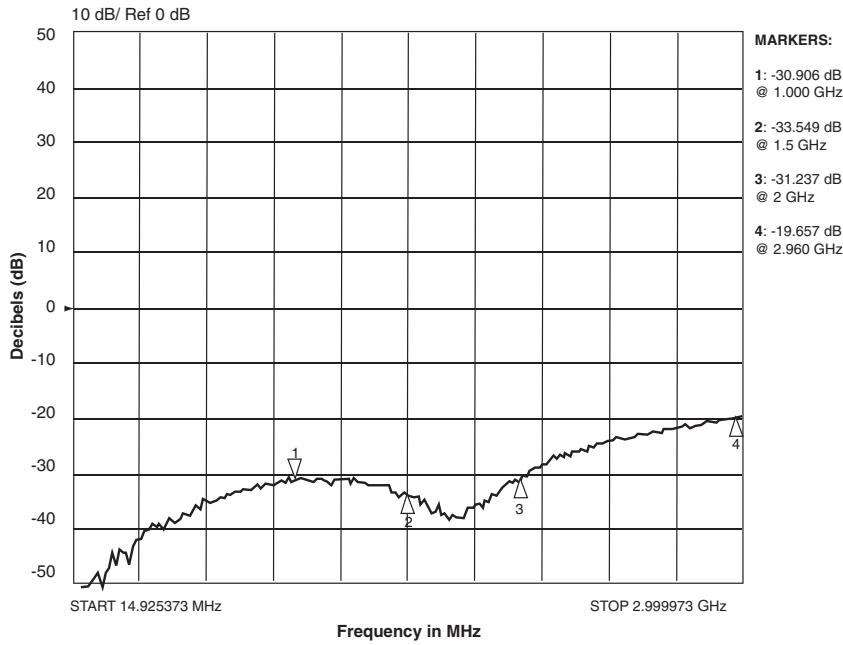

Circuit Board Edge Mount

Coax "BNC" Style Receptacle 75Ω

| Part Number | Board Thickness |
|-------------|-----------------|
| UCBJE20-1 | .060-.064 |
| UCBJE20-2 | .028-.033 |

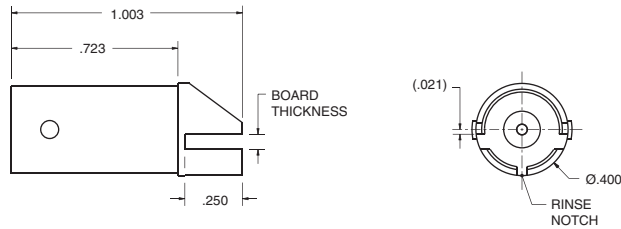


Circuit Board Bulkhead Edge Mount

Coax "BNC" Style Receptacle 75Ω

Max Panel Thickness: .179

| Part Number | Board Thickness |
|-------------|-----------------|
| UCBBJE20-1 | .060-.064 |
| UCBBJE20-2 | .028-.033 |
| UCBBJE20-3 | .084 |
| UCBBJ320-4 | .120 |

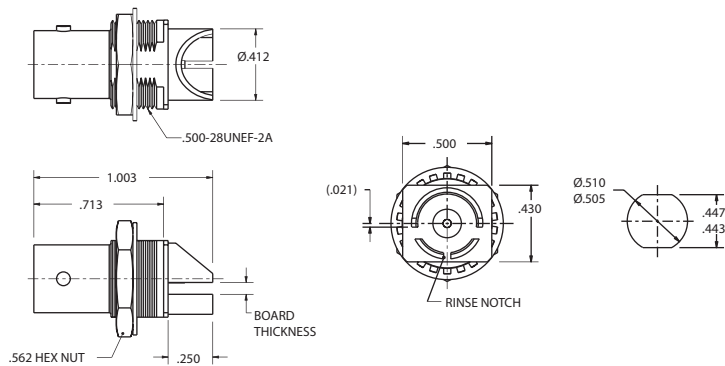

Coax Connectors / Coax 20/220 Series


Circuit Board Jacks

Trompeter manufactures a wide selection of circuit board jacks, Shown below are the most commonly requested designs. For custom designs, contact customer service.

Circuit Board Jack

Straight, 4-leg


75Ω..... UCBJ20F

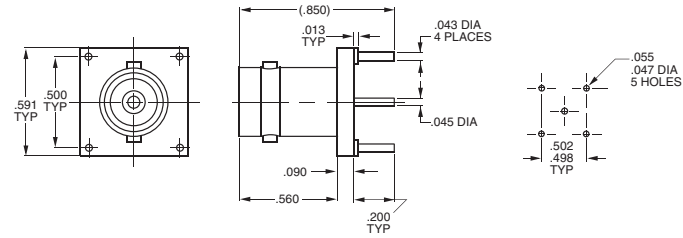

Circuit Board Jack

Straight, 3-leg


75Ω..... UCBJ223

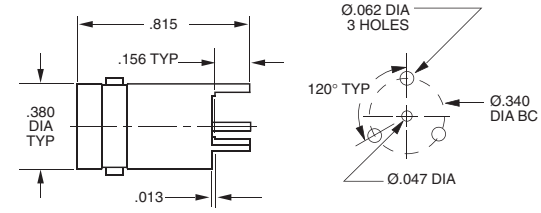

Circuit Board Jack

Straight, 3-leg


50Ω..... CBJ20

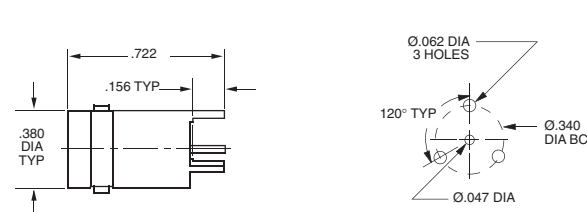

Right Angle Coax BNC

Circuit Board Jack


50Ω..... CBJR220

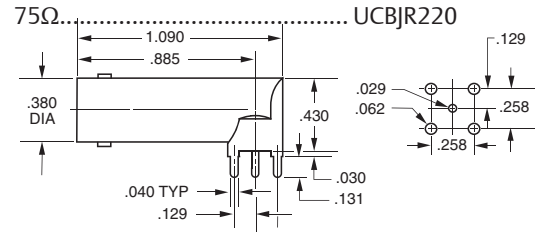

Circuit Board Jack

Straight, 4-leg

50Ω..... CBJ22

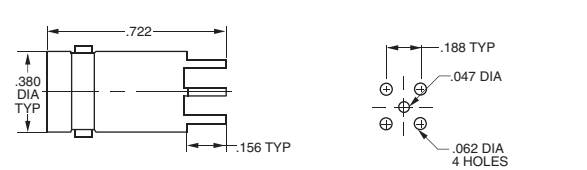

Circuit Board Jack


Right Angle, Tall Version

50Ω..... CBJR20A

75Ω..... UCBJR20A

| MODEL NO. | LTR CODE | OHM | A DIM | B DIM | C DIM | D DIM | E DIM |
|-----------|----------|-----|-------|-------|-------|-------|-------|
| CBJR20 | - | 50 | .046 | .24 | .090 | .050 | .0625 |
| UCBJR20 | - | 75 | .029 | .24 | .090 | .050 | .0625 |


| MODEL NO. | LTR CODE | OHM | A DIM | B DIM | C DIM | D DIM | E DIM |
|-----------|----------|-----|-------|-------|-------|-------|-------|
| CBJR20A | A | 50 | .046 | .34 | .090 | .058 | .070 |
| UCBJR20A | A | 75 | .029 | .34 | .090 | .058 | .070 |

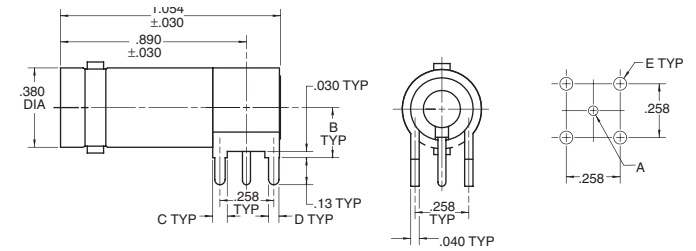

Circuit Board Jack

Straight, 4-leg


75Ω..... UCBJ224

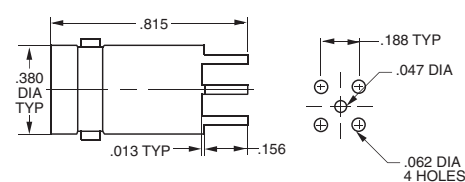

Non-insulated Circuit Board Bulkhead Jack

Straight, 4-leg

75Ω..... UCBBJ29

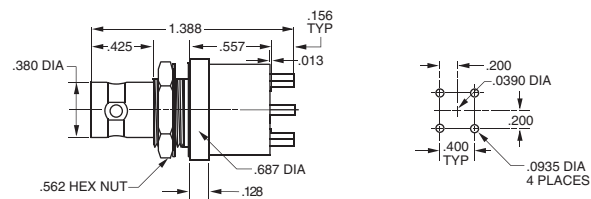


Mounting Hole: D3.109

Insulated Circuit Board Bulkhead Jack

Straight

50Ω..... CBBJ26

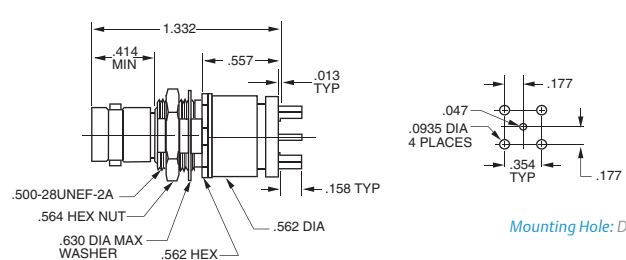

Mounting Hole: D3.156

Right Angle Circuit Board Bulkhead Jack

Non-insulated

50Ω..... CBBJR29

75Ω..... UCBBJR29

| MODEL # | LTR CODE | IMPD Ω | A DIA | B DIM | C DIM | D DIM | E DIA |
|-----------|----------|--------|-------|-------|-------|-------|-------|
| CBBJR29 | ---- | 50 | .046 | .24 | .090 | .050 | .0625 |
| UCBBJR29 | ---- | 75 | .029 | .24 | .090 | .050 | .0625 |
| CBBJR29A | A | 50 | .046 | .24 | .090 | .058 | .070 |
| UCBBJR29A | A | 75 | .029 | .24 | .090 | .058 | .070 |

RoHS Compliant

Non-insulated


50Ω..... 6-0001-1

75Ω..... 6-0001-4

| MODEL # | LTR CODE | IMPD Ω | A DIA | B DIM | C DIM | D DIM | E DIA |
|----------|----------|--------|-------|-------|-------|-------|-------|
| 6-0001-1 | ---- | 50 | .046 | .24 | .090 | .050 | .0625 |
| 6-0001-2 | ---- | 75 | .029 | .24 | .090 | .050 | .0625 |
| 6-0001-3 | A | 50 | .046 | .24 | .090 | .058 | .070 |
| 6-0001-4 | A | 75 | .029 | .24 | .090 | .058 | .070 |

Mounting Holes: D3.156 (Insulated)

Maximum Panel Thickness: .179 D-Hole: D3

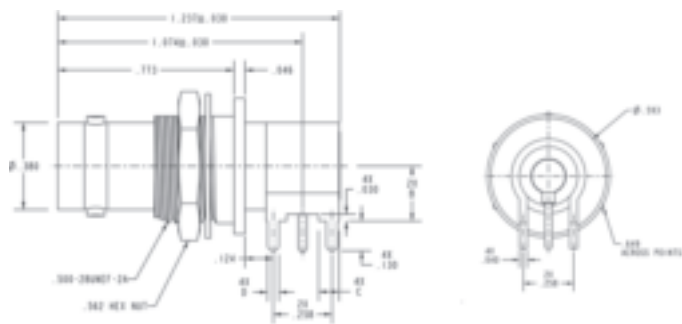

Right Angle Circuit Board Bulkhead Jack

Insulated

50Ω..... CBBJR26

75Ω..... UCBBJR26

| MODEL # | LTR CODE | IMPD Ω | A DIA | B DIM | C DIM | D DIM | E DIA |
|-----------|----------|--------|-------|-------|-------|-------|-------|
| CBBJR26 | ---- | 50 | .046 | .24 | .090 | .050 | .0625 |
| UCBBJR26 | ---- | 75 | .029 | .24 | .090 | .050 | .0625 |
| CBBJR26A | A | 50 | .046 | .34 | .090 | .058 | .070 |
| UCBBJR26A | A | 75 | .029 | .34 | .090 | .058 | .070 |


RoHS Compliant

Insulated

50Ω..... CBBJR26-RC

75Ω..... UCBBJR26-RC

| MODEL # | LTR CODE | IMPD Ω | A DIA | B DIM | C DIM | D DIM | E DIA |
|--------------|----------|--------|-------|-------|-------|-------|-------|
| CBBJR26-RC | ---- | 50 | .046 | .24 | .090 | .050 | .0625 |
| UCBBJR26-RC | ---- | 75 | .029 | .24 | .090 | .050 | .0625 |
| CBBJR26A-RC | A | 50 | .046 | .34 | .090 | .058 | .070 |
| UCBBJR26A-RC | A | 75 | .029 | .34 | .090 | .058 | .070 |

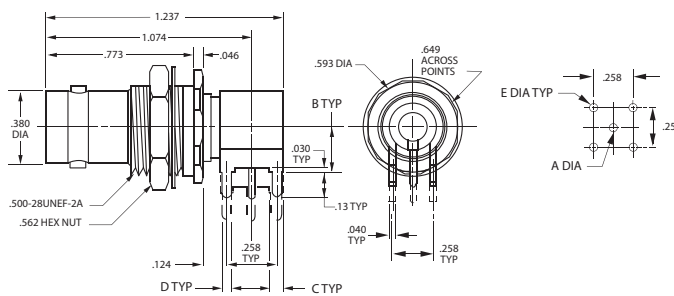

Mounting Holes: D3.156 (Insulated)


Coax Connectors / Mini-WECox Coax Circuit Board Jacks

Circuit Board Mounting Mini-WECox Patch Jack

75Ω Right Angle..... CBJR12

B=.24

| MODEL NO. | LTR CODE | B DIM |
|-----------|----------|-------|
| CBJR12 | ---- | .24 |
| CBJR12A | A | .34 |

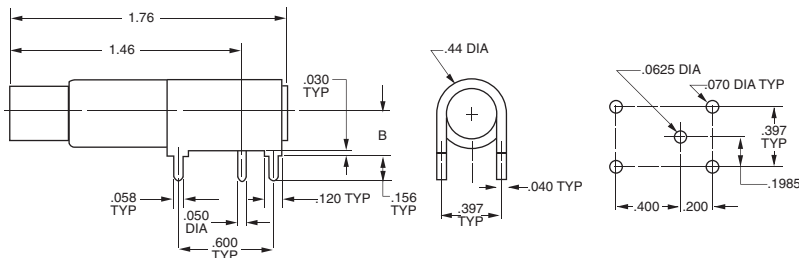


Coax Connectors / Miniature Coax 250 Series


Mini-BNC Plugs & Jacks

The mini-BNC 250 RF connector series from Trompeter was designed specifically for DS3 telco coaxial central office applications to allow higher interconnect density while preserving the positive characteristics of the Trompeter full size BNC. In fact, the 250 series provides for higher density of interconnects in a given area.

Miniature BNC (M-BNC) Coaxial Plug


Straight


75Ω..... UPL250- 

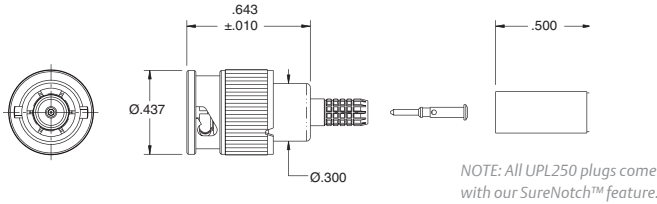

Miniature BNC (M-BNC) Coaxial Bulkhead Jack

Straight

75Ω..... UBJ250- 

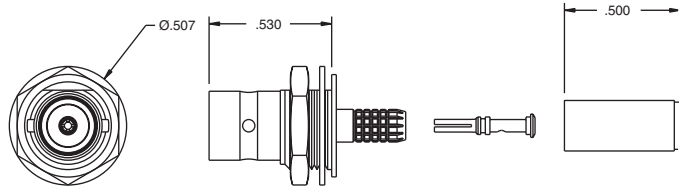


Miniature BNC (M-BNC) Coaxial Circuit Board Jack

Straight

75Ω..... UCBJ250-N

75Ω..... UCBJ250-G

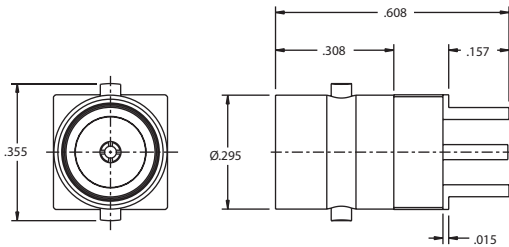





Miniature BNC (M-BNC) Circuit Board Jack


Right Angle

75Ω..... UCBJR250-N

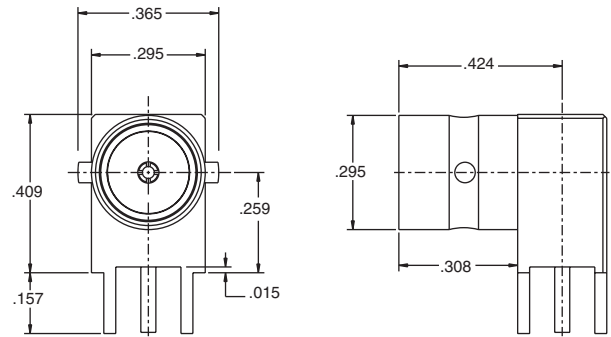75Ω..... UCBJR250-G



| Part Number | Description | Plating | Bulkhead Mount | PCB OA Thickness |
|--|--|---------|----------------|------------------|
| UPL250-  | Straight plug M-BNC series | ni | n/a | |
| UPLR250-  | Right angle plug M-BNC series | ni | n/a | |
| UBJ250-  | Bulkhead cable jack | ni | yes | |
| UCBJ250-G | Straight PCB-mounted jack | au | no | |
| UCBJ250-N | Straight PCB-mounted jack | ni | no | |
| UCBBJ250-G | Straight PCB-mounted jack | au | yes | |
| UCBBJ250-N | Straight PCB-mounted jack | ni | yes | |
| UCBJR250-G | Right angle PCB-mounted jack | au | no | |
| UCBJR250-N | Right angle PCB-mounted jack | ni | no | |
| UCBBJR250-G | Right angle PCB-mounted jack | au | yes | |
| UCBBJR250-N | Right angle PCB-mounted jack | ni | yes | |
| UCBJE250-1 | PCB-edge mounted SMT jack | au | no | 0.032 |
| UCBJE250-2 | PCB-edge mounted SMT jack | au | no | 0.064 |
| UCBBJE250-1 | PCB-edge mounted SMT jack | au | yes | 0.032 |
| UCBBJE250-2 | PCB-edge mounted SMT jack | au | yes | 0.064 |
| UAD258 | M-BNC jack to M-BNC jack adapter, Barrel adapter | ni | yes | |
| UTNAF250 | Terminators | ni | no | |
| UTNAM250 | Terminators | ni | no | |
| UADF20M250 | BNC to MBNC adapters M to F | ni | no | |
| UADF20F250 | BNC to MBNC adapters M to F | ni | no | |
| UADF250M20 | BNC to MBNC adapters M to F | ni | no | |

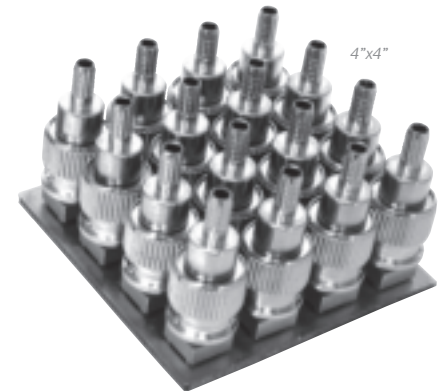


 Refer to Cable Group Tables, pages 74-91.

"D" mounting holes are on page 54.

Cable Plug

Wrench Crimp


- 50Ω..... PL40-
- 75Ω..... UPL40-

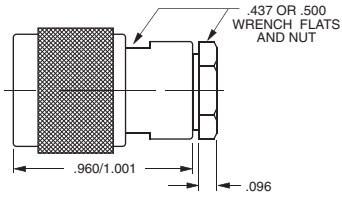

Cable Jack

Wrench Crimp


- 50Ω..... CJ40-
- 75Ω..... UCJ40-

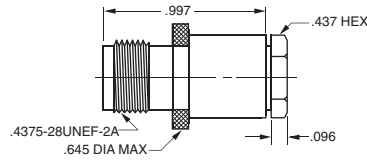

Cable Plug

Tool Crimp


- 50Ω..... PL240-
- 75Ω..... UPL240-



Cable Jack

Tool Crimp


- 50Ω..... CJ240-
- 75Ω..... UCJ240-

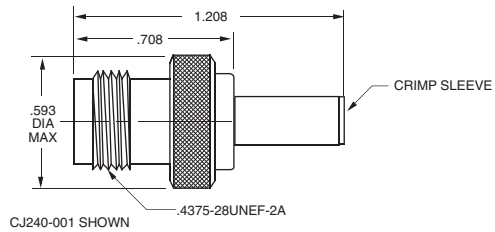

Insulated Bulkhead Jack

Feed-Through

- 50Ω..... BJ48
- 75Ω..... UBJ48

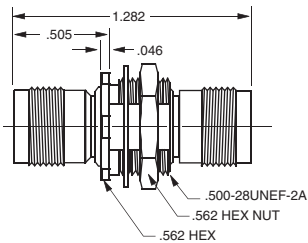


Mounting Hole: D3.156
GF-Ground filter version page 41

TNC Coupling Adapter

Barrel Connector

- 50Ω..... AD48
- 75Ω..... UAD48

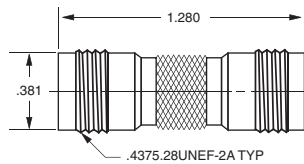

Refer to Cable Group Tables, pages 74-91.
"D" mounting holes are on page 54.


Coax Connectors / Miniature Coax Threaded 40/240 Series

TNC Bulkhead Jacks

Insulated Bulkhead Jack

Rear Mount, Solder Pot

- 50Ω..... BJ41
- 75Ω..... UBJ41

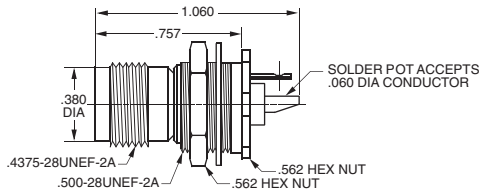


Mounting Hole: D3.147

Bulkhead Jack

Solder Pot

- 50Ω..... BJ40
- 75Ω..... UBJ40

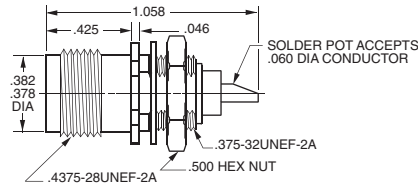


Mounting Hole: D5.125

Insulated Bulkhead Jack

Rear Mount, Wrench Crimp

- 50Ω..... BJ46-△
- 75Ω..... UBJ46-△




Mounting Hole: D2.187
GF-Ground filter version page 40.

Insulated Bulkhead Jack

Front Mount, Solder Pot

- 50Ω..... BJ47
- 75Ω..... UBJ47

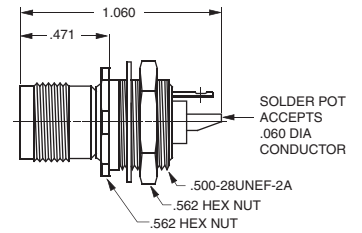

Mounting Hole: D3.147


Insulated Circuit Board Jack

Right Angle

- 50Ω..... CBBJR46
- 75Ω..... UCBBJR46
- 50Ω..... CBBJR46A
- 75Ω..... UCBBJR46A

"A" refers to tall versions

| MODEL NO. | LTR CODE | OHM | A DIM | B DIM | C DIM | D DIM | E DIM |
|-----------|----------|-----|-------|-------|-------|-------|-------|
| CBBJR46 | - | 50 | .046 | .24 | .090 | .050 | .0625 |
| UCBBJR46 | - | 75 | .029 | .24 | .090 | .050 | .0625 |
| CBBJR46A | A | 50 | .046 | .34 | .090 | .058 | .070 |
| UCBBJR46A | A | 75 | .029 | .34 | .090 | .058 | .070 |

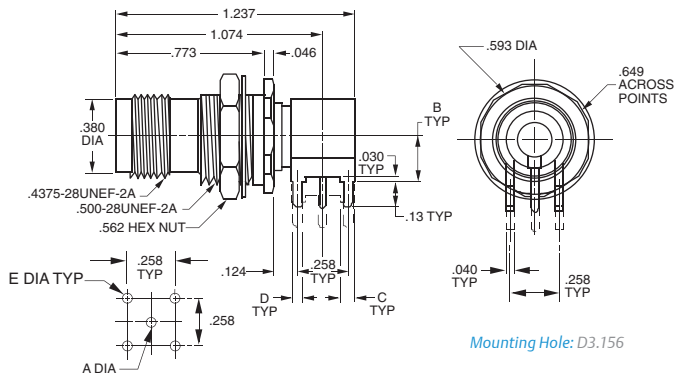


Mounting Hole: D3.156

Bulkhead Cable Jack

Wrench Crimp

- 50Ω..... BJ49-△
- 75Ω..... UBJ49-△




Mounting Hole: D3.218 / D2.218
(Cable Groups 6, 6E, 51, 52)

Bulkhead Cable Jack

Tool Crimp

- 50Ω..... BJ249-△




Mounting Hole: D3.218
D2.218 (Cable Groups 6, 6E, 51, 52)

Circuit Board Jack Bulkhead Mount

Right Angle

- 50Ω..... CBBJR49
- 75Ω..... UCBBJR49

| MODEL NO. | LTR CODE | OHM | A DIM | B DIM | C DIM | D DIM | E DIM |
|-----------|----------|-----|-------|-------|-------|-------|-------|
| CBBJR49 | - | 50 | .046 | .24 | .090 | .050 | .0625 |
| UCBBJR49 | - | 75 | .029 | .24 | .090 | .050 | .0625 |
| CBBJR49A | A | 50 | .046 | .34 | .090 | .058 | .070 |
| UCBBJR49A | A | 75 | .029 | .34 | .090 | .058 | .070 |

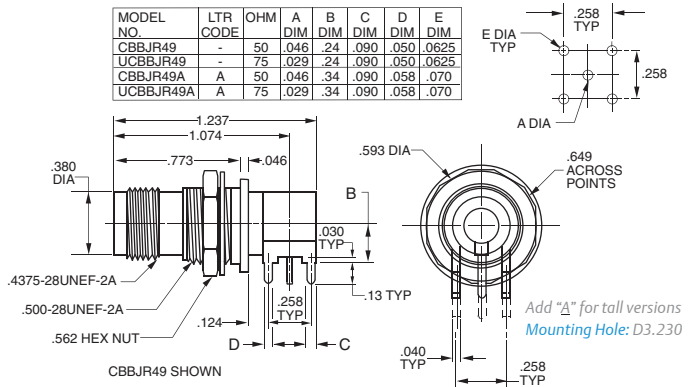

Add "A" for tall versions
Mounting Hole: D3.230

These BNC/TNC push-on jacks and plugs are designed for (U)PL123 blind mate rack and panel applications. The male plugs mate (U)PL122 with any BNC/TNC jack and are ideally suited for test/cable applications.


Panel Plug

Front Mount, Solder Pot

- 50Ω..... PL121
- 75Ω..... UPL121

W/Solder Lug

- 50Ω..... PL121SL
- 75Ω..... UPL121SL

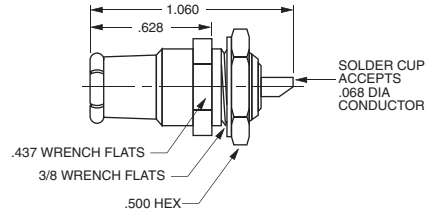

Mounting Hole: C2.093


Bulkhead Jack

Front Mount, Solder Lug

- 50Ω..... BJ120
- 75Ω..... UBJ120

W/Solder Lug

- 50Ω..... BJ120SL
- 75Ω..... UBJ120SL

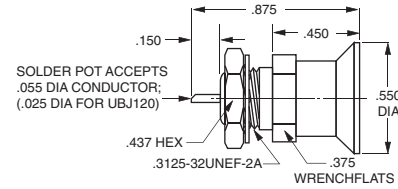


Mounting Hole: C1.120

Panel Plug

Rear Mount, Cable Entry

- 50Ω..... PL122-⚠
- 75Ω..... UPL122-⚠

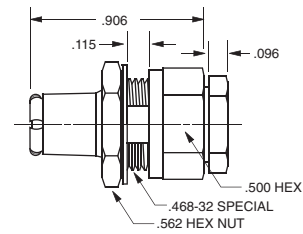


Mounting Hole: DD5.187

Cable Plug

Wrench Crimp


- 50Ω..... PL123-⚠
- 75Ω..... UPL123-⚠

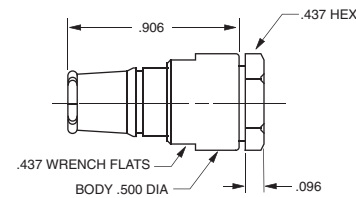

Cable Plug

Tool Crimp

- 50Ω..... PL223-⚠
- 75Ω..... UPL223-⚠



⚠ "D" mounting holes are on page 54.


Coax Connectors / 1023 Series

1.0/2.3 DIN Connectors – 75 Ω


Trompeter's DIN connector series, is manufactured to the DIN 47297 (75 Ω) interface specification. This range of Trompeter's DIN 1.0/2.3 connector are 45% smaller than the DIN 1.6/5.6 and is ideal for higher density patching requirements. With this space savings, significantly more ports can be placed in the same 1RU panels. The Trompeter 1.0/2.3 series includes cable plugs, cable jack and Type N to DIN adapters.

Trompeter's 1.0/2.3 series works with all of the most popular cables used in the video distribution and telecom central office environments and can rapidly be adapted to suit any coaxial cable developments.

This line of 1.0/2.3 connectors delivers the same superior quality performance of the industry leading Trompeter 220 Series BNC range. Employing the same tooling and termination as the 220 series BNCs ensures a minimal deployment cost and disruption for our customers.

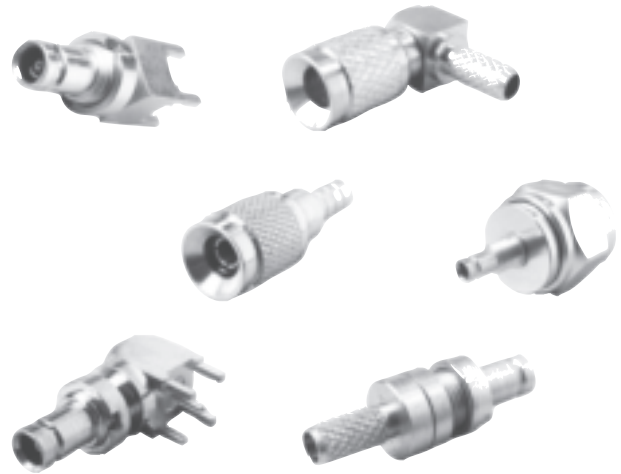


Straight PC Bulkhead Mount Jack UCBBJ1023

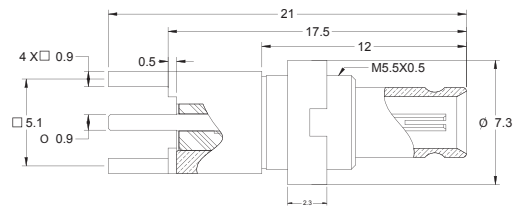


Dimensions are in mm

Right Angle Crimp Plug UPLR1023-⚠

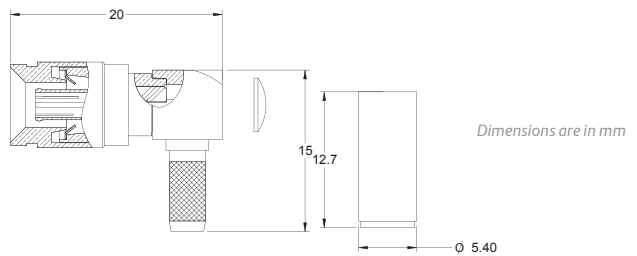


Straight Crimp Plug UPL1023-⚠

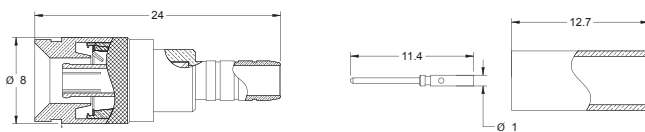


Dimensions are in mm

Adapter 75 Ohm Type N Plug to DIN 1.0/2.3 Jack UAADF1023M95

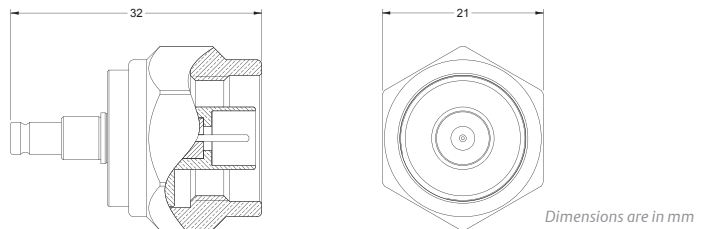


DIN 1.0/2.3 Right Angle PCB Bulkhead Mount Jack UCBBJR1023

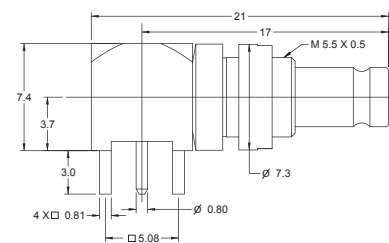

Dimensions are in mm

DIN 1.0/2.3 Bulkhead Jack UBJ1023-⚠

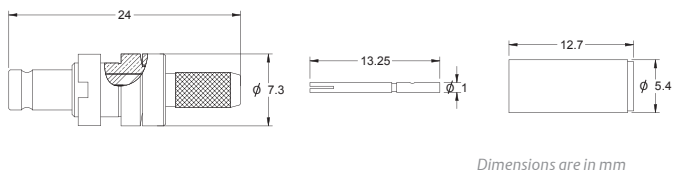

⚠ Refer to Cable Group Tables, pages 74-91.

Trompeter's 110 series connectors are 30% smaller than the standard BNC currently used for the Coax Central Office termination. With this space savings, 72 interconnects can be placed in the same 1 rack unit panels as 52 BNCs. The 110 series of connectors is available in the following: cable plug, cable jack,


a U-Link for connecting two jacks, a right angle circuit board jack, and BNC to DIN adapters.

Trompeter's 110 series works with all the cables currently in use in the central office environment and like all Trompeter connectors, can be made to accommodate any coax cable changes.

RF Coaxial 75 Ohm DIN

Threaded Full Crimp Cable Plug

UPL110-

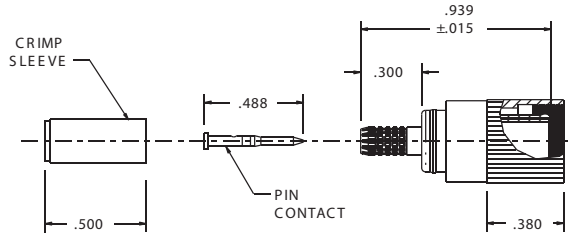


RF Coaxial 75 ohm DIN

Jack Threaded Connector

MEETS REQ OF IEC 169-13


UBJ110-

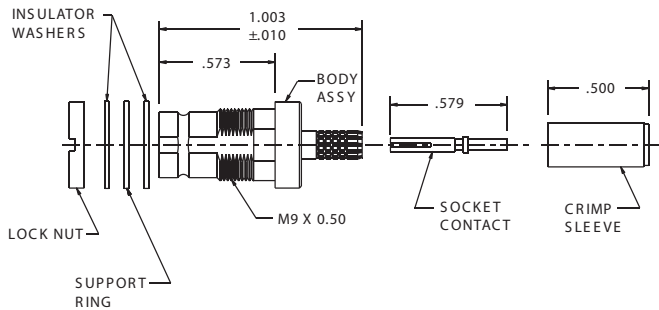

Dual Coaxial DIN Connector "U-Link" 75 Ohm With Two Plugs


Based on 169-13 Specification

105-1496

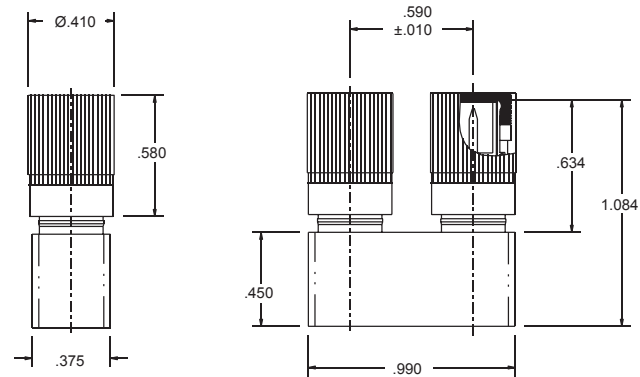


Adapter 75 ohm BNC Jack to 75 ohm DIN Plug

UADF20M110

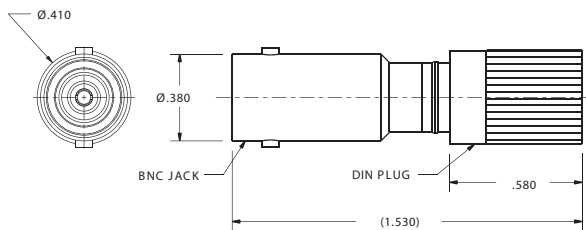

Adapter 75 ohm BNC Plug to 75 ohm DIN Jack

UADM20F110

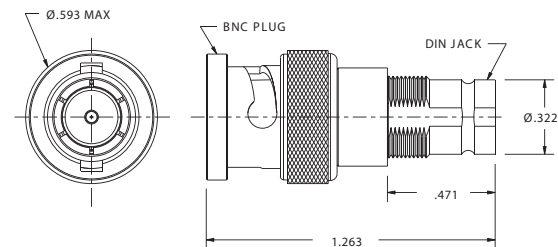

Refer to Cable Group Tables, pages 74-91.

Coax Connectors / Coax Type N Connectors


90 Series

Trompeter's 90 Series incorporates many of the features of our BNC lines including 3-piece wrench crimp configuration, gold plated captive center contacts, beryllium copper female contacts, and PTFE dielectrics. The 90 Series will also accommodate non-flammable plenum coax cables.

Cable Plug

Wrench Crimp

- 50Ω..... PL95-
- 75Ω..... UPL95-

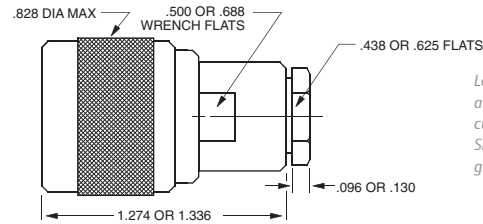


Large body versions are available, contact customer service. Size depends on cable group.

Bulkhead Cable Jack

Wrench Crimp

- 50Ω..... BJ95-
- 75Ω..... UBJ95-

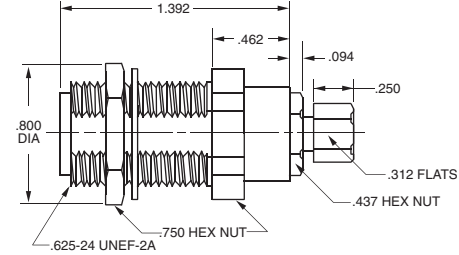


Mounting Holes: DD4.310 (Standard body)
DD1.310 (Cable Groups -6A/6B/6E, -48, -50)

Adapter

BNC Female to N Female

- 50Ω..... AD95
- 75Ω..... UAD95

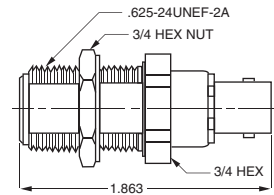


Mounting Hole: DD4.310

Bulkhead Jack

Solder Pot

- 50Ω..... J95
- 75Ω..... UJ95

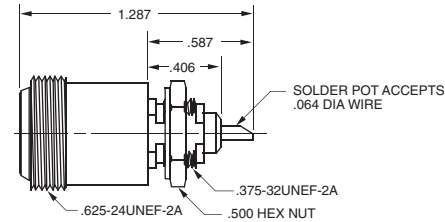


Mounting Hole: D5.310

Insulated Adapter

BNC Female to N Male


- 50Ω..... ADI95
- 75Ω..... UADI95

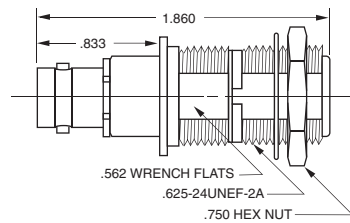

Mounting Hole: DD4.203

Feed-thru Jack


- 50Ω..... BJ98-2
- 75Ω..... UBJ98-2

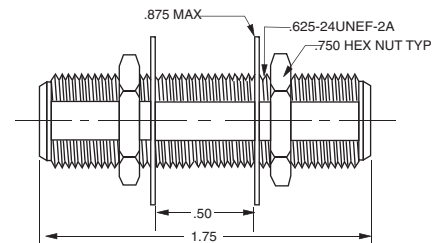

BJ98-2 Shown

Mounting Hole: DD4.50
Options available for panels up to 2.25" thick. Call customer service.



Type F Adapter AD131

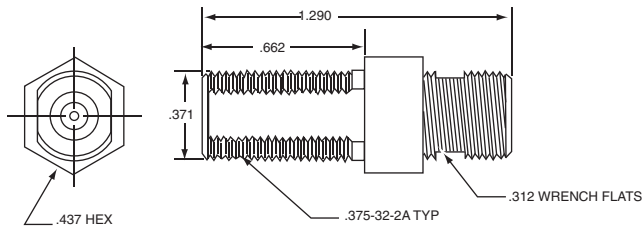


Between Series Coaxial Female

BNC to Male F Type Adapter

75Ω..... AD1300

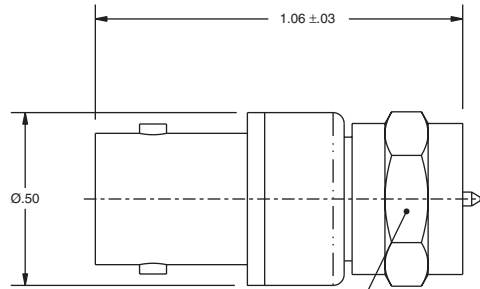

AD1300
BNC to F Type Adapter

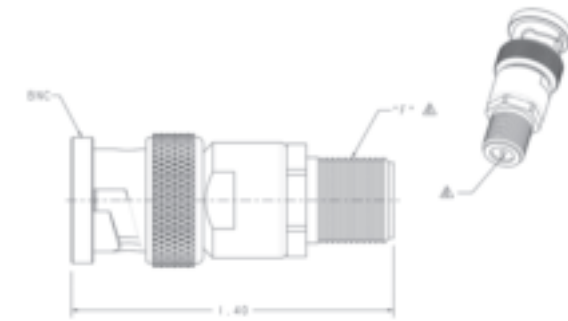


AD133
BNC MALE TO F TYPE FEMALE ADAPTER

Circuit Board Edge Mount

F Type Style Female Jack

CBJE130-1, -2, or -3

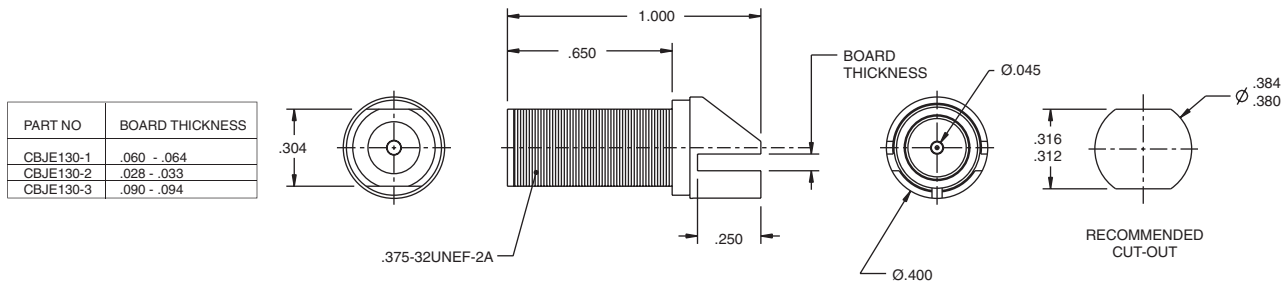

Note: This circuit board jack meets SCTE IPS-SP-401 and has a Return Loss of $\lt; 221\text{B}$ at 2 GHz.

"D" mounting holes are on page 54.


Coax Connectors / Coax F Type Connectors

130 Series

Trompeter's 130 Series Coax F Type Connectors meet SCTE-IPS-SP-4-1 and have a Return Loss of <-22 dB at 2 GHz.

75 Ohm Male Type F Type Coaxial Cable Plug


PL130C-(see dash number from chart on right)

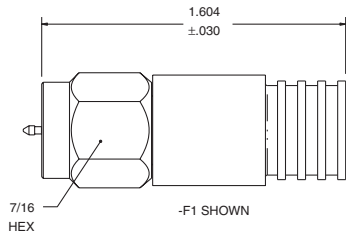

| PART NO | A DIM | CABLES ACCOMMODATED |
|-----------|-------|--|
| PL130C-F1 | .360 | COMMSCOPE 6 SERIES QUAD (P/N 6746) (P/N F655VV) |
| PL130C-F2 | .324 | BELDEN 6 SERIES (P/N 8212E) (P/N 9114) |
| PL130C-F3 | .360 | COMMSCOPE 59 SERIES (P/N 5 59 HEC) |


75 Ohm F Type Tool Crimp Plug

PL130SC-(see dash number from chart on right)

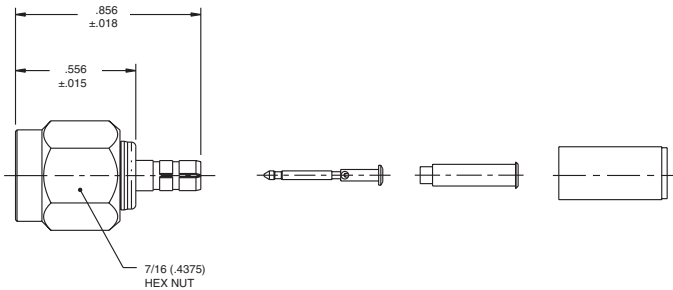


75 Ohm Right Angle F Type Style Full Crimp Cable Plug

PLR130SC-(see dash number from chart on right)

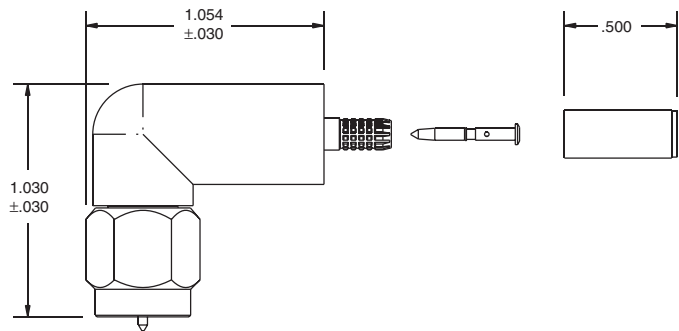

| DASH NO | CABLES ACCOMMODATED | A HEX |
|---------|---|-------|
| -001 | RG-178, -196 | .178 |
| -002 | HEWLETT PACKARD 8120 - 1107 | .197 |
| -003 | RG-174, 316 | .178 |
| -004 | RG-179, 187 | .178 |
| -005 | NORTHERN ELECTRIC DBL - SHLD RG-187 | .197 |
| -006 | GC875GPI, GRUMMAN DBL - SHLD RG-188 | .197 |
| -007 | 275-3991, MICRODOT | .178 |
| -008 | RG-195, -180 421-111, ESSEX | .178 |
| -009 | 8218, BELDEN YR23023 BELDEN 21-597, ESSEX | .178 |
| -011 | RG-58, RG-141, RG-303, TCC-50-2 | .213 |
| -013 | RG-59 | .255 |
| -013A | TCC-75-2 | .255 |
| -013B | RG-62 | .255 |
| -014 | 8212, BELDEN | .255 |
| -015 | 730A, LUCENT | .290 |
| -015A | RG-71 | .290 |
| -016 | 724, LUCENT 8281, BELDEN | .324 |
| -017 | RG-6 | .344 |
| -018 | 9268, BELDEN | .255 |
| -019 | 8279, BELDEN | .255 |
| -020 | 9248, BELDEN | .290 |
| -021 | 88240, BELDEN | .213 |
| -022 | 88241, 88269, BELDEN | .255 |
| -023 | 89108, BELDEN | .255 |
| -024 | 89120, BELDEN | .290 |
| -025 | 734A, LUCENT | .255 |
| -026 | 735A, LUCENT | .178 |
| -027 | KS19224L2, LUCENT | .178 |

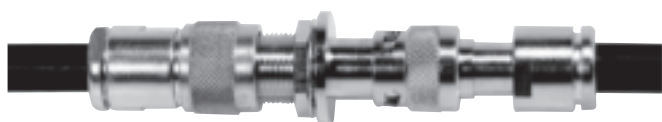


Type N Plug Patch Jack Patch Plug

Trompeter's 50Ω low VSWR (1.11:1) patching system has been developed for use at frequencies up to 3 GHz and at power levels up to 500 watts. J94 jack accepts a Type N male plug in back and the PL93 or PL94 in the front of the panels shown, or a custom panel of your own design. Patch plugs incorporate a push-fit design that snap into position in the jack and are available with, or without a bayonet locking feature. Normal jack spacing is 3" center-to-center. For a minimum bend radius when patching adjacent jacks, use Trompeter standard patch cords made with RG8 cable with a minimum length of 14". Otherwise the minimum length is 18". Panels loaded at no additional cost.


Patch Plug

50Ω, without Locking Sleeve
PL93-

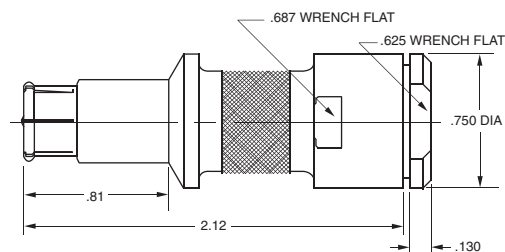


Patch Plug

50Ω, with Locking Sleeve
PL94-

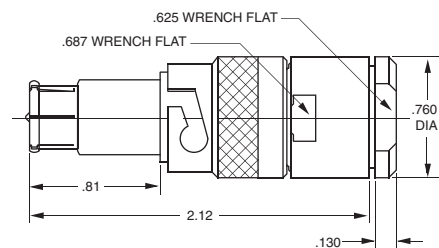


Patch Cords

50Ω, Patch Plug without Locking Sleeve
PCH-L-50




Patch Cords

50Ω, Patch Plug with Locking Sleeve
PCHY-L-50




Patch Jack to Type N Jack

50Ω Threaded .62524UNEF-2A
J94

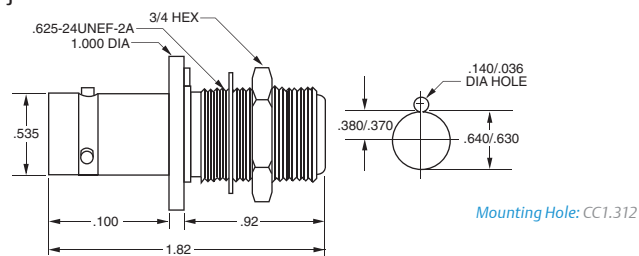


Panels for J94

| # of Holes | Notching | Panel Type | Height | Part# | |
|------------|----------|---------------|--------|-------|---------|
| 12 | Open | Common Ground | A = | 1.75" | JSH-12 |
| 12 | Closed | Insulated | A = | 1.75" | JSHI-12 |
| 24 | Open | Common Ground | B = | 5.25" | JSH-24 |
| 24 | Closed | Insulated | B = | 5.25" | JSHI-24 |

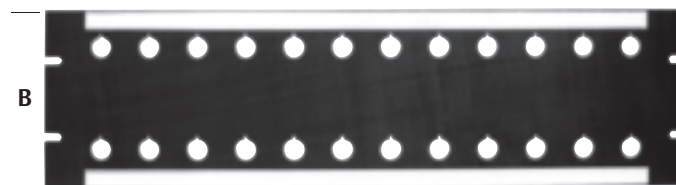

Looping Plug

50Ω - Green Handle
LPH-50

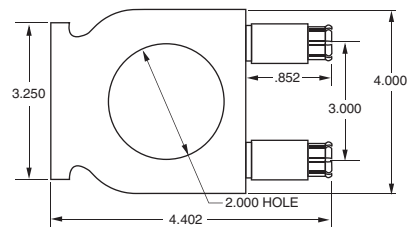

"L" replace with length in inches. "D" mounting holes, page 54. For standard panels see page 53.


Coax Connectors / 50Ω Subminiature Coax 50 Series

TPS/TCM Jacks & Plugs

Cable Plug

Wrench Crimp

50Ω 3-Lug..... PL50-

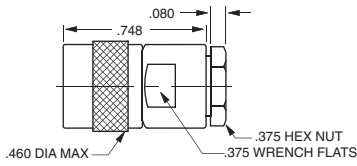


PL50-1 Shown

Bulkhead Jack

Front Mount, Solder Pot

50Ω 3-Lug..... BJ50

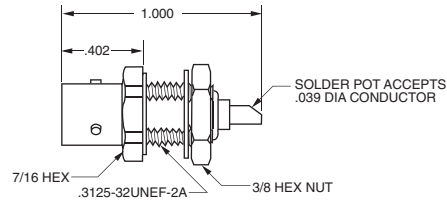


Mounting Hole: D6.218

Cable Plug

Wrench Crimp

50Ω 3-Lug..... PL50C-

75Ω 3-Lug..... PL50C-

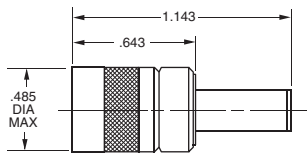


PL50C-001 Shown

Bulkhead Jack

Front Mount, Solder Pot

50Ω 3-Lug..... BJ57

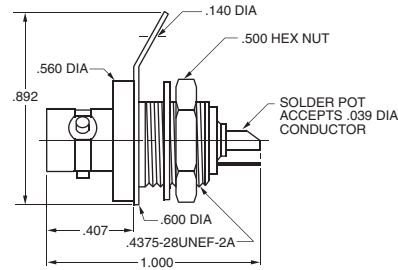

BJ57 Shown
Mounting Hole: D4.187


Cable Plug

Wrench Crimp

50Ω 3-Lug..... CJ50-

50Ω 4-Lug..... CJ50FL-


50Ω Threaded..... CJ350-

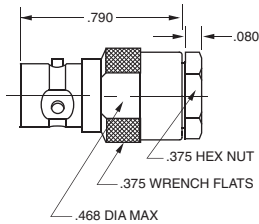

CJ50-1 Shown

Feed-thru Jack

50Ω 3-Lug..... BJ58




BJ58 Shown
Mounting Hole: D5.190 /
D4.190 (Threaded)

Bulkhead Jack

Wrench Crimp

50Ω 3-Lug..... BJ59-

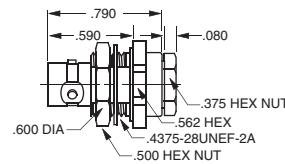

BJ59-1 Shown
Mounting Hole: D4.187

Trompeter's HDVDP and HDVDPM Patch Jacks are designed and engineered to exceed SMPTE 292M specifications for high definition video transmission and connectivity.

The normal-thru contact interface design of HDVDP/HDVDPM consists of a self-aligning normal-thru U-slot, two redundant points of contact, an independent applied normal force at each contact point, and a mechanical wipe region at each contact interface location. These design attributes provide reliable and repeatable patching/un-patching, resulting in low-level contact resistance stability.

HDVDPT
Full-size WECO Format
Terminated

HDVDP
Full-size WECO Format
Non-terminated

HDVDPMT
Mini WECO Format
Terminated

HDVDPM
Mini WECO Format
Non-terminated


HDVDP/HDVDPM Key Features

- Light weight design:
- HDVDPT (full size): 48.05 grams
- HDVDPMT (mini): 32.1 grams
- High-reliability normal-thru contact design
- Self-wiping normal thru contact design
- Streamlined design for repeatable manufacturability

Full Size Patch-Jack
75Ω Terminated & Non-Terminated



Mini Patch-Jack
75Ω Terminated & Non-Terminated

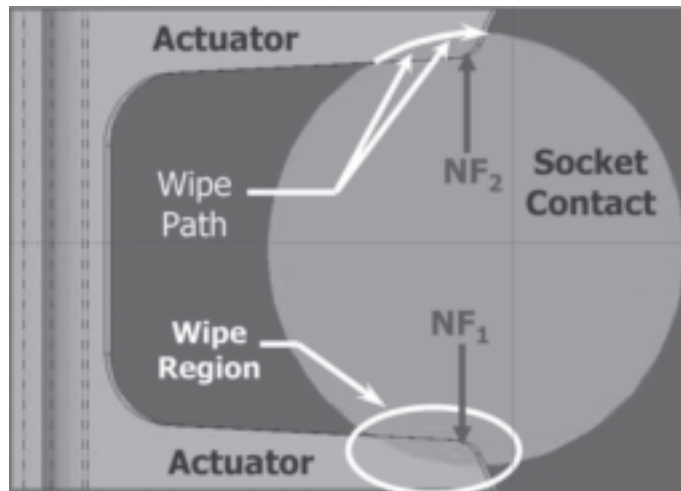


Top View of Normal-Thru Contact Interface (2x)

Patching Products / High Frequency

Video Patching


The HDVDPMN is superior quality, high bandwidth, dual video patch jack. This low profile, high performance component is designed for HDTV digital applications where space allocation is critical, such as in video truck application. It is ideal for situations where self-normalling is not practical, usually due to environmental considerations such as high ambient airborne particles or high vibration.

When used in conjunction with the LPMWHF looping plug, a "normal-thru" circuit is achieved, which will pass the full 1.485 Gbps of uncompressed data (2.25GHz of frequency) needed for HDTV, with return loss performance which exceeds SMPTE292M requirements. This high performance is maintained when patching from one location to another, using the PCMWB-L patch cord (call customer service).

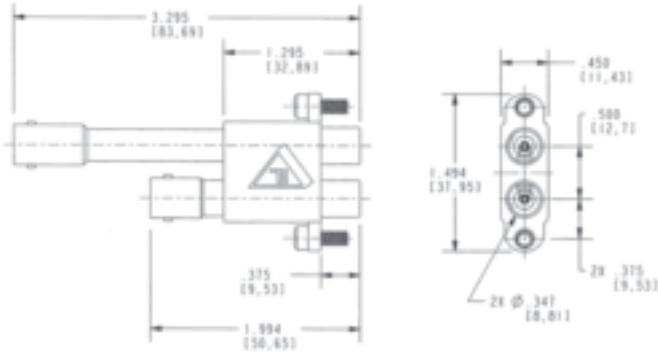


HDTV Ready High Frequency 75 Ohm Dual Coaxial Mini-WECO Patch Jack with BNC Receptacles

HDVDPMN

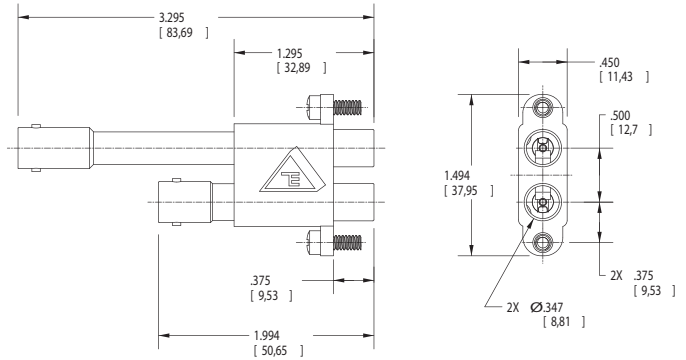

HDTV Ready High Frequency 75 Ohm Dual Coaxial WECO Patch Jack with BNC Receptacles

HDVDPN

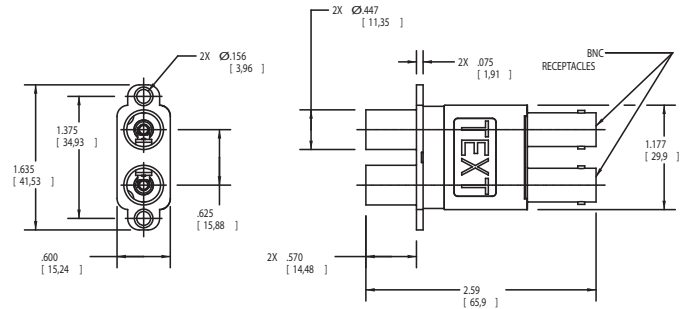

Note: uses the LPW-75 to normalize the circuit

Patch Jacks J15, J24, J314, and HDVDP can be mounted vertically or horizontally on 5/8" centers. Mounting tabs are normally "back-to-back" (as shown below).


Features

- J24 is a high frequency jack w/signals monitoring capabilities

High Frequency Normal-Thru with Monitor


Dual Coax Patch Jack
J24WMSTHF-75

To be used with grey aluminum insulated panel. JIS-72 (see page 57).

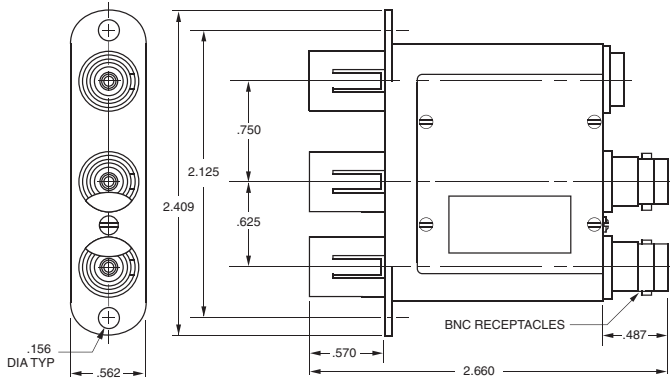


Adapter

Fixed Paralleling
50Ω BNC - Two Jacks, One Plug
PN2C

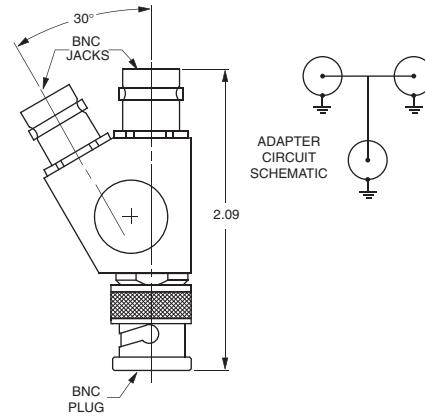



Adapter

Fixed Paralleling
50Ω BNC - One Jack, Two Plugs
PN2

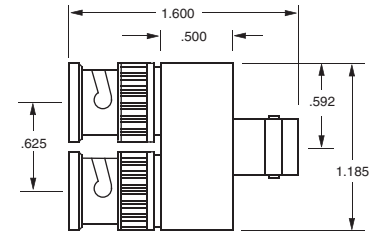

Adapter

Fixed Paralleling
50Ω BNC - Two Jacks, One Plug
PN2A

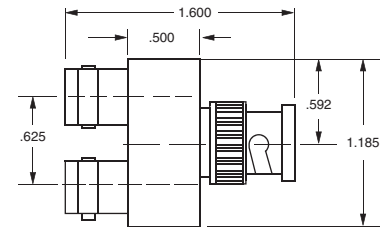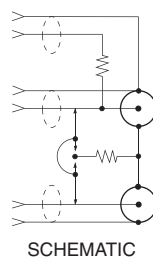


Patching Products / Coax Patch Jacks

Patch Jack

BNC Rear Interface


- 50Ω RCA Center Pin – .070"..... J3
- 75Ω WE Center Pin – .090"..... J3W

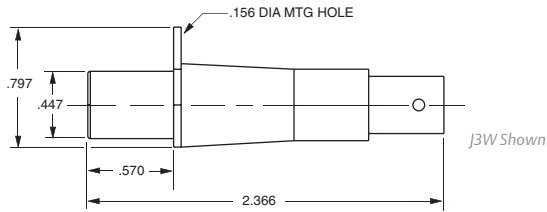

Patch Jack

Type N


- 50Ω RCA Center Pin – .070"..... J9
- 75Ω WE Center Pin – .090"..... UJ9W

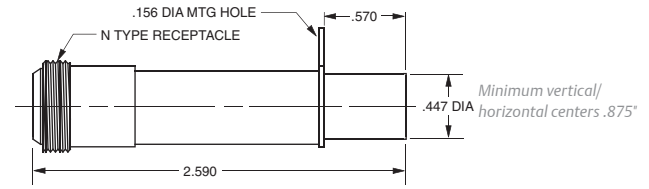

Patch Jack

Solder Pot


- 50Ω RCA Center Pin – .070"..... J3D
- 75Ω WE Center Pin – .090"..... J3WD

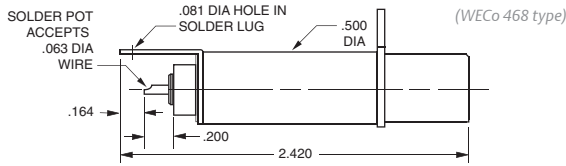

Patch Jack

TNC


- 50Ω RCA Center Pin – .070"..... J5
- 75Ω WE Center Pin – .090"..... J5W

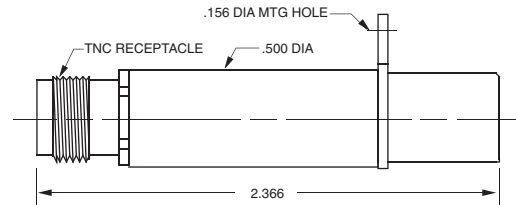

Patch Jack

Cable Entry


- 50Ω RCA Center Pin – .070"..... J3E-⚠
- 75Ω WE Center Pin – .090"..... J3WE-⚠

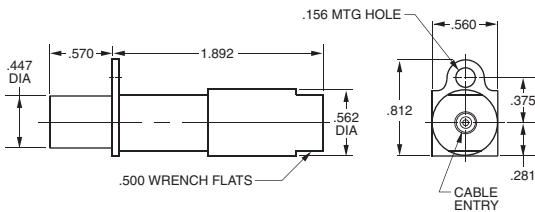

Patch Jack



Self-terminating


- BNC 50Ω RCA Center Pin – .070"..... J13-R
- 75Ω WE Center Pin – .090"..... J13W-R
- WECO 477B Type
- TNC 50Ω..... J13H-R
- TNC 75Ω..... J13WH-R

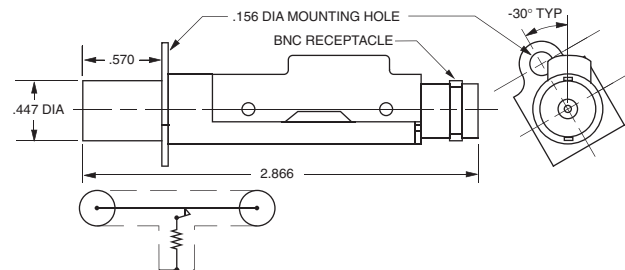

Patch Plug

Shield Crimp


50Ω RCA Center Pin – .070" A=2.73" B=1.50" PL1C-
 75Ω WE Center Pin – .090" A=2.45" B=1.22" PL1WC-

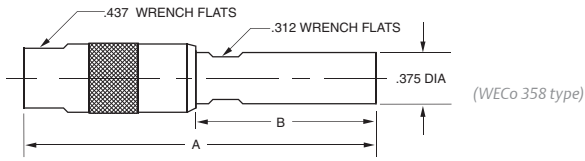

Patch Plug

Standard Crimp Plug with Locking Tab

PL11SCLT-

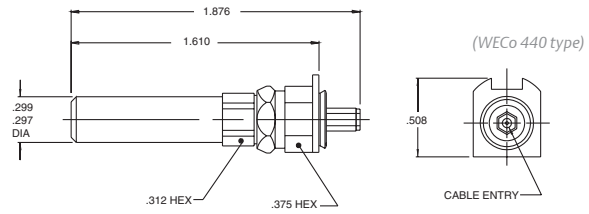


Termination Plug

No Chain

50Ω RCA Center Pin – .070" A=2.81" B=1.58" TP-1-R

No Chain


75Ω WE Center Pin – .090" A=2.45" B=1.25" TPW-1-R

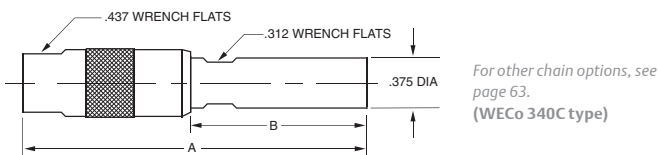

Patch Plug

Solder Contact, Crimp Shield

PL11C-

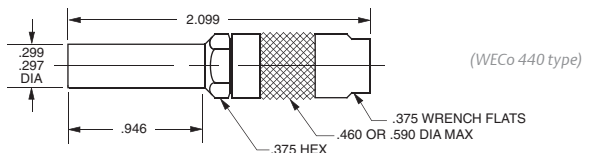

Adapters

Patch Plug to BNC/TNC


50Ω RCA Plug Center Pin .070" 50Ω BNC A= 2.774" AD1

50Ω RCA Plug Center Pin .070" 50Ω TNC A= 2.774" ADH1

75Ω WE Center Pin .090" 75Ω BNC A= 2.83" AD1W

75Ω WE Center Pin .090" 75Ω BNC A= 1.93" AD1WHD


75Ω WE Center Pin .090" 75Ω TNC A= 2.83" ADH1W

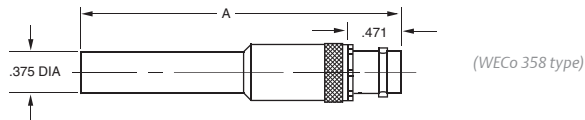

Adapter

75Ω Miniature Patch Plug to 75Ω BNC


ADMW12

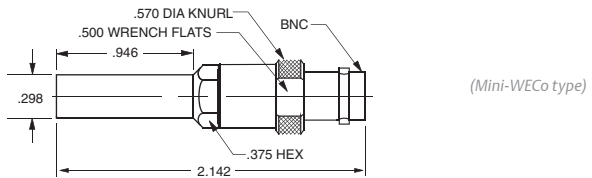

Patch Plug

Standard BNC Strip Dimension Crimp Contact, Crimp Shield

PL11SC-

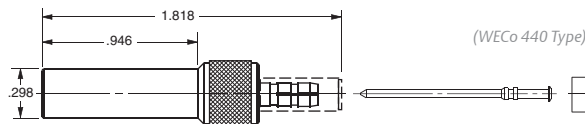

 Refer to Cable Group Tables, pages 74-91.

R = Resistance

Patching Products / 75Ω Mini-WECO Coax


Patch Jacks

Miniature Patch Jack

BNC Rear Interface

J11MW

Mini-WECO Type

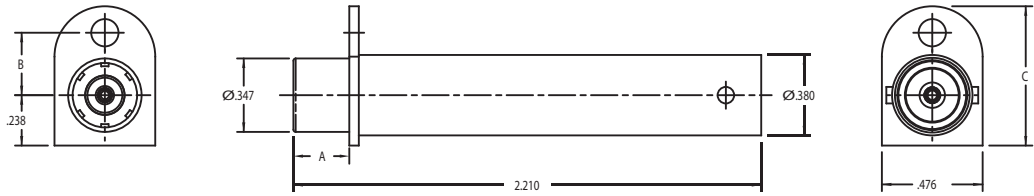


Miniature Patch Jack

BNC Rear Interface

J11MWL

Mini-WECO Type

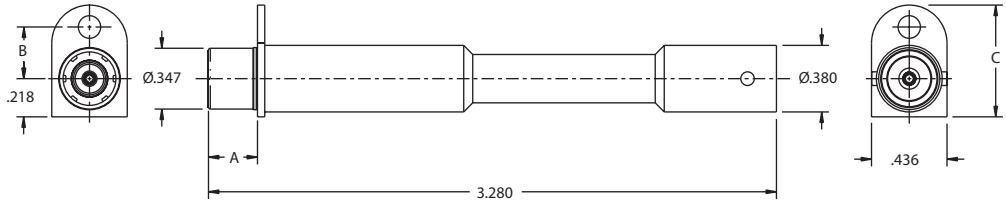


Patch Plug

Mini-WECO Crimp Plug with Locking Tab

PL1MWLT- Δ

PL1MWLT-(DASH NO)


| DASH NO | CABLE ACCOMMODATED | A HEX |
|---------|---------------------|-------|
| -009 | 8218, BELDEN | .178 |
| | 21-597, ESSEX | |
| | YR23023, BELDEN | |
| -013A | TCC-75-2, TROMPETER | .255 |
| | 8241F, BELDEN | |
| -014 | 8212, BELDEN | .255 |
| -025 | 734A TYPE | .255 |
| -026 | 735A TYPE | .178 |
| -027 | KS19224L2 LUCENT | .178 |

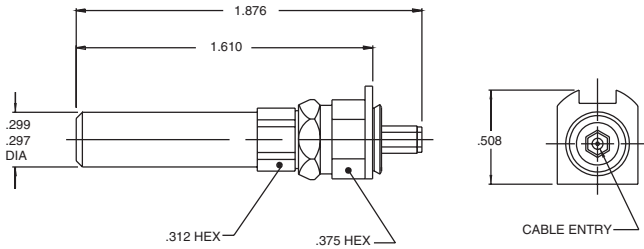

Miniature Patch Jack

Cable Entry, Field Serviceable Mini-WECO Type Centers


J12- Δ

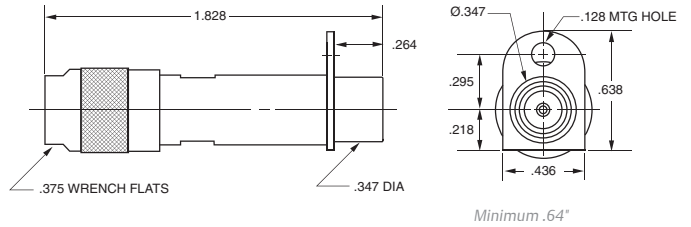

Miniature Patch Jack

Solder Pot, Mini-WECO Type

J11D

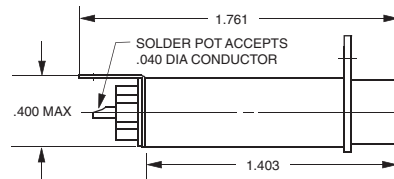


Patch Plug

Mini-WECO BNC Strip Dimension

Crimp Contact, Crimp Shield

PL1MW- Δ

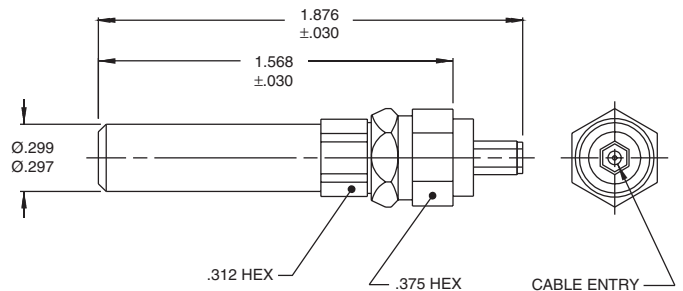



BNC Monitor




Pinch



Test Point

Standard Coax Looping Plugs

| Handle: B=1.51" C=.625" D=1.20" | Center Pin | 50Ω RCA |
|---------------------------------|------------|---------|
| Plain | .070" | LP-Z |
| Pinch | .070" | LPP-Z |
| Test Point Single | .070" | LPTP-Z |
| Test Point Dual | .070" | LP2TP-Z |
| BNC Monitor | .070" | LPA-Z |

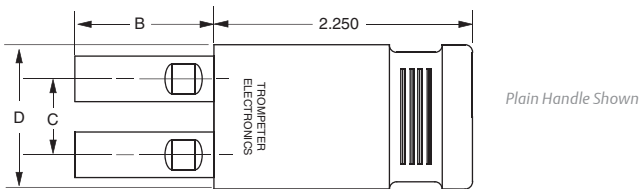

| Handle: B=1.51" C=1.00" D=1.57" | Center Pin | 50Ω RCA |
|---------------------------------|------------|---------|
| Plain | .070" | LPL-Z |
| Test Point Single | .070" | LPLTP-Z |
| BNC Monitor | .070" | LPLA-Z |

| Handle: B=1.25" C=.625" D=1.20" | Center Pin | 75Ω WE |
|---------------------------------|------------|----------|
| Plain | .090" | LPW-Z |
| Pinch | .090" | LPPW-Z |
| Test Point Single | .090" | LPWTP-Z |
| Test Point Dual | .090" | LPW2TP-Z |
| BNC Monitor | .090" | LPWA-Z |

| Handle: B=1.25" C=1.00" D=1.57" | Center Pin | 75Ω WE |
|---------------------------------|------------|----------|
| Plain | .090" | LPLW-Z |
| Test Point Single | .090" | LPLWTP-Z |
| BNC Monitor | .090" | LPLWA-Z |

Handles are color coded:
Green = 50Ω Violet = 75Ω

Z = denotes impedance of connecting cable in ohms. Audio Patch Cords also available, please call customer service.

Coax Connectors / 50Ω Miniature Coax Patching


Miniature Patch Jack

TPS Jack 50Ω

- 3-Lug..... J8
- 4-Lug..... J8FL

TCM Jack 50Ω


- Threaded (not shown)..... J308

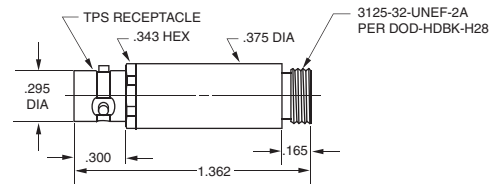

Patch Cord

Miniature Patch Plugs


- 50Ω..... PCM-L-50
- 75Ω..... PCM-L-75



Miniature Patch Jack

Solder Pot 50Ω


J8D

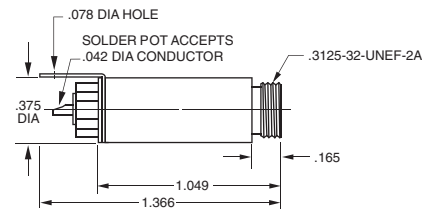

Patch Cord

50Ω Miniature Patch Plug to TPS Plug


PCM-X-L-50



Adapter

50Ω Miniature Patch Plug to 50Ω TPS Jack


ADM1

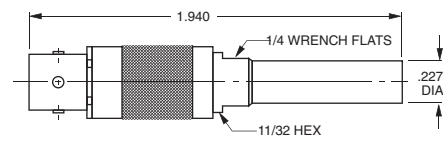

Miniature Looping Plug

Handle Color: Green = 50Ω..... LPM-50


Handle Color: Violet = 75Ω..... LPM-75

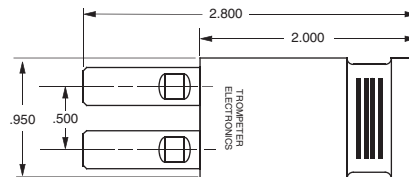


Adapter

50Ω Miniature Patch Plug to 50Ω BNC Jack

ADM2

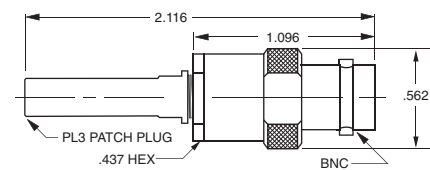

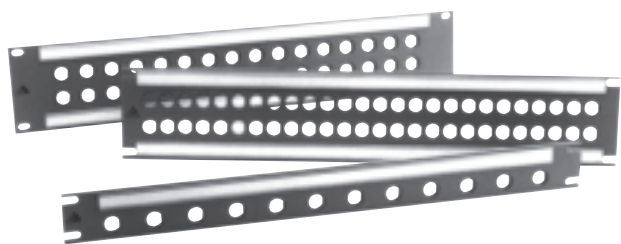


Trompetter Patch Products

Trompetter offers a wide selection of patching products for Military Databus, Telemetry, Telecom, Broadcast, CATV, and Testing. We offer these products for Twinax, Triax, and Coax cabling and in sizes to meet your space restrictions and environmental requirements.

Standard 19" Panels In popular sizes and configurations

Available in insulated black phenolic, and insulated or non-insulated aluminum. Aluminum panels are painted standard gray and come with either a phenolic back bar (insulated type), or an iridited aluminum back bar (non-insulated type). Aluminum panels can be painted to suit, or color matched (special order). Phenolic panels are available in black only.

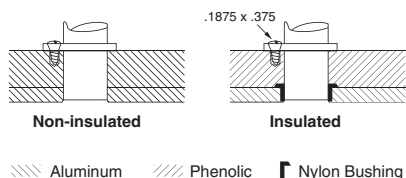

Panels available in heights of 1.75" (1 RU) or 3.5" (2 RU).

Custom Panels & Marking

Custom panels can be configured to meet your specifications, including special wiring, colors, engraving, or silk-screening (custom marking). Patch jack locations can also be marked on the rear of the panel for easy location of jacks. Please contact your local representative.

Hole Plugs For Jacks and Panels

| Hole Plugs For: | Hole Diameter | Part Number |
|-----------------------------------|---------------|-------------|
| Miniature Patch Panel (J8) | .250" | HP250 |
| Miniature Patch Jack (HDVDP, J11) | .304" | HP304 |
| Standard Patch Jack (HDVDP) | .375" | HP375 |
| Standard Patch Panel (JS, JSI) | .437" | HP437 |
| Standard Patch Panel | .500" | HP500 |



Front Loading Modular Panels are on page 12.

Ordering Loaded Panels

Panels can be ordered pre-loaded with any compatible jacks *without* additional labor charge by using the following part number format (provided the mechanical restrictions are recognized).

Example:

JSI-48A/HDVDP: Standard 48-hole, Insulated Panel (JSI-48A), loaded with twenty four (24) Standard 75Ω Patch Jacks (HDVDPT)

Panel Part Number

JS: Aluminum (Gray)..... JS
 JSI: Insulated (Gray)..... (I)
 JSIB: Insulated (Black)..... (IB)
 JSIX: Miniature Triax Insulated (Black)..... (IX)
 JSMW: Miniature Coax Insulated (Black)..... (MW)
Jack Part Number..... JACK

Panel Specifications

Notching

Metal panels (EIA-310-C): Open
 Phenolic (EIA-310-C): Closed

Materials

JS Series, Common Ground Panels

Panel: 6061-T6 Grade Aluminum
 Backbar: 6061-T6 Grade Aluminum

JSI Series, Insulated Panels

Panel: 6061-T6 Grade Aluminum
 Backbar: XXX Non-hydroscopic Phenolic
 Jack Insulation: Nylon Sleeves

JSIB Series, Insulated Panels

Panel: Black Arboron

JSMW Series, Insulated Panel

Panel: Black Arboron

Finishes

Standard Finish

FED-STD-595-26307, Light Gray

Customer Supplied

FED-STD-595# or Paint Chip

Chemical Film Finish

MIL-C-5541, Class 1a (Gold Tone)
 MIL-C-5541, Class 3 (Clear)

Identification

Designation Strip: Passivated Steel
 Standard Patch Panels: DS1 .580" x 16.6"
 Standard Patch Panels: DS2 .870" x 16.6"
 High Density Patch Panels: DS4 .240" x 16.6"
 Card: Opaque Vinyl
 Window: Clear Vinyl

Patching Products / Cable Distribution Panels

Distribution Panels



Ordering Loaded Distribution Panels

Example:

*JS-52 D3SF7 / (U)BJ28

Panel Type - Table A, Col 2
 Mounting Hole - Table B, Col. 1
 Jack Type - Table B, Col. 3/4 ("U" designates 75Ω)

*JS- Non-Insulated Panel (Open notch)
 *JSI- Insulated panel (Closed notch)

The 19" panels listed in Table A below accommodate the bulkhead jacks designated by a "*" in Panel Columns A- M of Table B to the right. For panel specifications: See page 51-54.

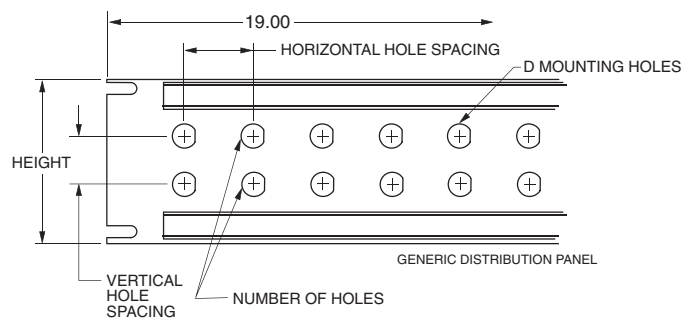


Table A: Panels

| Panel Type | # of Holes | Panel Height | Hole Spacing - Horiz. | Hole Spacing - Vert. |
|------------|------------|--------------|-----------------------|----------------------|
| JS(I)-12 | 12 | 1.75" | 1.430" | -- |
| JS(I)-16 | 16 | 1.75" | 1.000" | -- |
| JS(I)-20 | 20 | 1.75" | 0.830" | -- |
| JS(I)-24S | 24 | 1.75" | 0.723" | -- |
| JS(I)-24W | 24 | 3.50" | 1.430" | 1.000" |
| JS(I)-32 | 32 | 3.50" | 1.000" | 1.000" |
| JS(I)-40 | 40 | 3.50" | 0.875" | 0.875" |
| JS(I)-40W | 40 | 3.50" | 0.830" | 1.000" |
| JS(I)-52 | 52 | 3.50" | 0.675" | 1.000" |
| JS(I)-24 | 24 | 5.20" | 1.450" | 2.250" |

Note: Panels are 19" Insulated or Non-Insulated Standard Gray Aluminum. See chart on the right for loaded panel ordering.

"D" hole specifications are on page 54.

Table B: Jack/Panel Compatibility

| Mtg Hole | 75Ω | Jacks: 2/3/4 Lug | Threaded | Mtg Hole | 75Ω | Jacks: 2/3/4 Lug | Threaded |
|----------|-----|--------------------|----------|----------|-----|-------------------|------------|
| DD4 | U | AD 95 | | D11 | | BJ 89 | BJ389 |
| DD4 | U | ADI 95 | | DD6 | | BJ 89, BJ893 | BJ389 |
| D5SF5 | U | BJ 20 | | DD1 | U | BJ 95 Large Body | |
| D3SF6 | U | BJ 21 | | DD4 | U | BJ 95 | |
| D2SF3 | U | BJ 26 | | DD4 | U | BJ 96 | |
| D8SF12 | U | BJ 26GF | | DD4 | U | BJ 98 | |
| D3SF7 | U | BJ 27 | | D2SF3 | | BJ 101 | |
| D3SF7 | U | BJ 28/BJ24 | | D2SF3 | | BJ 102 | |
| D8SF11 | U | BJ 28GF | | DD2SF14 | | BJ 130 | |
| D2SF3 | U | BJ 29-6 Large body | | DD2SF30 | | BJ 138 | |
| D3 | | UBJ 29 | | DD2SF30 | | BJ 139 | |
| D5SF5 | | BJ 30 | BJ330 | D4 | | BJ 150/FL | BJ3150 |
| D3 | | BJ 31 | BJ331 | D9 | | BJ 152/FL | BJ3152 |
| D3 | | BJ 32 | BJ332 | D9SF12 | | BJ 153/FL | BJ3153 |
| D3SF8 | | BJ 38 | BJ388 | D9SF12 | | BJ 154/FL | BJ3154 |
| D3 | | BJ 39 | BJ339 | D9SF12 | | BJ 154AC/FL | BJ3154AC |
| D5SF5 | U | BJ 40 | | D6 | | BJ 157/FL | BJ3157 |
| D3SF6 | U | BJ 41 | | D5SF9 | | BJ 158/FL | |
| D2SF3 | U | BJ 46 | | D4SF4 | | BJ 159/FL | BJ3159 |
| D8SF12 | U | BJ 46GF | | D4SF4 | | BJ 159AC/FL | BJ3159AC |
| D3SF7 | U | BJ 47 | | D2SF3 | U | BJ 226 | |
| D3SF7 | U | BJ 48 | | D8SF12 | U | BJ 226GF | |
| D8SF11 | U | BJ 48GF | | D3 | U | BJ 229 | |
| D2SF3 | U | BJ 49-6 Large body | | D2SF3 | U | BJ 246 | |
| D3 | | UBJ 49 | | D8SF12 | U | BJ 246GF | |
| D6 | | BJ 50/FL | BJ350 | D3 | | BJ 249 | |
| D4SF2 | | BJ 57/FL | BJ357 | D4SF9 | - | | BJ358 |
| D5SF9 | | BJ 58/FL | | DD8 | | BJ 450 | BJ3450 |
| D4SF4 | | BJ 59/FL | BJ359 | DD8 | | BJ 457 | BJ3457 |
| D2SF8 | | BJ 72/TL/FL | BJ372 | DD8SF31 | | BJ 459 | BJ3459 |
| D2SF8 | | BJ 73/TL/FL | BJ373 | D11 | | BJ 893 Large body | |
| D2SF24 | | BJ 74/TL/FL | BJ374 | D3SF7 | U | BJ2848 | Rear mount |
| D2SF24 | | BJ 74C/TL/FL | BJ374C | D4SF9 | | - | BJ3158 |
| D2SF24 | | BJ 75/TL/FL | BJ375 | D3SF7 | U | BJ4828 | Rear mount |
| D4SF25 | | BJ 77/TL/FL | BJ377 | D9SF12 | | CBJ155/FL/BJ155 | BJ3155 |
| D3SF13 | | BJ 78/TL/FL | BJ378 | D5SF10 | U | J 95 | |
| D3SF15 | | BJ 79/TL/FL | BJ379 | D4SF25 | | J152FLFT | |
| D3SF15 | | BJ 79C/TL/FL | BJ379C | D4SF25 | | J152FT | J3152FT |
| D1SF1 | | BJ 80, BJ803 | BJ380 | DD5SF6 | | FL 122 | |
| D1 | | BJ 83, BJ833 | BJ383 | DD8SF31 | | TBJ451/FL | |
| D1 | | BJ 88, BJ883 | BJ388 | | | | |

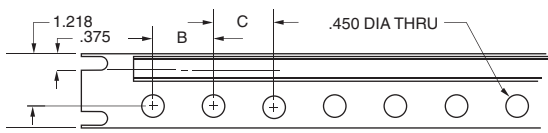


FIG A

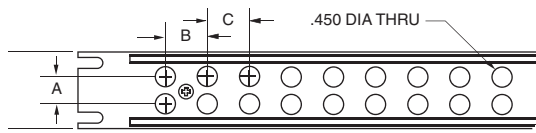


FIG B

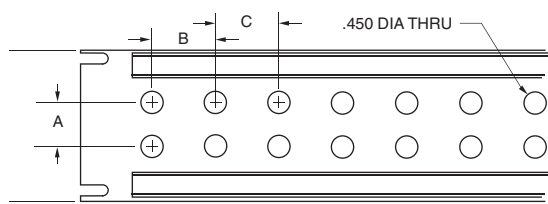


FIG C

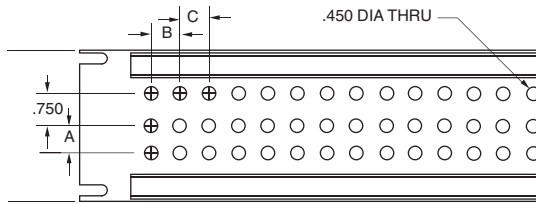


FIG D

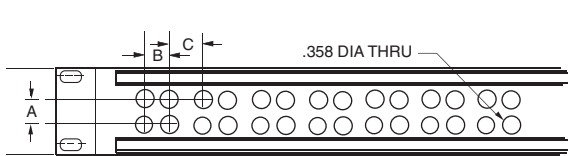


FIG E

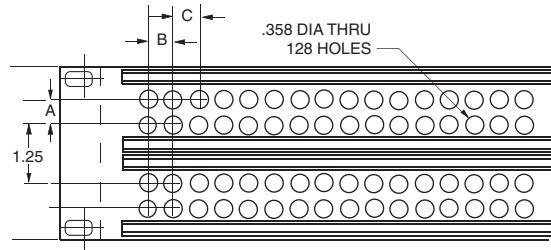


FIG H

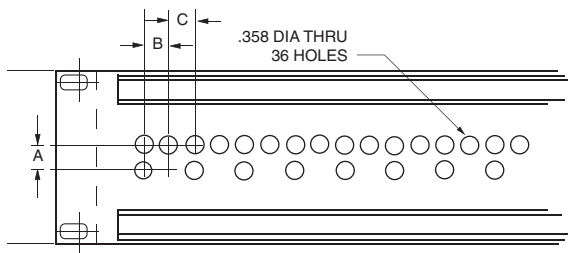


FIG I

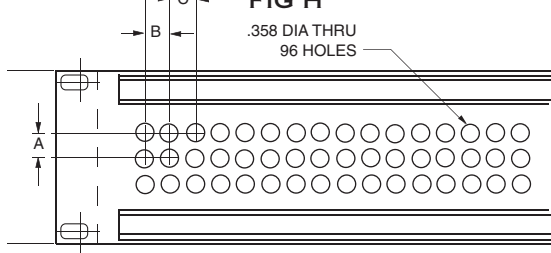


FIG J

19" Miniature Patch panels for: 50Ω J8 Series, J8D, and 75Ω Mini-WECO Jacks

| # of Patch Locations | Panel Height | Hole Spacing | | | Fig | Non-Insulated Part Number | Insulated Part Number | Jack Type |
|----------------------|--------------|--------------|------|------|-----|---------------------------|-----------------------|-----------|
| | | A | B | C | | | | |
| 32 | 1.75" | N/A | .500 | .500 | A | JS-32 | JSI-32 | J8 Series |
| 56 | 1.75" | .500 | .500 | .625 | E | | JSIX-56S | Mini-WECO |
| 56 | 1.75" | .500 | .500 | .625 | E | | JSIX-56SF | Mini-WECO |
| 64 | 1.75" | .500 | .500 | .500 | E | | JSIX-64S | Mini-WECO |
| 64 | 1.75" | .500 | .500 | .500 | E | | JSIX-64SF | Mini-WECO |
| 64 | 1.75" | N/A | .500 | .500 | A | JS-64 | JSI-64S | J8 Series |
| 64 | 3.50" | .500 | .500 | .500 | E | JS-64L | JSI-64L | J8 Series |
| 64 | 3.50" | .500 | .500 | .500 | E | | JSIX-64L | Mini-WECO |
| 96 | 3.50" | .500 | .500 | .500 | J | JS-96A | JSI-96A | J8 Series |
| 96 | 3.50" | Not Shown | | | | JS-96B | JSI-96B | J8 Series |
| 128 | 3.50" | .500 | .500 | .500 | H | | JSIX-128 | Mini-WECO |

Miniature 75Ω Coax Patch Panels ... for high density, low VSWR, 75Ω coaxial applications (microwave, sub-carrier telephone systems, etc.). Trompeter's J12 jack/ PL11C plug combination has a VSWR of 1:04:1 in the 60-80 MHz range. Miniature 50Ω Coax Patch Panels... for high density 50Ω patching. 19" panels tapped .312-32-2A to accept J8 and J8D jacks. .50" center-to-center vertical and horizontal hole spacing (unless otherwise noted), insulated and non-insulated panels have stiffener bars.

Note: For Front Loading Modular Panels, see page 12. "D" mounting hole specifications, see page 54. Many other panel configurations are available, contact customer service.

Patching Products / Standard 19" Panels

D Hole Specifications

| # of Holes | Panel Height | Hole Spacing | | | Foot Note | Fig | Non-insulated Part # | Insulated Part # | Insulated Phenolic Part # |
|------------|--------------|--------------|-------|-------|-----------|-----|----------------------|------------------|---------------------------|
| | | A | B | C | | | | | |
| 12 | 1.75" | - | 1.43" | 1.43" | 1 | A | JS-12 | JSI-12 | |
| 16 | 1.75" | - | 1.00" | 1.00" | 1 | A | JS-16 | JSI-16 | |
| 20 | 1.75" | - | .830" | .830" | 1 | A | JS-20 | JSI-20 | |
| 24 | 1.75" | - | .625" | .750" | 1 | A | JS-24S | JSI-24S | |
| 26 | 1.75" | - | .625" | .625" | 1 | A | JS-26 | JSI-26 | |
| 28 | 1.75" | - | .625" | .625" | 1 | A | JS-28 | JSI-28 | |
| 32 | 1.75" | .625" | 1.00" | 1.00" | 2 | B | JS-32S | JSI-32S | JSIB-32S |
| 40 | 1.75" | .625" | .830" | .830" | 2 | B | JS-40S | JSI-40S | JSIB-40S |
| 48 | 1.75" | .625" | .625" | .750" | 2 | B | JS-48S | JSI-48S | JSIB-48S |
| 52 | 1.75" | .625" | .625" | .625" | 2 | B | JS-52S | JSI-52S | JSIB-52S |
| 24 | 3.50" | .625" | 1.43" | 1.43" | 2 | C | JS-24L | JSI-24L | |
| 24 | 3.50" | 1.00" | 1.43" | 1.43" | 1 | C | JS-24W | JSI-24W | |
| 28 | 3.50" | .625" | 1.21" | 1.21" | 2 | C | JS-28A | JSI-28A | |
| 28 | 3.50" | 1.00" | 1.21" | 1.21" | | C | JS-28W | JSI-28W | |
| 32 | 3.50" | .625" | 1.00" | 1.00" | 2 | C | JS-32A | JSI-32A | JSIB-32A |
| 36 | 3.50" | .625" | .625" | .750" | 2 | I | JS-36 | JSI-36 | |
| 36 | 3.50" | .625" | .830" | .830" | 2 | C | JS-36A | JSI-36A | |
| 40 | 3.50" | .625" | .830" | .830" | 2 | C | JS-40 | JSI-40 | JSIB-40 |
| 40 | 3.50" | 1.00" | .830" | .830" | 1 | C | JS-40W | JSI-40W | JSIB-40W |
| 48 | 3.50" | .625" | .625" | .750" | 2 | C | JS-48 | JSI-48 | JSIB-48 |
| 48 | 3.50" | .625" | .625" | .625" | 2 | C | JS-48A | JSI-48A | JSIB-48A |
| 52 | 3.50" | 1.00" | .625" | .625" | | C | JS-52W | JSI-52W | JSIB-52W |
| 52 | 3.50" | .625" | .625" | .625" | 2 | C | JS-52 | JSI-52 | JSIB-52 |
| 56 | 3.50" | .625" | .625" | .625" | 2 | C | JS-56 | JSI-56 | JSIB-56 |
| 72 | 3.50" | .625" | .680" | .680" | 3 | D | JS-72 | JSI-72 | |

1 Will not accept dual jacks (e.g. J14, J214, J314, J74, HDVDP) 2 Will not accept jacks requiring hole spacing (A) larger than .625" 3 Will accept 3 barrel jack only

Note: JSIB (Fig. B and C) panels have .459 dia typ.

See page 59 for panel figure diagrams.

"D" Hole Specifications


Throughout the catalog you will find "D" holes called out for bulkhead jacks. The "D" hole is the cutout pattern designated for the proper fit of bulkhead jacks into distribution panels.

"D" Hole Type Maximum panel thickness **Example:** D3.148


| | "D" Hole Type | | | Double "D" Hole | |
|-----|---------------|-------|-----|-----------------|--------|
| | A | B | | A | B |
| D1 | .755" | .343" | DD1 | .630" | .532" |
| D2 | .630" | .281" | DD2 | .380" | .312" |
| D3 | .505" | .218" | DD3 | .505" | .443" |
| D4 | .439" | .187" | DD4 | .630" | .562" |
| D5 | .380" | .156" | DD5 | .475" | .436" |
| D6 | .317" | .128" | DD6 | .755" | .690" |
| D7 | .281" | .125" | DD7 | 1.140" | 1.060" |
| D8 | .605" | .280" | DD8 | .330" | .274" |
| D9 | .567" | .257" | | | |
| D10 | .192" | .079" | | | |
| D11 | 1.005" | .470" | | | |

Many other panel hole configurations available, contact customer service.

"D" Holes





Double "D" Holes



| | Circular Hole | | Double Circular Hole | |
|----|---------------|--|----------------------|-------------|
| | A | | | |
| C1 | .317"-.321" | | CC1 | |
| C2 | .380"-.385" | | A | .630" |
| C3 | .442"-.447" | | B | .370" |
| C4 | .474"-.480" | | C | .136"-.140" |
| C5 | .505"-.510" | | | |
| C6 | .755"-.760" | | | |

Circular Holes



Custom Cable Assembly Lines

Trompeter's coax patch cords and cable assemblies are of the highest quality and can be ordered in any length. Trompeter normally stocks popular lengths of 6", 12", 18", 24", 36", 48", 60", and 72". Standard coax patch cords and cable assemblies are made with the following cables: Patch Cords and Cable Assemblies are available in 50Ω RCA Standard or 75Ω Western Electric (WECo) Standard. The two standards are not intermateable. Trompeter stocks many other connector types for quick turnaround of custom cable assemblies including:

D-Subs & Backshells:

Male & Female 9, 15, 25, 37 pin and more

SMA/SMB/SMCs:


Straight and Right Angles for RG-58, RG-142, RG-174, RG-188, RG-316, and RG-400



| Impedance | Cable Type | Trompeter Cabl Part # |
|-----------|------------|-----------------------|
| 50Ω | RG-58 | TCC-50-2 |
| 75Ω | RG-59 | TCC-75-2 |
| 93Ω | RG-62 | N/A |

Patch Cords (see p/n below) Patch Plug to Patch Plug


- 50Ω RCA Plug Center Pin .070"..... PC-L-Z
- 75Ω WE Center Pin .090"..... PCW-L-Z
- 75Ω Mini-WECo..... PCMW-L-Z



Cable Assembly BNC Plug to BNC Plug


Tool Crimp BNC

- 50Ω..... PCYC-L-Z
- 75Ω..... UPCYC-L-Z



Cable Assembly Patch Plug to Push-on Plug


- 50Ω RCA Plug Center Pin .070" to 50Ω Push-on..... PCPX-L-Z
- 50Ω RCA Plug Center Pin .070" to 75Ω Push-on..... UPCPX-L-Z
- 75Ω WE Center Pin .090" to 50Ω Push-on..... PCPWX-L-Z
- 75Ω WE Center Pin .090" to 75Ω Push-on..... UPCPWX-L-Z



Cable Assembly BNC Plug to BNC Plug


Wrench Crimp

- 50Ω BNC..... PCY-L-Z
- 75Ω BNC..... UPCY-L-Z



Cable Assembly Patch Plug to BNC Plug

- 50Ω RCA Plug Center Pin .070" to 50Ω BNC..... PCX-L-Z
- 50Ω RCA Plug Center Pin .070" to 75Ω BNC..... UPCX-L-Z
- 75Ω We Center Pin .090" to 50Ω BNC..... PCWX-L-Z
- 75Ω We Center Pin .090" to 75Ω BNC..... UPCWX-L-Z



Z = denotes impedance of connecting cable in ohms. L = denotes length in inches.

Patching Products / Custom Cable Assemblies

Custom Cable Assemblies

Trompeter has been producing high quality cable assemblies, and currently provides over 500,000 different configurations using a broad range of RF connectors and cable types. We stock a variety of components for camera, RGB, S-Video, Audio, and many other applications.

Capabilities

Trompeter can provide coax, twinax, and triax cable assemblies using any cable attached connector. This includes panel mount, data bus, multi-pin, D-Subs, SMA connectors, and patching products. Special marking (ID sleeves/tags, hot stamping, colored cable jacket, etc.) is available. Trompeter offers 24-48 hour turnaround on many standard products with full capabilities for sustained volume delivery. Deliveries can be adjusted to meet your specific needs.



Photo: Twinax/Triax connectors on ruggedized dual twinax/triax test cable (fire retardant cables).

Quality Assurance... ISO 9001 Registered

Trompeter's assemblies are 100% electrically tested for continuity, shorts, and Hi-Pot.

(VSWR, IR, Insertion / Return Loss test capabilities, SPC data available on request).

Request For Quote...

Please refer to the following guideline when requesting a quote:

| 1 | 2 | 3 | 4 | 5 | 6 |
|-----|--------|-------|--------|--------|-----------------------|
| Qty | Conn 1 | Cable | Conn 2 | Length | Special Requirements |
| 12 | UPL220 | 735A | PL11C | 60" | Bend relief on Conn 1 |
| | | | | | |
| | | | | | |

- 1 Quantity Select quantity
- 2 Conn1 Select connector type from catalog
- 3 Cable Select cable from pages 74-91
- 4 Conn2 Select connector type from catalog
- 5 Length In inches
- 6 Write out any special marking, testing, bend relief, packaging, or other requirements.

Example Shown: 60 inch coax cable assembly using AT&T 735A, BNC plug, and Mini-WEC0 patch plug with bend relief on BNC plug.

Coax Terminations and RFI (Dust Caps)

Trompeter provides termination and RFI cap for all our connectors. Resistors are normally ¼ watt for subminiature connectors and ½ watt for miniature and standard size connectors (1% tolerances for all).

Ordering Instructions

For Terminations Example: PL75 Termination for TRB jacks with 78Ω resistance and no chain.

Order part number: **TNG1-6-78-D3**
 Part number from list _____
 Chain options _____
 R-Resistance _____
 D Ring option (see below) _____

For RFI Caps Example: Patch plug cap for a J74 twinax/triax jack with no chain.

Order part number: **RFI70-6-D3**
 Part number from list _____
 Chain options _____
 D Ring option (see below) _____

Chain Options

| Length | Chain Type | Chain Numbers |
|----------------------|-------------------------------|---------------|
| N/A | No Chain | -1 |
| 3.0" | Brass Chain | -4 |
| 6.0" | Brass Chain | -6 |
| 10.0" | Brass Chain | -10 |
| Stainless-steel rope | | |
| 3.0" | Jacketed Stainless-steel rope | -13 |
| 6.0" | Jacketed Stainless-steel rope | -14 |

Stainless Steel Rope with Mounting Rings

We now provide stainless steel rope with “D” rings. To order mounting ring for jacks with the “D” mounting hole numbers listed on the right, add the “D” ring number to the part number.

For Example: [RFI20-12-D2](#)

D Ring Options

| Inside Diameter | D-Ring# | Inside Diameter | D-Ring# |
|-----------------|---------|-----------------|---------|
| .755" | -D1 | .281" | -D7 |
| .630"-.635" | -D2 | .610" | -D8 |
| .505"-.510" | -D3 | .567" | -D9 |
| .439"-.443" | -D4 | | |
| .380"-.384" | -D5 | | |

Coax Terminations & RFI Caps

| Parts to be capped | Description | Terminator | RFI (Dust Caps) |
|--------------------|---------------------------|----------------------------------|-----------------------------------|
| BJ20/CJ20 Series | BNC, Jack | (U)TNASP1-(3)-R (Push on) | RFI25-(3) |
| BJ20/CJ20 Series | BNC, Jack | (U)TNAS1-(3)-R (Short) | RFI25-(3) |
| BJ20/CJ20 Series | BNC, Jack | (U)TNA1-(3)-R | RFI25-(3) |
| BJ20/CJ20 | BNC, Jack | (U)TNAP1-(3)-R | RFI25-(3) |
| BJ40/CJ40 Series | TNC, Jack | (U)TNH1-(3)-R | RFI45-(3) |
| BJ50/CJ50 Series | TPS, Jack | TNB1-(3)-R (Push on) | RFI55-(3) |
| BJ50FL Series | TPS, Jack | TNBP1-(3)-R (Push on) | RFI55FL-(3) |
| BJ50/BJ350 | TPS/TCM, Jack | TNBP1-(3)-R (Push on) | RFI355-(3) |
| BJ95 | N, Jack | (U)TNN1-(3)-R | RFI95-(3) |
| BJ130 | F, Jack | TNF1-(3)-R | RFI130-(3) |
| J3 | RCA, Patch Jack | TP-(3)-R | RFI20-(3) |
| J3W | WECO Patch Jack | TPW-(3)-R | RFI20-(3) |
| J8 | Mini-WECO Coax Patch Jack | TPM-(3)-R | RFI50-(3) |
| J11 | Mini-WECO Patch Jack | TPMW-(3)-R | RFI150-(3) |
| J94 (90 Series) | Patch Jack | TNP1-(3)-R | RFI94-(3) |
| J94 (90 Series) | Patch Jack | TPP-(3)-50 (Push-on) | RFI94-(3) |
| PL20 Series | BNC, Plug | (U)TNAF1-(3)-R | RFI21-(3) |
| PL50 | TPS, Plug | | RFI57-(3) |
| PL220 Series | BNC, Plug | (U)TNAF1-(3)-R | RFI21-(3) |
| PL40 Series | TNC, Plug | (U)TNHF1-(3)-R | RFI41-(3) |
| PL95 | N, Plug | (U)TNNBJ1-(3)-R (Bulkhead Mount) | RFI97-(3)/ RFI597-(3) Safety wire |


Notes: (3) See Chain options. “U: Designates 75 ohm version available. “R” Resistance. If you cannot find the RFI cap or termination, contact customer service.

Patching Products / Adapters

Circuitry Schematics


Custom Adapters Ordering Format

Adapters indexed with a designated number are **standard adapters**, refer to page 46 for identifications. Adapters index with a “•” are **custom adapters** and may be ordered using the example below. For adapters not referenced contact customer service.



Ordering Example:

Conn #1 **BJ20** Bnc Jack
 Schematic **E1** Circuit Code
 Conn # 2 **PL75** TRB Plug



Adapter Circuitry Schematics

| Concentric Twinax/Triax to Concentric Twinax/Triax | 2-Pin Twinax to 2-Pin Twinax | Coax 2-Pin Twinax | Coax to Concentric Twinax/Triax | 2-Pin Twinax to Concentric Twinax/Triax | Coax to Coax |
|--|------------------------------|--------------------|---------------------------------|---|--------------|
| A1 | C1 | D1 | E1 | G1 | K1 |
| A2 | C2 | D2 | E2 | G2 | K2 |
| A3 | C3 | D3 | E3 | G3 | K3 |
| A4 | C4 | D4 | E4 | G4 | |
| A5 | C5 | D5 | E5 | | |
| A6 | C6 | D6 | | | |
| A7 | C7 | D7 | | | |
| A8 | | D8 | | | |
| | ● BLUE CENTER COND | ● BLUE CENTER COND | | ● BLUE CENTER COND | |

Patching Products / Adapter Table

Coax/Twinax/Triax

Coax/Twinax/Triax Adapters

| | | TPS | | TCM | BNC | | | | PUSH ON | | TNC | | | | N | | | | TRS | | | | TTM | | TRB | | TRC/TRN | | |
|----------|--|-----|---|-----|-----|---|---|---|---------|---|-----|---|---|---|---|---|----|----|-----|----|----|----|-----|----|-----|----|---------|---|---|
| | | F | M | | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U | U |
| | <i>I</i> - Insulated <i>B</i> - Bulkhead Mount <i>U</i> - 75 Ohm Available <i>F</i> - Female <i>M</i> - Male | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TRB | BJ154 | F | B | I | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ154FL | F | B | I | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ157 | F | | | | | | | | | | | | | | | 32 | 22 | 32 | | | | | | | | | | |
| | BJ157FL | F | | | | | | | | | | | | | | | 59 | 23 | 59 | | | | | | | | | | |
| | BJ159 | F | B | | | | * | * | * | * | * | * | * | * | * | | 22 | 22 | 22 | | | | | | | | | | |
| | BJ159FL | F | B | | | | * | * | * | * | * | * | * | * | * | | | | 23 | 23 | | | | | | | | | |
| | CJ150 | F | | | | | * | * | * | * | * | * | * | * | * | | 32 | 22 | 32 | | | | | | | | | | |
| | CJ150FL | F | | | | | * | * | * | * | * | * | * | * | * | | 59 | | 59 | | | | | | | | | | |
| | PL150 | M | | | | | * | * | * | * | * | * | * | * | * | | | 23 | | | | | | | | | | | |
| PL153 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | | |
| PL155 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | | |
| PL155FL | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | | |
| TTM | BJ3154 | F | B | I | | | * | * | * | * | * | * | * | * | * | | | | | 68 | 68 | 68 | | | | | | | |
| | BJ3159 | F | B | | | | * | * | * | * | * | * | * | * | * | | | | | 31 | 31 | 31 | | | | | | | |
| | CJ3150 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | 33 | 31 | 33 | | | | | | | |
| | PL3155 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| TRB | BJ74 | F | B | I | | | * | * | * | * | * | * | * | * | * | | | | | | | 18 | | | | | | | |
| | BJ74TL | F | B | I | | | * | * | * | * | * | * | * | * | * | | | | | | | | | 39 | | | | | |
| | BJ74FL | F | B | I | | | * | * | * | * | * | * | * | * | * | | | | | | | | 40 | | | | | | |
| | BJ77 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | 18 | * | * | * | | | | |
| | BJ77TL | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | * | 39 | * | | | | |
| | BJ77FL | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | * | 40 | * | | | | |
| | BJ79 | F | B | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ79TL | F | B | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ79FL | F | B | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ79TLRG | F | B | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | CJ70 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | 18 | * | * | * | * | | | |
| | CJ70TL | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | 39 | * | * | * | * | |
| | CJ70FL | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | 40 | * | * | * | * | |
| | PL71 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| PL73 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | | |
| PL74 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | | |
| PL75 | M | * | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | | |
| PL75FL | M | * | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | | |
| TRT | PL375 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ374 | F | B | I | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ377 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ379 | F | B | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ379RG | F | B | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| TWBNC | CJ370 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ30 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ39 | F | B | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | CJ30 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| TWTNC | PL30 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ330 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ339 | F | B | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| TRC/ TRN | PL330 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ89 | F | B | * | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | 19 | | | | |
| | BJ89F | F | B | * | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | BJ893 | F | B | * | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | 41 | | | |
| | BJ893F | F | B | * | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | CJ80 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | CJ380 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | CJ803 | F | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | PL80 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| PL380 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | | |
| PL803 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | | |
| BJ389 | F | B | * | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | 38 | | | | |
| BJ389F | F | B | * | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | | |
| PATCH | J72D | F | B | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |
| | J150 | F | B | | | | | | | | | | | | | | 53 | 54 | 55 | 55 | | | | | | | | | |
| | PL150 | M | | | | | * | * | * | * | * | * | * | * | * | | | | | | | | | | | | | | |

Coax/Twinax/Triax Adapters Continued...

| | | TRB | | | | | | | | | | TRT | | | | TWBNC | | | TWTNC | | | | | | |
|---------|----------|------|--------|--------|------|------|--------|--------|------|------|--------|-------|-------|-------|-------|-------|------|------|-------|------|-------|-------|-------|-------|---|
| | | BJ77 | BJ77FL | BJ77TL | BJ79 | CJ70 | CJ70FL | CJ70TL | PL74 | PL75 | PL75FL | BJ374 | BJ377 | BJ379 | CJ370 | PL375 | BJ30 | BJ39 | CJ30 | PL30 | BJ330 | BJ339 | CJ330 | PL330 | |
| | | F | F | F | F | F | F | M | M | M | M | F | F | F | F | M | F | F | F | M | F | F | F | M | |
| TRS | BJ154 | F | B | I | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ154FL | F | B | I | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ157 | F | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ157FL | F | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ159 | F | B | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ159FL | F | B | | * | * | * | | | | | | | | | | | | | | | | | | |
| | CJ150 | F | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | CJ150FL | F | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | PL150 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | PL153 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| PL155 | M | | | * | * | * | | | | | | | | | | | | | | | | | | | |
| PL155FL | M | | | * | * | * | | | | | | | | | | | | | | | | | | | |
| TTM | BJ3154 | F | B | I | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ3159 | F | B | | * | * | * | | | | | | | | | | | | | | | | | | |
| | CJ3150 | F | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | PL3155 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| TRB | BJ74 | F | B | I | 18 | * | 18 | 18 | | | | | | | | | | | | | | | | | |
| | BJ74TL | B | B | I | * | 39 | | 39 | * | * | * | | | | | | | | | | | | | | |
| | BJ74FL | F | B | I | * | 40 | * | 40 | * | * | * | | | | | | | | | | | | | | |
| | BJ77 | F | | | 3 | | 34 | 3 | * | * | * | | | | | | | | | | | | | | |
| | BJ77TL | F | | | 29 | * | 29 | * | * | * | * | | | | | | | | | | | | | | |
| | BJ77FL | F | | | 28 | * | 28 | * | * | * | * | | | | | | | | | | | | | | |
| | BJ79 | F | B | | 34 | * | 34 | 34 | * | * | * | | | | | | | | | | | | | | |
| | BJ79TL | F | B | | 35 | * | | 35 | * | * | * | | | | | | | | | | | | | | |
| | BJ79FL | F | B | | 36 | * | | 36 | * | * | * | | | | | | | | | | | | | | |
| | BJ79TLRG | F | B | | | | | | | | | | | | | | | | | | | | | | |
| | CJ70 | F | | | 3 | * | 34 | 3 | * | * | * | | | | | | | | | | | | | | |
| | CJ70TL | F | | | 29 | * | | 29 | * | * | * | | | | | | | | | | | | | | |
| | CJ70FL | F | | | 28 | * | | 28 | * | * | * | | | | | | | | | | | | | | |
| | PL71 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | PL73 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | PL74 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| PL75 | M | | | * | * | * | | | | | | | | | | | | | | | | | | | |
| PL75FL | M | | | * | * | * | | | | | | | | | | | | | | | | | | | |
| TRT | PL375 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ374 | F | B | I | * | * | * | | | 25 | 25 | 25 | 25 | * | * | * | | | | | | | | | |
| | BJ377 | F | | | * | * | * | | | 25 | 12 | 26 | 12 | * | * | * | | | | | | | | | |
| | BJ379 | F | B | | * | * | * | | | 25 | 26 | 26 | 26 | * | * | * | | | | | | | | | |
| BJ379RG | F | B | | | | | | | | | | | | | | | | | | | | | | | |
| TWBNC | CJ370 | F | | | * | * | * | | | 25 | 12 | 26 | 12 | * | * | * | | | | | | | | | |
| | BJ30 | F | | | * | * | * | | | | | | | | 15 | * | * | * | | | | | | | |
| | BJ39 | F | B | | * | * | * | | | | | | | | 15 | 15 | 15 | * | * | * | | | | | |
| TWTNC | CJ30 | F | | | * | * | * | | | | | | | | 15 | * | * | * | | | | | | | |
| | PL30 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ330 | F | | | * | * | * | | | | | | | | | | | | | | | 37 | * | * | * |
| | BJ339 | F | B | | * | * | * | | | | | | | | | | | | | | | 37 | 37 | 37 | * |
| | PL330 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ89 | F | B | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ89F | F | B | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ893 | F | B | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ893F | F | B | | * | * | * | | | | | | | | | | | | | | | | | | |
| | CJ80 | F | | | * | * | * | | | | | | | | | | | | | | | | | | |
| TRC/TRN | CJ380 | F | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | CJ803 | F | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | PL80 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | PL380 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | PL803 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ389 | F | B | | * | * | * | | | | | | | | | | | | | | | | | | |
| | BJ389F | F | B | | * | * | * | | | | | | | | | | | | | | | | | | |
| | J72D | F | B | | 67 | | 67 | | | | | | | | | | | | | | | | | | |
| | J150 | F | B | | | | | | | | | | | | | | | | | | | | | | |
| | PL150 | M | | | * | * | * | | | | | | | | | | | | | | | | | | |

Adapters indexed with a designated number are standard adapters, use the table below to determine the part number. Adapters indexed with a “•” are custom adapters, see page 59.

| ID# | Part Number | ID# | Part Number |
|-----|------------------|-----|------------------|
| 1 | (U)AD28 | 41 | BJ883 |
| 2 | (U)AD48 | 42 | BJ58FL |
| 3 | AD78 (Note 2) | 43 | BJ138 |
| 4 | AD1 | 44 | AD192 |
| 5 | (U)AD95 | 45 | AD1W |
| 6 | (U)AD195 | 46 | ADH1 |
| 7 | AD122 | 47 | ADH1W |
| 8 | AD130 | 48 | ADM1 (Note 8) |
| 9 | AD131 | 49 | ADM2 (Note 8) |
| 10 | AD133 | 50 | ADMW12 (Note 9) |
| 11 | (U)AD142 | 51 | J11 (Note 9) |
| 12 | AD378 | 52 | J11B (Note 9) |
| 13 | (U)AD2848 | 53 | J152 (Note 11) |
| 14 | (U)BJ28 | 54 | J152FL (Note 12) |
| 15 | BJ38 (Note 3) | 55 | J3152 (Note 13) |
| 16 | (U)BJ48 | 56 | J3 |
| 17 | BJ58 | 57 | J3W |
| 18 | BJ73 (Note 2) | 58 | (Note 10) |
| 19 | BJ88 | 59 | AD158FL |
| 20 | (U)BJ98 | 60 | J3F |
| 22 | BJ158 (Note 4) | 61 | J3WF |
| 23 | BJ158FL (Note 5) | 62 | J5 |
| 24 | BJ358 | 63 | J5W |
| 25 | BJ373 | 64 | (U)J9 |
| 26 | BJ378 | 65 | (U)J9W |
| 27 | (Note 1) | 66 | J8 |
| 28 | AD78FL | 67 | J72 |
| 29 | AD78TL | 68 | BJ3153 |
| 30 | BJ24 | | |
| 31 | BJ3158 (Note 6) | | |
| 32 | AD158 | | |
| 33 | AD3158 | | |
| 34 | BJ78 | | |
| 35 | BJ78TL | | |
| 36 | BJ78FL | | |
| 37 | BJ338 | | |
| 38 | BJ388 (Note 7) | | |
| 39 | BJ73TL | | |
| 40 | BJ73FL | | |

(U) = 75 ohm version available (Note) = See below

Standard Adapter notes:

| Note: | 1 | Bulkhead Mounted BNC Side (U)BJ4828 | Bulkhead Mounted TNC Side (U)BJ2848 |
|-------|---|-------------------------------------|-------------------------------------|
| 2 | Polarization Table (Callcustomer service) | | |
| 3 | Insulated Version | BJ33 | |
| 4 | Insulated Version | BJ153 | |
| 5 | Insulated Version | BJ153FL | |
| 7 | Insulated Version | BJ383 | |
| 8 | 50 Ohm Version Only | | |
| 9 | 75 Ohm Version Only | | |
| | J308 50 Ohm TCM Jack Threaded | | |
| 10 | Panel Mount J8D | | |
| | J311 75 Ohm TCM Jack to J8D | | |
| 11 | Threaded Panel Mount | J152 | |
| 12 | Threaded Panel Mount | J152FLFT | |
| 13 | Threaded Panel Mount | J3152FT | |

Tools & Accessories

Cable Strippers

Powered Cable Stripper



This powerful, low-cost, portable hand-held (less than 2.25 lbs) cable stripper delivers, production quality performance, and gives you up to 250 strips per charge (7.2 V Ni-cad battery without memory effect). The replaceable, 3-level cutter head, is preset to strip your coax cable for Trompeter's 220 Series, Tool Crimp BNC connectors. The cutter head has adjustable depth cutter blades for precision tuning. Precision ground, tool steel blades (hardens to Rockwell 64) give you up to 15,000 strips! Rapid Charger/Reconditioner recharges your Ni-Cad in only 1.5 hours! Fast charge: 1.5 hrs/Recondition in 3.1 hrs.

Powered Cable Stripper Kits (1-year Warranty)

Includes: 1 Driver, 1 Ni-Cad Battery Pack, 1 Cutter Head, 1 Rapid Charger/Reconditioner Station, and 1 Carrying Case.

Cable Type Stripper/Cutter head


For RG-59

BCS/C24T3D

For 8281

BCS/C24T3U

Manual Cable Stripping Tools

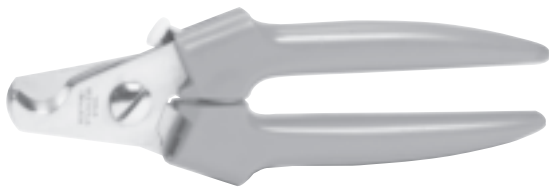

Cable Cutting Tool

Designed to cut Coax cable without compressing dielectric or damaging center conductor.

Cutting Tool
700-0024

Cutter Head Guide

| Cable Outside Diameter | 2-Blade Cut | 3-Blade Cut | D-Ring# |
|------------------------|-------------|-------------|---------|
| .070-.110 | C24T2A | C24T3A | -D7 |
| .160-.215 | C24T2B | C24T3B | -D8 |
| .190-.230 | C24T2C | C24T3C | -D9 |
| .235-.270 | C24T2D | C24T3D | -DD8 |
| .300-.430 | C24T2E | C24T3E | |
| .110-.160 | C24T2I | C24T3I | |
| .271-.305 | C24T2U | C24T3U | |

Important Note: The 3-level cutter heads included in the kits are set to the same stripping dimensions as our STC-F (see below) stripping cassette for Trompeter "Tool Crimp" BNC cable connectors.

Use 2-level cutter heads for Trompeter "Wrench Crimp" BNC cable connectors.

Additional Accessories

Extra Cutter heads

See guide above

DC Driver Battery: Requires cutter head from above

BCS

AC Driver and AC Base Unit: Requires cutter head from above

ACS

Rapid Charger/Reconditioner

BRCC

Ni-Cad Battery Pack

ABP-NSA

AC Power Converter

ACC-NSA

Manual Cable Stripping Tool

Tool (only) - Requires blade cassette listed



ST1

Cassette (For Tool Crimp BNC Connectors)

STC-F

Cassette (For Wrench Crimp BNC Connectors)

STC-W

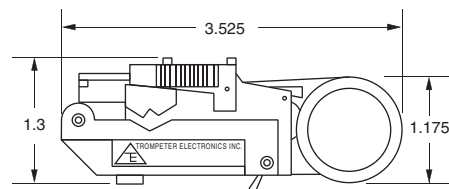

Crimp Tools



8-Point Crimp Tool

75Ω Center Contact Pin (Handle Color)

BNC/PL11 Patch Plugs (Red/Blue)..... 010-0097

BNC Jack and plug (Blue)..... 010-0088

12-Point Crimp Tool

75Ω Center Contact Pin (Handle color)

BNC/TNC/PL11 Patch Plug

(Green/yellow)..... 010-0098

For crimp dies not listed or for special embossing, call customer service.


| Outer Sleeve | A | Embosses | B | Embosses |
|--------------|------|----------|------|----------|
| CD3-1 | .213 | 1A | .178 | 1B |
| CD3-19 | .178 | 178 | .255 | 255 |



Crimp Tool

Die not included, for crimp dies see below

Frame CT 5

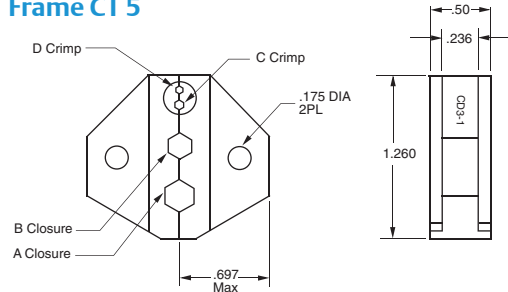

| Outer Sleeve | A | Embosses | B | Embosses |
|--------------|------|----------|------|----------|
| CD3-1 | .213 | 1A | .178 | 1B |
| CD3-2 | .324 | 2A | .255 | 2B |
| CD3-3 | .344 | 3A | .290 | 3B |
| CD3-5 | - | - | .197 | 5B |
| CD3-19 | - | - | | |
| CD3-21 | .290 | 290 | .255 | 255 |
| CD3-22 | .404 | 404 | .068 | - |

For crimp dies not listed, call customer service.




Twinax/Triax Crimp Tool

For Bushing/Shield

Crimp Tool Only..... M22520/5-01

Crimp Tool with Die..... M22520/5-01/CD5-#

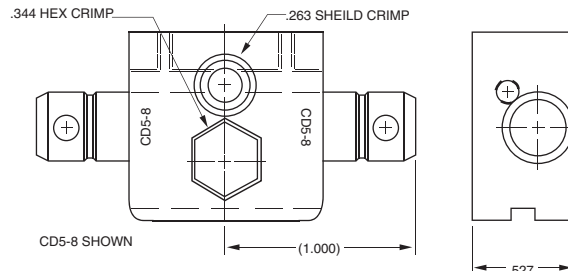

For Standard and Miniature Twinax/Triax patching: 70 Series: TRB/TRT, 150 Series: TRS/TTM, 450 Series: 2-lug/3-lug/threaded connectors.

| Connector Series | Cable Type | Cable Group # | Bushing/Shield Crimp Die | Center Contact Crimp Tool Part # | Center Contact Positioner Part # |
|--------------------|------------|---------------------------------|--------------------------|----------------------------------|----------------------------------|
| 70C | Twinax | 201-225 | CD5-8 | M22520/1-01 | 010-0044 Pin (TP837) |
| PLR70C PLR155AC | Triax | 301-309 | CD5-10 | | 010-0045 Socket (TP838) |
| Small Body 150AC | Twinax | 201-206, 208, 209, 217-223 | CD5-9 | M22520/2-01 | 010-0041 |
| | Triax | 301-304, 309 | CD5-11 | | |
| Large Body 150AC | Twinax | 207, 210, 211-216, 224-225 | CD5-8 | M22520/2-01 | 010-0043 |
| | Triax | 305-306, 308 | CD5-13 | | |
| | Triax | 307 | CD5-10 | | |
| PL75MC | Twinax | 201-225 | CD5-14 | M22520/2-01 | 010-0096 |
| | | 226 | CD5-15 | M22520/2-01 | 010-0096 |
| 450AC | Twinax | 201-206, 208, 209, 212, 217-223 | CD5-9 | M22520/2-01 | 010-0041 |
| PLR450 | Twinax | 201-206, 208, 209, 212, 217-223 | CD5-120 | M22520/2-01 | 010-0041 |
| SPC8P | Twinax | 201-205, 217, 218, 221, 222 | CD5-4 | M22520/2-01 | Daniels K709 |
| SPC8S | Triax | 301-303 | CD5-7 | | |

* Note: Dies imprint either cavity (A/B) or hex size onto crimp sleeve. Custom dies are available for special imprints.

Tools & Accessories

Cable Assembly Testers

Twinax/Triax Cable Assembly Tester



Twinax/Triax Cable Assembly Connector Test Set 010-0123-1

The Twinax/Triax Cable Assembly Tester is designed to test for opens, shorts, and cross wired connectors. The tester comes complete with terminators and testing instructions. This tool is designed to provide quick verification of TRB cable assemblies in the palm of your hands. The compact hand held unit measures 2 3/4" x 4 1/2" and provides versatility for testing connectors in the field. The unit comes in a soft zipper case which includes a 9v battery and terminators for standard TRB plugs. It can also be used for other connector families with an adapter, or short jumper cable when used with the proper termination.

- 3 Conductors which test for opens, shorts, and cross connects
- Concentric TRB Interface, which tests both Twinax and Triax
- Pass/Open/Short LED indicators
- Easy to follow testing instructions
- Complete with terminators, carrying case, and a 9V battery

BNC Coax Tester



Coax Cable Assembly Connector Test Set

- 75Ω BNC Plug..... 010-0133
- 75Ω MBNC Plug..... 010-0208

Mini-WECO Adapter (Continuity Only)

Sold Separately
105-1885

Designed to test for the proper assembly of BNC plugs with coax cables. Tests for center contact pin height and continuity (short or open). The new BNC tester is the same size as the twinax/triax tester but exclusively tests only BNC plugs. Mini-WECO continuity test adapter now available (sold separately).

- Compact design
- Pass/Open/Short LED indicators
- One test required for testing remote cable runs
- Easy to follow instructions
- Complete with terminators, case, and 9V battery
- On/Off switch


Tool Kit & Bulk Packaging

Tool Kits



| Tool Kit Part Number | Pin Height Indicator | Crimp Tool 8-Point Indentor | Crimp Tool 12-Point Indentor | BNC/Mini-WECO Electrical Gauge | Crimp Die | Center Contact Gauge |
|----------------------|----------------------|-----------------------------|------------------------------|--------------------------------|-----------|----------------------|
| TK4NL-1 | UPLCG-1 | 010-0097 | Not Included | Not Included | CD3-19 | Not Included |
| TK4NL-1A | UPLCG-1 | 010-0097 | Not Included | Not Included | CD3-19 | Not Included |
| TK4NL-2 | UPLCG-1 | Not Included | 010-0098 | Not Included | CD3-19 | Not Included |
| TK4NL-3 | UPLCG-1 | 010-0097 | 010-0098 | Not Included | CD3-19 | Not Included |
| TK4NL-4 | Not Included | 010-0097 | Not Included | 010-0108 | CD3-19 | Not Included |
| TK4NL-5 | Not Included | Not Included | 010-0080 | 010-0108 | CD3-19 | 010-0101 |

All Tool Kits Include: Case, [BCS Cable Stripper](#) with BCS Cutter heads (one [C24T3D](#) and one [C24T3I](#)), Cable Cutter (part number [700-0024](#)), and Ergonomic Crimp Tool w/long handle [CT4L](#) with Crimp Die [CD3-19](#) embosses the die cavity size on the crimp sleeve either .178 or .255. Contact customer service for custom tool kits.



BNC/TRB Cable Plug

| | Type | Length |
|--------------------|-------------|--------|
| RT1XL | straight | 22.00" |
| RT1L | straight | 12.00" |
| RTR-1L | right angle | 12.00" |
| RTR-1XL | right angle | 22.00" |
| RT1S | straight | 6.00" |
| RT1SS | straight | 3.75" |
| RTC-1L (insulated) | straight | 12.00" |

TPS, TCM, TRS, TTM, MBNC

| | Type | Length |
|--------------------|----------|--------|
| RT4L | straight | 12.00" |
| RT4S | straight | 6.00" |
| RTC-4L (insulated) | straight | 12.00" |



BNC Bulk Packaging

Bulk packaging for UPL220 Series BNC plugs ... Trompeter offers Tool Crimp BNC's bulk packed in convenient vacuum-formed plastic trays. Bulk packaging is perfect for OEM and high-volume, on-site installations.

Includes:

- (50) Body Assemblies
- (51) Crimp Sleeves
- (52) Center Contact Pins
- Assembly Instructions

Example: **UPL220-026/T50**

BNC part number, Vacuum Tray part number

For cable groups see pages 78-120. (Not available for cable groups -017)

BNC Coax Assembly Training Video

Trompeter has produced a video which outlines the major features of our BNC design, describes the tools for reliable installation, and gives step-by-step assembly instructions. The BNC Assembly Video CD is available at [no cost](#) to Trompeter Customers.

For additional information or for a free demonstration, contact your local Sales Representative log on to our web site at www.EmersonConnectivity.com and locate the rep nearest you.

Appendix

Trompeter Cable Specifications

Trompeter cables are manufactured to the listed specifications and offer optimum flexibility, shielding, and performance. Cables with stranded center conductors have greater flexibility and are recommended for short runs at low frequency where constant cable movement might fatigue a single copper-weld center conductor. Trompeter's **M17/176-00002** and **TWAC-78-1F2** are 200°C, Hi-Temp Cables for MIL-STD-1553B data bus applications. Dielectric and fillers made of PTFE (Teflon™) and outer jackets are PFA (Perfluoroalkoxy). All dimensions are in inches. All values without tolerances are *nominal* unless otherwise stated. **TWCH-78-2** has jacket constructed of *flame retardant halogen free polyolefin* with temperature range of -30°C to +80°C.

TWCP = Twinax Plenum Cable

TWCH = Twinax Blue Flame Retardant Halogen Free Polyolefin Cable


TRCH = Triax Yellow Flame Retardant Halogen Free Polyolefin Cable

Coax Cable Specs

| Cable Designation | TCC-50-2 | TCC-75-2 | RG62 A/U |
|------------------------------|--------------------|------------------|---------------|
| Impedance (Ohms) | 50±2 | 75±3 | 93±5 |
| Nominal outer dia. | 0.195 | 0.242 | 0.242 |
| PVC outer | Green | Violet | Black |
| Braid outer dia. | 0.150 Max | 0.191 Max | 0.191 Max |
| Braid AWG#/Mat'l | 36/Tinned Cu | 34/Bare Cu | 34/Bare Cu |
| Dielectric outer dia. | 0.116 | 0.146 | 0.146 |
| Dielectric mat'l | Solid PE | Foamed PE | PE |
| Conductor outer dia. | 0.0355 | 0.031 | 0.0253 |
| Conductor strands/Mat'l | 19/.0071 Tinned Cu | 7/.010 Tinned Cu | Solid/CCS |
| Operating temperature range | -40°C to 90°C | -40°C to 85°C | -40°C to 80°C |
| Minimum bend radius | 1.00 | 1.00 | |
| Max. Opr. VAC (RMS) | 1.4 KV | 800 V | 750 V |
| Capacitance pF/ft (Max) | 30.8 | 17.3 | 14.5 |
| Cond. Loop Res. (Ohms/M ft.) | | 17.6 | |
| Atten. dB/100 ft: | | | |
| 1 MHz | 0.380 | 0.335 | 0.250 |
| 10 MHz | 1.400 | 1.070 | 0.900 |
| 50 MHz | 3.40 | 2.40 | 1.90 |
| 100 MHz | 4.90 | 3.40 | 2.80 |
| 200 MHz | 7.30 | 4.85 | 3.70 |
| 400 MHz | | 9.00 | 5.20 |
| 1 GHz | 28.80 | 12.00 | 8.50 |
| 3 GHz | | 30.00 | |
| Shielded Coverage | 93% | 93% | 94.3% Min |

For high temperature cables, see chart on the next page.

Exploded Detail of Coax, Twinax, & Triax Cable

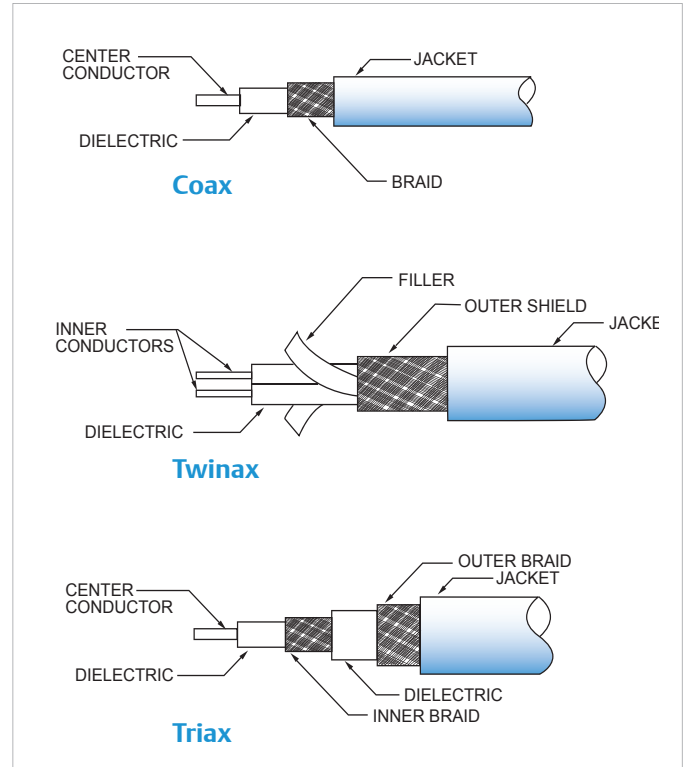

Trompeter Cable Specifications

Twinax/Triax Cable Specs

| Cable Designation | Twinax | | | | | | Triax | | | |
|------------------------------|---------------|---------------|-------------------|----------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | TWC-78-1 | TWC-78-2 | High Temperature: | | TWC-124-1A | TWC-124-2 | TRC-50-1 | TRC-50-2 | TRC-75-1 | TRC-75-2 |
| | | | M17/176-00002 | TWAC-78-1F2 | | | | | | |
| Impedance (Ohms) | 78±3 | 78±3 | 77±7 | 77±7 | 124±4 | 124±4 | 50±2 | 50±2 | 75±5 | 75±5 |
| Nominal outer dia. | 0.150 | 0.242 | 0.129 | 0.095 | 0.150 | 0.245 | 0.156 | 0.245 | 0.189 | 0.245 |
| Outer braid dia. | 0.108 | 0.195 Max | 0.102 | 0.070 | 0.105 | 0.195 Max | 0.121 | 0.210 Max | 0.150 | 0.205 |
| Core outer dia. | 0.085 | 0.154 | 0.084 | 0.052 | 0.085 | 0.162 | | | | |
| Dielectric outer dia. | 0.043 | 0.076 | 0.042 | 0.026 | 0.043 | 0.080 | 0.047 | 0.116 | 0.073 | 0.116 |
| Inner braid outer dia. | | | | | | | 0.069 Max | 0.146 Max | 0.093 | 0.146 Max |
| Inner jacket outer dia. | | | | | | | 0.101 | 0.175 | 0.130 | 0.175 |
| Conductor outer dia. | .022 | 0.0370 | 0.0230 Min. | 0.0149 | 0.0120 | 0.0220 | 0.0150 | 0.0370 | 0.0120 | .0185 |
| Operating temperature Range | -40°C to 80°C | -40°C to 80°C | -55°C to 200°C | -55°C to 200°C | -40°C to 80°C | -40°C to 80°C | -40°C to 75°C | -40°C to 80°C | -40°C to 80°C | -40°C to 80°C |
| Minimum bend radius (in.) | 1.50 Max | 1.25 | 1.50 | 1.25 | 1.50 | 1.25 | 0.75 | 1.25 | 1.00 | 1.25 |
| Max. Opr. VDC | 0.6 KV Max | 2.0 KV | | | 0.6 KV | 2.0 KV | 2.0 KV | 6.0 KV | 2.0 KV | 6.0 KV Max |
| Max. Opr. VAC (RMS) | 0.3 KV Max | 1.0 KV | 750 KV Max | 250 | 0.3 KV | 1.0 KV | 1.0 KV | 2.0 KV | 1.0 KV | 2.0 KV Max |
| Capacitance pf/ft. (Max) | 20.30 Max (2) | 21.20 (3) | 24.00 | 23.00 | 12.40 | 12.30 (3) | 29.50 | 32.00 (1) | 20.00 | 20.50 (1) |
| Cond. loop res. (Ohms/M ft.) | 179 Max | 19.00 Max | 48.00 | 146.00 | 570.60 | 56.80 Max | | | | |
| Atten. dB/100 ft.: | | | | | | | | | | |
| 1 MHz | 2.000 | 0.700 | 1.400 | 2.000 | 3.250 | 0.540 | 2.800 | 0.500 | 0.900 | 0.480 |
| 3 MHz | 3.000 | 1.100 | 2.100 | | 4.400 | 0.920 | 3.100 | 0.800 | 1.300 | 0.880 |
| 4 MHz | 3.500 | 1.400 | 2.400 | | 4.800 | 1.060 | 3.300 | 0.900 | 1.500 | 1.010 |
| 5 MHz | 4.000 | 1.550 | 2.800 | | 5.200 | 1.180 | 3.400 | 1.100 | 1.700 | 1.100 |
| 7 MHz | 4.500 | 1.800 | 3.500 | | 5.600 | 1.400 | 3.700 | 1.300 | 1.900 | 1.300 |
| 10 MHz | 5.300 | 2.200 | 4.50 Max | 6.500 | 5.900 | 1.650 | 4.100 | 1.500 | 2.400 | 1.500 |
| 20 MHz | 7.50 | 3.10 | | | 8.30 | 2.30 | 5.50 | 2.30 | 3.60 | 2.30 |
| 30 MHz | 9.20 | 3.90 | | | 10.20 | 2.80 | 7.00 | 2.90 | 4.50 | 2.90 |
| 40 MHz | 10.60 | 4.50 | | | 11.80 | 3.20 | 7.50 | 3.40 | 5.40 | 3.30 |
| 50 MHz | 11.90 | 5.10 | | | 13.20 | 3.60 | 9.10 | 3.90 | 6.10 | 3.60 |
| 100 MHz | 16.80 | 7.50 | | | 18.70 | 5.10 | 14.00 | 5.80 | 9.70 | 5.20 |
| 200 MHz | 23.70 | 10.50 | | | 26.40 | 7.20 | 22.00 | 8.80 | 16.50 | 7.60 |
| 500 MHz | 37.50 | 16.00 | | | 41.70 | 11.40 | 40.00 | 15.30 | 28.50 | 10.80 |
| 700 MHz | 44.30 | 18.60 | | | 49.40 | 13.50 | 50.00 | 18.00 | 36.00 | 14.70 |
| 1 GHz | 53.00 | 22.50 | | | 59.00 | 16.20 | 63.00 | 23.00 | 45.00 | 17.60 |
| Shielded coverage | 93% | 93% | 93.3% | 90% Min. | 93% | 93% | 93% Min. | 93% | 93% Min. | 93% |
| Twist per ft. | 8.00 | 4.00 | 11-14 | 16.00 | 8.00 | 4.00 | | | | |

Appendix

Twinax/Triax: Plenum/Halogen Free Cable Specs

| Cable Designation | Twinax | | | | | | Triax |
|------------------------------|-----------|-----------|----------------|------------|----------------|-----------------|----------------|
| | TWCP-78-1 | TWCP-78-2 | TWCH-78-2 | TWCP-124-2 | TWCP-124-3 | TWCP-124-5 | TRCH-50-2 |
| Description | Plenum | Plenum | Halogen Free | Plenum | Plenum | Plenum | Halogen Free |
| Impedance (Ohms) | 78±3 | 78±3 | 78±3 | 124±4 | 124±4 | 124±5 | 50±2 |
| Nominal outer dia. | 0.150 | 0.242 | 0.242 | 0.245 | 0.205 | 0.325 | 0.245 |
| Outer braid dia. | 0.102 | 0.165 | 0.195 | 0.183 | 0.183 | 0.295 | 0.210 |
| Core outer dia. | | | 0.154 | 0.163 | | | |
| Dielectric outer dia. | 0.041 | 0.072 | .076 | 0.080 | 0.062 | 0.134 | 0.116 |
| Inner braid outer dia. | | | | | | 0.043 | 0.146 |
| Inner jacket outer dia. | | | | | | | 0.175 |
| Conductor outer dia. | 0.021 | 0.037 | 0.037 | 0.024 | 0.024 | 0.048 | 0.037 |
| Operating temperature range | +125°C | +125°C | -30°C to +80°C | +125°C | -10°C to +75°C | -10°C to +125°C | -30°C to +80°C |
| Minimum bend radius (in/ft.) | 1.50 | 2.50 | 1.25 | 2.5 | 2.0 | 3.25 | 1.25 |
| Max. Opr. VDC | | | 2KV | | 2500 | 2500 | 6 KV |
| Max. Opr. VAC (RMS) | | | 1KV | 1KV | 1800 | 1800 | 2 KV |
| Capacitance pf/ft. (Max) | 19.6 (3) | 18.6(3) | 21.2(3) | 11.5 | 12.0(3) | 11.0(3) | |
| Cond. loop res. (Ohms/M ft.) | | | 19.0 | 47.0 | 28.4 | 6.5(3) | 10.5 |
| Atten. dB/100 ft.: | | | | | | | |
| 1 MHz | 2.00 | .60 | 0.70 | .50 | 0.60 | .30 | 0.50 |
| 3 MHz | 3.00 | 1.00 | 1.10 | .85 | 0.90 | .47 | 0.80 |
| 4 MHz | 3.50 | 1.20 | 1.40 | | 1.10 | .64 | 0.90 |
| 5 MHz | 4.00 | 1.40 | 1.55 | 1.10 | 1.20 | .69 | 1.10 |
| 7 MHz | 4.50 | 1.60 | 1.80 | 1.30 | 1.40 | .79 | 1.30 |
| 10 MHz | 5.30 | 2.00 | 2.20 | 1.60 | 1.60 | .94 | 1.50 |
| 20 MHz | 7.50 | 2.80 | 3.10 | 2.30 | 2.20 | 1.20 | 2.30 |
| 30 MHz | 9.20 | 3.50 | 3.90 | | 2.80 | 1.50 | 2.90 |
| 40 MHz | 10.60 | 4.10 | 4.50 | | 3.20 | 1.70 | 3.40 |
| 50 MHz | 11.90 | 4.60 | 5.10 | 3.70 | 3.60 | 2.00 | 3.90 |
| 100 MHz | 16.80 | 6.90 | 7.50 | 5.30 | 5.20 | 3.00 | 5.80 |
| 200 MHz | 23.70 | 9.90 | 10.50 | | 7.20 | 4.50 | 8.80 |
| 500 MHz | 37.50 | 15.40 | 16.00 | | 11.40 | 7.00 | 15.30 |
| 700 MHz | 44.30 | 18.30 | 18.60 | | 13.50 | 8.40 | 18.00 |
| 1 GHz | 53.00 | 21.80 | 22.50 | | 16.20 | 11.00 | 23.00 |
| Shielded coverage | 97% | 95% | 93% | 93% | 93% | 93% | 93% |
| Twist per ft. | 8.0 | 4.0 | 4.0 | 4.0 | 6.0 | 6.0 | |

Notes:

(1) = Center Conductor to Inner Braid

(2) = Conductor to Shield

(3) = Conductor to Conductor

Appendix

Connector Compatibility Tables

Twinax/Triax Wrench/Tool Crimp Connectors

Select your connector and read across to find available cable group numbers.

Twinax/Triax Wrench Crimp Connectors

Wrench Crimp Cable Groups

| Connector | 201 | 202 | 203 | 204 | 205 | 206 | 207 | 208 | 209 | 210 | 211 | 212 | 213 | 214 | 215 | 216 | 217 | 218 | 219 | 220 | 221 | 222 | 223 | 224 | 225 | 301 | 302 | 303 | 305 | 306 | 307 | 308 | 309 | | |
|----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
| BJ154AC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BJ154ACFL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BJ159AC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BJ159ACFL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CJ150AC(FL) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BJ3154AC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BJ3159AC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CJ3150AC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CJ70C(TL)(FL) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CJ370C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BJ74C(TL)(FL) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BJ374C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BJ79C(TL)(FL) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BJ379C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL73C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL74C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL75C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL75CFL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL153AC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL155AC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL155ACFL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL375C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PLR375C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL3155AC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PLR74C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PLR75CFL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PLR75C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PLR155AC(FL) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PLR3155AC(FL) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SPC8P | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SPC8S | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BJ459AC/GROUP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CJ450AC/GROUP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PL455AC/GROUP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PLR455AC/GROUP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Trompeter General Material/Finish Specifications

TFS-1: Finish Specifications

TFS-1A

.0001-.0003 max thk Bright Nickel per QQ-N-290, Class 1, Form SB (over)
.000080-.000150 thk Bright Copper per MIL-C-14550 (over) .0005 max Electroless Nickel per AMS-2404C, Class 1 (On Aluminum Only)

TFS-1B

.000020-.000030 thk Bright Gold2 per MIL-G-45204, Type II, Grade C, Class3 (over)
.000050-.000180 thk Bright Nickel3 per QQ-N-290, Class1 (over)
.000080-.000150 thk Bright Copper3 per MIL-C-14550

TFS-1D

.0001min-.000120 max thk Electroless Nickel per AMS 2404C (over)
.000080 min-.000150 max thk Bright Copper per MIL-C-14550

TFS-1E

.0002 min-.0003 max thk Bright Electro Tin per MIL-T-10727, Type 1 and solder test per Para. 4.6.3.1

TFS-1M⁴

.000200 min-.000300 max thk Silver per QQ-S-365, Type II (Semi-bright) Grade A (Chromate post treatment)
(over) .000080 min-.000150 max thk Bright Copper per MIL-C-14550

TFS-1T⁵

.000050-.000100 Bright Tin per MIL-T-10727, Type I (Electro Deposited)
(over) .000150-.00020 Sulfamate Nickel per MIL-P-27418
(over) .00010-.000150 Copper per MIL-C-14550, Class 4

TFS-1U⁶

.00020-.00030 thk Sulfamate Nickel per MIL-P-27418
(over) .000080-.000150 max thk Copper per MIL-C-14550

TFS-1V⁸

.000200-.000300 max thk Silver per QQ-S-365, Type I (Matte), Grade A (over)
.000050-.000180 max thk Sulfamate Nickel per MIL-P-27418, (over)
.000080 min-.000150 max thk Bright Copper per MIL-C-14550

Trompeter Finish Specification - 1 (TFS-1) Notes:

- (2) Bright Gold plate on all connector center contacts, pins, sockets, shall be .000050 min - .000070 max thk, Class 1
- (3) Thickness is in accordance with MIL-G-45204B, Para 6.3 "Strikes and Underplating"
- (4) Copper Alloy articles on which a nickel undercoat is not used shall not be used for continuous service at temperatures above 149°C (300°F) QQ-S-365, Para. 3.3.5.
- (5) For use on Brass and Beryllium Copper body (shell) and accessory components when 500 hour salt spray test is specified. (For test conditions, refer to MIL-C-38999, Para. 3.16 and 4.7.12.2, [Method 1001.1 of MIL-STD-1344])
- (6) Plating thickness variations, critical and noncritical areas must be plated to within specified lower limits, except where surfaces cannot be contacted by a .75 inch dia ball, noncritical areas total plating thickness may exceed the specified upper limits by .000150 maximum.

| Materials | Alloy or Type | FED/MIL Spec. | Usage |
|--------------------------------|---|--------------------------------|---|
| ABS | Moldings Type 2 | MIL-STD-1803 L-P-1883B | Looping plug handles, lock pins |
| Acetal | Dupont Delrin | L-P-392 | Insulators, cases, bushings |
| Aluminum | 2024-T351 | QQ-A255/6 | Backbars, cases |
| | 6061-T6 | QQ-A200/8 | Stiffener bars |
| | 6061-T6 | QQ-A250/11 | Patch panels |
| | 6061-T6511 | QQ-A200/8 | Backbars, cases |
| Beryllium Copper | 17200 (Bar) | ASTM-B-194 | Contact & crescent springs |
| | 17300 (Flat) | ASTM-B-196 & 197 | Contact sockets, fingersprings, washers |
| Brass | C26000 | ASTM-B-36 | Ground lugs, washers |
| | C36000 | ASTM-B-16 | Connector bodies, coupling sleeves, clamp nuts, hex mtg. nuts, ctr. contact pins, cases |
| Dupont Acetal Resin #500TL | Homopolymer General Purpose w/ 1.5% Teflon Micropower | | Moldings |
| Fluorinated Ethylene Propylene | (FEP) | ASTM-D-2116 | Insulators |
| Hyflon | MFA Grade 640 | | Alternate material dielectric |
| Loctite | 495 (Zinc Iridite per ASTM-B633) | QQ-2-325 Type 2 Class 2 Finish | |
| Nylon | 6/6 or 6/12 | L-P-410A | Insulating bushings |
| Perfluoroalkoxy | (PFA) | ASTM-D-3307 | Cable jackets |
| Phenolic | XXX | L-P-513 PBE | Patch panels, backbars |
| Phosphor Bronze | Alloy 544 | ASTM-B-139 | Contact springs, lockwashers |
| Polytetrafluoroethylene | (PTFE) | ASTM-D-1710 | Dielectrics, insulators |
| Polyvinylidene Flouride | | MIL-I-23053/8 | Sealing Sleeves |
| Rubber | Silicone | ZZ-R-765 | Gaskets, O-rings, sealing members |
| Solder | Sn60, 62, 63, or 96 | QQ-S-571 | |
| Steel | C1010-1018 | QQ-S-636 | MPN cases |
| | Music Wire | ASTM-A228 SAE J178 | Tension springs |
| Steel CRS | Type 17-4PH | AMS-5643 Tubing | |
| Corrosion Resistant Steel | 303 | QQ-S-763 | Connector bodies, coupling sleeves, hex mtg. nuts |
| | 302 | QQ-S-766 | Designation strips |
| | 301 | ASTM-484, A582 | |
| Thermo-plastic Polyester | Glass Filled | MIL-M-24519 | Heat resistant molded insulators |
| Vinyl | Clear Rigid-Self ext. | ASTM-D-635 | Designation strip window |
| | Opaque Rigid-Self ext. | ASTM-D-635 | Designation strip marking strip |
| Zinc | Alloy #3 | ASTM-B-240/B-86 | Selected non-functional parts |

TFS = Trompeter Finish Specifications

| Frequency Range | Connectors | | | | | Patching | | |
|-------------------|-----------------------|-----------------------|-----------------------|------------------------|----------------------|----------------------|----------------------|----------------------|
| | BNC | TNC | 70 Series | 150 Series | 450 Series | WE Standard | WE Miniature | RCA Standard |
| | 0-4 GHz | 0-11 GHz | 0-500 MHz | 0-500 MHz | 0-2 MHz | 0-1 GHz | 0-1 GHz | 0-200 MHz |
| VSWR | 1.30 Max. | | Not Rated | | | 1.04 @ 75 MHz | 1.06 Max. | 1.05 @ 50 MHz |
| | | | | | | 1.12 @ 100 MHz | - | 1.09 @ 100 MHz |
| | | | | | | 1.18 @ 500 MHz | - | 1.33 @ 500 MHz |
| Voltage Rating | 500 VRMS @ Sea Level | 500 VRMS @ Sea Level | 400 VRMS @ Sea Level | 250 VRMS @ Sea Level | 150 VRMS @ Sea Level | 500 VRMS @ Sea Level | 250 VRMS @ Sea Level | 500 VRMS @ Sea Level |
| | 125 VRMS @ 70,000 ft. | 125 VRMS @ 70,000 ft. | 100 VRMS @ 70,000 ft. | 62.5 VRMS @ 70,000 ft. | Not Rated | Not Rated | | |
| Temperature Range | -65°C to 165°C | | | -65°C to 200°C | -65°C to 165°C | -65°C to 165°C | | |

Appendix

BNC Tool/Wrench Crimp Assembly Illustrations


BNC Coax Tool Crimp Assembly Illustration

Step 1

1. Place crimp sleeve onto cable with the step located away from the cut end as shown.
2. Strip cable as shown and flare braid.
3. On connectors with cable group number -001 thru -007, and -027 only, slide filler sleeve fully under braid, then bushing under cable dielectric.
4. Crimp contact pin in position shown.

Step 2

1. Push cable assembly into the body until the contact pin snaps into place.
2. Slide crimp sleeve forward over braid, up against the body assembly and crimp in place.

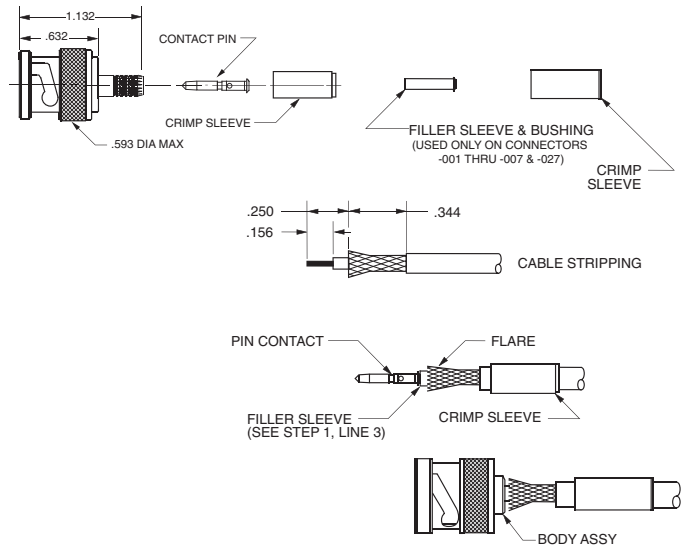

BNC Coax Wrench Crimp Assembly Illustration

Step 1


1. Place clamp nut onto cable.
2. Strip cable as shown and flare braid to allow free entry of cone (Lateral slits 180° apart may be required for very inflexible jacket materials).
3. Lightly tin center conductor (optional).

Step 2

1. Push edge of cone between cable dielectric and braid (or between foil and braid, if foil is present, and cone I.D. will accept it). Continue to push cable into cone until cable dielectric bottoms against cone dielectric. Center conductor should be visible in pin inspection hole.
2. Solder center conductor into pin.

Step 3

1. Bring clamp nut up onto tapered portion of cable.
2. Assemble body and engage with clamp nut.
3. Wrench tighten to 25-30 inch-pounds torque.

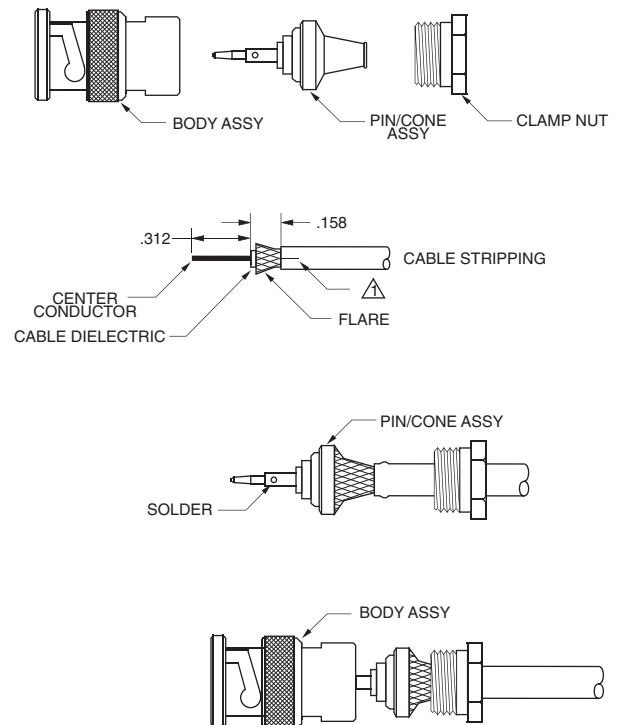

Notes: For Illustration purposes only. Not intended to replace actual installation instructions.

Cable Group Table Notes

If your cable group is not listed, contact customer service for assistance.

Trompeter provides cable connectors with configurations designed to provide tough, durable terminations on specific cables. Cable connector part numbers reference a specific cable group number for a specific cable type, model, and/or manufacturer. This *ensures* that the connector fits your cable and provides the toughest termination available in the industry.

If you know the part number and manufacturer of your cable, you can locate the cable's assigned cable group number using the cable group table in the following pages.


If you have a Trompeter connector, you can determine the cable group number by the last hyphenated suffix, (usually 1 to 3 digits).

Example: UPL220-026 = cable group number -026

Note: All dimensions in the proceeding Cable Group Table are in thousandths of an inch.

If you cannot satisfy your connector requirements with the standard cable group number, or have a special requirement, contact your local Trompeter representative listed on the back inside cover of this catalog, or you can visit our website at www.EmersonConnectivity.com to find the sales rep nearest you. Contact customer service for more information.

Note: Cables of the same type and specification may vary from manufacturer to manufacturer. Always verify the cable group number for your connector type and manufacturer.

The symbol -  after the part numbers listed in this catalog indicates that you should refer to the cable group table in the proceeding pages.

Wrench style = Wrench Crimp

Crimp style = Tool Crimp

Cable Group Table

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------------|------------|--------------|-------------|-------------|-----------|-----------|
| ALCATEL | 0960 WL | COAX | _ | -004 | 0.093 | 0.011 | 75 |
| ALCATEL | ASNE 0690 WL | COAX | _ | -004 | 0.093 | 0.011 | 75 |
| ALCATEL | CDE 003 | TWINAX | * | -204 | 0.140 | 0.024 | 77 |
| ALPHA | 8620 | COAX | -41 | -020 | 0.270 | 0.041 | 75 |
| ALPHA | 9059 | COAX | -2 | -013 | 0.242 | 0.026 | 75 |
| ALPHA | 9102 | COAX | * | -023 | 0.212 | 0.032 | 75 |
| ALPHA | 9108 | TWINAX | -55 | * | 0.210 | 0.038 | 78 |
| ALPHA | 9109 | TWINAX | _ | -213 | 0.252 | 0.037 | 100 |
| ALPHA | 9158 | COAX | -21 | * | 0.165 | 0.035 | 53 |
| ALPHA | 9174 | COAX | -5 | -003 | 0.100 | 0.021 | 50 |
| ALPHA | 9316 | COAX | -5 | -003 | 0.098 | 0.021 | 50 |
| ALPHA | 9807 | COAX | -51 | -016 | 0.304 | 0.032 | 75 |
| ALPHA | 9817 | TWINAX | -8 | _ | 0.327 | 0.038 | 100 |
| ALPHA | 9830 | COAX | -2 | -013 | 0.242 | 0.025 | 75 |
| ALPHA | 9840 | COAX | -2 | -013 | 0.240 | 0.025 | 80 |
| ALPHA | 9847 | COAX | _ | -053 | 0.405 | 0.064 | 75 |
| ALPHA | 9850 | TRIAx | -13 | TOO LARGE | 0.314 | 0.032 | 75 |
| ALPHA | 9858 | COAX | -1 | -011 | 0.193 | 0.036 | 50 |
| ALPHA | 2834/2 | TWINAX | -45 | _ | 0.137 | 0.032 | 600V |
| ALPHA | 9058C | COAX | -1 | -011 | 0.194 | 0.038 | 50 |
| ALPHA | 9179B | COAX | -5 | -004 | 0.101 | 0.012 | 75 |
| ALPHA | 9180B | COAX | -4 | * | 0.140 | 0.038 | 95 |
| ALPHA | 9187A | COAX | -36 | -004 | 0.105 | 0.010 | 75 |
| ALPHA | 9196A | COAX | -44 | -1 | 0.070 | 0.011 | 50 |
| ALPHA | 9804C | COAX | -41 | -020 | 0.275 | 0.040 | 75 |
| ALPHA | 9814C | TWINAX | * | -213 | 0.244 | 0.038 | 75 |
| ALPHA | 9818C | TWINAX | -8 | _ | 0.330 | 0.037 | 100 |
| ALPHA | 9825C | COAX | -6A | _ | 0.400 | 0.064 | 75 |
| ALPHA | 9861C | COAX | -1 | -011 | 0.192 | 0.038 | _ |
| ALPHA | 9871F | COAX | * | -011 | 0.182 | 0.037 | 50 |
| ALPHA WIRE | 2821/2 | TWINAX | -27 | _ | 0.138 | 0.024 | 600V |
| AMPHENOL | 82-5588 | TWINAX | -8 | _ | 0.330 | 00.39 | _ |
| AMPHENOL CNDA | 21-1060 | COAX | -6 | -016 | _ | _ | _ |
| AT&T (LUCENT) | 733 | COAX | _ | -027 | _ | _ | 75 |
| AT&T (LUCENT) | 1735A | COAX | _ | -026 | 0.128 | 0.016 | 75 |
| AT&T (LUCENT) | 2735A | COAX | -22 | -026 | 0.140 | 0.015 | 75 |
| AT&T (LUCENT) | 734D | COAX | -63 | -025 | 0.236 | 0.031 | 75 |
| AT&T (LUCENT) | 735A | COAX | * | -026 | 0.125 | 0.016 | 75 |
| AT&T (LUCENT) | NSI-4609 805 13019 | COAX | -37 | * | 0.166 | 0.016 | _ |
| AT&T (LUCENT) | 724 | COAX | -6 | -016 | 0.304 | 0.033 | _ |
| AT&T (LUCENT) | 728 | COAX | -6 | -016 | 0.304 | 0.033 | 75 |
| AT&T (LUCENT) | 731 | COAX | -2 | -015 | 0.248 | 0.023 | 75 |
| AT&T (LUCENT) | 730A | COAX | -2B | -015 | 0.255 | 0.025 | |
| AT&T (LUCENT) | 734A | COAX | -63 | -025 | 0.236 | 0.031 | 75 |
| AT&T (LUCENT) | KS-19224L2 | COAX | -31 | * | 0.116 | 0.011 | _ |
| AT&T (W.E.CO) | 16PEVL | TWINAX | -12 | _ | 0.460 | 0.051 | _ |
| AT&T (W.E.CO) | 754E | TWINAX | -10 | _ | 0.420 | 0.040 | _ |
| AT&T (W.E.CO) | 760A | TWINAX | -11 | TOO LARGE | 0.308 | 0.025 | _ |
| AT&T (W.E.CO) | 761A | TWINAX | -30 | | 0.215 | 0.021 | _ |
| BELDEN | 8208 | TWINAX | -25 | _ | 0.257 | 0.047 | 300V |
| BELDEN | 8212 | COAX | -2 | -014 | 0.242 | 0.032 | 75 |
| BELDEN | 8213 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| BELDEN | 8215 | COAX | -6E | -017 | 0.332 | 0.028 | 75 |
| BELDEN | 8216 | COAX | -5 | -003 | 0.103 | 0.020 | 50 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------|------------|--------------|-------------|-------------|-----------|-----------|
| BELDEN | 8218 | COAX | -22 | -009 | 0.150 | 0.017 | 75 |
| BELDEN | 8219 | COAX | -1 | -011 | 0.195 | 0.037 | 52 |
| BELDEN | 8221 | COAX | -2 | -013 | 0.242 | 0.025 | 80 |
| BELDEN | 8227 | TWINAX | -8 | _ | 0.330 | 0.039 | _ |
| BELDEN | 8232 | TRIAX | -13A | TOO LARGE | 0.312 | 0.032 | 75 |
| BELDEN | 8233 | TRIAX | -14 | _ | 0.475 | 0.064 | 75 |
| BELDEN | 8237 | COAX | -6A | _ | 0.405 | 0.085 | 50 |
| BELDEN | 8238 | COAX | -6A | _ | 0.405 | 0.048 | 75 |
| BELDEN | 8240 | COAX | -1 | -021 | 0.195 | 0.032 | 51.5 |
| BELDEN | 8241 | COAX | -2 | -013 | 0.242 | 0.025 | 75 |
| BELDEN | 8259 | COAX | -1 | -011 | 0.195 | 0.040 | 50 |
| BELDEN | 8261 | COAX | -6A | _ | 0.405 | 0.049 | 75 |
| BELDEN | 8262 | COAX | -1 | -011 | 0.192 | 0.038 | 50 |
| BELDEN | 8263 | COAX | -2 | -013 | 0.242 | 0.023 | 75 |
| BELDEN | 8267 | COAX | -6A | _ | 0.405 | 0.086 | 50 |
| BELDEN | 8268 | COAX | -6B | TOO LARGE | 0.425 | 0.089 | 50 |
| BELDEN | 8279 | COAX | -2A | -022 | 0.220 | 0.025 | 75 |
| BELDEN | 8281 | COAX | -6 | -016 | 0.307 | 0.030 | 75 |
| BELDEN | 8422 | TWINAX | -9 | _ | 0.231 | 0.025 | 1000V |
| BELDEN | 8441 | TWP | 30 | _ | 0.210 | 0.025 | 300V |
| BELDEN | 8450 | TWINAX | -27 | _ | 0.121 | 0.025 | 200V |
| BELDEN | 8451 | TWINAX | -23 | -210 | 0.140 | 0.031 | 300V |
| BELDEN | 9011 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| BELDEN | 9054 | COAX | -2 | -014 | 0.242 | 0.032 | 75 |
| BELDEN | 9060 | COAX | -41 | * | 0.284 | 0.040 | 75 |
| BELDEN | 9064 | COAX | -6A | _ | 0.400 | 0.064 | 75 |
| BELDEN | 9066 | COAX | -41 | -020 | 0.275 | 0.041 | 75 |
| BELDEN | 9068 | COAX | -22 | -009 | 0.146 | 0.016 | 75 |
| BELDEN | 9100 | COAX | -2 | -014 | 0.237 | 0.032 | 75 |
| BELDEN | 9104 | COAX | -2A | * | 0.243 | 0.032 | 75 |
| BELDEN | 9108 | COAX | * | -014 | 0.237 | 0.032 | 75 |
| BELDEN | 9110 | COAX | -2 | -014 | 0.242 | 0.032 | 75 |
| BELDEN | 9112 | COAX | -2 | _ | 0.242 | 0.032 | _ |
| BELDEN | 9114 | COAX | -41 | -020 | 0.270 | 0.040 | 75 |
| BELDEN | 9116 | COAX | -41 | -020 | 0.278 | 0.038 | 75 |
| BELDEN | 9141 | COAX | -6 | -016 | 0.304 | 0.033 | 75 |
| BELDEN | 9146 | COAX | 4 | _ | _ | _ | _ |
| BELDEN | 9165 | COAX | -2 | -013A | 0.242 | 0.030 | 75 |
| BELDEN | 9167 | COAX | -2 | -014 | 0.243 | 0.032 | 75 |
| BELDEN | 9168 | COAX | -41 | -020 | 0.275 | 0.040 | 75 |
| BELDEN | 9169 | COAX | -2B | -015 | 0.249 | 0.025 | 93 |
| BELDEN | 9170 | COAX | -4 | * | 0.140 | 0.022 | 75 |
| BELDEN | 9171 | COAX | -2 | -013A | 0.242 | 0.030 | 75 |
| BELDEN | 9201 | COAX | -1 | -021 | 0.193 | 0.033 | 52 |
| BELDEN | 9203 | COAX | -1 | -021 | 0.195 | 0.035 | 50 |
| BELDEN | 9204 | COAX | _ | -013 | 0.241 | 0.025 | 75 |
| BELDEN | 9207 | TWINAX | -8 | _ | 0.330 | 0.039 | 100 |
| BELDEN | 9209 | COAX | -63 | -019 | 0.226 | 0.022 | 75 |
| BELDEN | 9212 | COAX | -6A | _ | 0.405 | 0.048 | 75 |
| BELDEN | 9221 | COAX | -5 | -004 | 0.102 | 0.012 | 75 |
| BELDEN | 9222 | TRIAX | -7 | -306 | 0.239 | 0.040 | 50 |
| BELDEN | 9223 | COAX | -1 | * | 0.195 | 0.030 | 50 |
| BELDEN | 9228 | COAX | -2 | -013 | 0.242 | 0.025 | 93 |
| BELDEN | 9231 | COAX | -6 | -016 | 0.304 | 0.032 | 75 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

Cable Group Table

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------|------------|--------------|-------------|-------------|-----------|-----------|
| BELDEN | 9239 | COAX | -5 | -003 | 0.104 | 0.019 | 50 |
| BELDEN | 9240 | COAX | -2 | -014 | 0.241 | 0.032 | 75 |
| BELDEN | 9243 | COAX | -2 | -014 | 0.242 | 0.032 | _ |
| BELDEN | 9244 | COAX | -2 | -013 | 0.242 | 0.025 | 73 |
| BELDEN | 9248 | COAX | -41 | -020 | 0.270 | 0.036 | 75 |
| BELDEN | 9250 | TWINAX | -10 | _ | 0.420 | 0.046 | 95 |
| BELDEN | 9251 | COAX | -6A | _ | 0.405 | 0.085 | 52 |
| BELDEN | 9252 | COAX | * | -010 | 0.160 | 0.030 | 50 |
| BELDEN | 9254 | COAX | -22 | -009 | 0.142 | 0.019 | 75 |
| BELDEN | 9259 | COAX | -2A | -023 | 0.234 | 0.030 | 75 |
| BELDEN | 9265 | COAX | -2 | -014 | 0.242 | 0.031 | 75 |
| BELDEN | 9266 | COAX | -2 | -013A | 0.245 | 0.031 | _ |
| BELDEN | 9268 | COAX | * | -018 | 0.260 | 0.025 | 93 |
| BELDEN | 9272 | TWINAX | -9 | -213 | 0.242 | 0.037 | 78 |
| BELDEN | 9273 | COAX | -3 | -012 | 0.216 | 0.035 | 50 |
| BELDEN | 9274 | COAX | -2 | -014 | 0.242 | 0.032 | 75 |
| BELDEN | 9275 | COAX | -2 | -14 | 0.242 | 0.032 | 75 |
| BELDEN | 9284 | COAX | -41 | -020 | 0.275 | 0.040 | _ |
| BELDEN | 9291 | COAX | -2 | -013 | 0.242 | 0.025 | 80 |
| BELDEN | 9292 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| BELDEN | 9310 | COAX | * | -011 | 0.194 | 0.035 | 50 |
| BELDEN | 9311 | COAX | -1 | -011 | 0.193 | 0.037 | 52 |
| BELDEN | 9386 | COAX | -41 | -020 | 0.275 | 0.040 | _ |
| BELDEN | 9448 | COAX | -2 | -013 | 0.242 | 0.025 | _ |
| BELDEN | 9463 | TWINAX | -9 | -213 | 0.240 | 0.037 | 78 |
| BELDEN | 9555 | COAX | -2 | -013 | 0.242 | 0.023 | 75 |
| BELDEN | 9587 | COAX | -41 | -020 | 0.275 | 0.040 | 75 |
| BELDEN | 9589 | COAX | -2 | _ | 0.242 | 0.032 | _ |
| BELDEN | 9659 | COAX | -2 | -013A | 0.242 | 0.030 | 75 |
| BELDEN | 9764 | COAX | -6A | _ | 0.405 | 0.064 | 75 |
| BELDEN | 9815 | TWINAX | -8 | _ | 0.330 | 0.037 | 100 |
| BELDEN | 9841 | TWINAX | -9 | -215 | 0.256 | 0.025 | 120 |
| BELDEN | 9850 | COAX | -6B | _ | 0.425 | 0.048 | 75 |
| BELDEN | 9857 | COAX | -6A | _ | 0.405 | 0.025 | 125 |
| BELDEN | 9859 | TWINAX | * | -213 | 0.243 | 0.038 | 78 |
| BELDEN | 9860 | TWINAX | -46 | _ | 0.440 | 0.051 | 124 |
| BELDEN | 9861 | COAX | -6E | _ | 0.332 | 0.057 | 50 |
| BELDEN | 9880 | COAX | -48 | _ | 0.405 | 0.086 | 50 |
| BELDEN | 9907 | COAX | -1 | -011 | 0.185 | 0.037 | 50 |
| BELDEN | 46899 | COAX | -1 | * | 0.199 | 0.024 | 75 |
| BELDEN | 81553 | TWINAX | -47 | -201 | 0.129 | 0.024 | 77 |
| BELDEN | 82120 | COAX | -34 | -024 | 0.244 | 0.040 | 75 |
| BELDEN | 82121 | COAX | -52 | -024 | 0.240 | 0.040 | 75 |
| BELDEN | 82907 | COAX | -21 | * | 0.163 | 0.036 | 50 |
| BELDEN | 83241 | COAX | * | -011 | 0.187 | 0.037 | 50 |
| BELDEN | 83242 | COAX | -1 | -012 | 0.193 | 0.039 | 50 |
| BELDEN | 83264 | COAX | -5 | -004 | 0.100 | 0.012 | 75 |
| BELDEN | 83265 | COAX | -5A | -001 | 0.071 | 0.010 | 50 |
| BELDEN | 83266 | COAX | -22 | -008 | 0.141 | 0.012 | 95 |
| BELDEN | 83267 | COAX | -36 | -004 | 0.110 | 0.012 | 75 |
| BELDEN | 83269 | COAX | -5 | -003 | 0.100 | 0.018 | 50 |
| BELDEN | 83284 | COAX | -5 | -003 | 0.100 | 0.021 | 50 |
| BELDEN | 83303 | COAX | -44 | _ | 0.075 | 0.019 | 600V |
| BELDEN | 83310 | TWINAX | -29 | -207 | 0.120 | 0.031 | |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------|------------|--------------|-------------|-------------|-----------|-----------|
| BELDEN | 83317 | TWINAX | * | -223 | 0.112 | 0.019 | 600V |
| BELDEN | 83318 | TWINAX | -29 | -204 | 0.132 | 0.025 | 600V |
| BELDEN | 83319 | TWINAX | * | -221 | 0.139 | 0.032 | NC |
| BELDEN | 84142 | COAX | -1 | -021 | 0.195 | 0.037 | 50 |
| BELDEN | 84303 | COAX | -21 | -011 | 0.170 | 0.037 | 50 |
| BELDEN | 86262 | COAX | -2A | -022 | 0.220 | 0.025 | 93 |
| BELDEN | 87108 | COAX | -2A | -023 | – | – | – |
| BELDEN | 87120 | COAX | -52 | -024 | 0.256 | 0.040 | 75 |
| BELDEN | 88281 | COAX | -41 | * | 0.270 | 0.031 | 75 |
| BELDEN | 89108 | COAX | -2A | -023 | 0.218 | 0.032 | 75 |
| BELDEN | 89120 | COAX | -52 | * | 0.235 | 0.041 | 75 |
| BELDEN | 89162 | COAX | -2A | -019 | – | – | 75 |
| BELDEN | 89182 | TWINAX | -54 | – | 0.307 | 0.031 | 150 |
| BELDEN | 89248 | COAX | -52 | * | 0.222 | 0.040 | 75 |
| BELDEN | 89269 | COAX | -2A | -022 | 0.222 | 0.025 | 93 |
| BELDEN | 89272 | TWINAX | -55 | * | 0.220 | 0.039 | 78 |
| BELDEN | 89292 | COAX | * | -052 | 0.348 | 0.064 | 75 |
| BELDEN | 89555 | COAX | -53 | -019 | 0.230 | 0.023 | 75 |
| BELDEN | 89880 | COAX | -50 | – | 0.375 | 0.086 | 50 |
| BELDEN | 89907 | COAX | -21 (20/90) | * | 0.160 | 0.037 | 50 |
| BELDEN | 513945 | COAX | – | -052 | 0.405 | 0.064 | 75 |
| BELDEN | 533945 | COAX | -41 | -020 | 0.266 | 0.041 | 75 |
| BELDEN | 549945 | COAX | – | -023 | 0.232 | 0.032 | 75 |
| BELDEN | 551945 | COAX | – | -023 | 0.232 | 0.030 | 75 |
| BELDEN | 568937 | COAX | -36 | -027 | 0.123 | 0.016 | 75 |
| BELDEN | 573945 | COAX | -22 | -009 | 0.146 | 0.018 | 75 |
| BELDEN | 613948 | COAX | – | -025 | 0.348 | 0.064 | 75 |
| BELDEN | 1151A | COAX | -2 | -013A | 0.247 | 0.032 | 75 |
| BELDEN | 1152A | COAX | -41 | * | 0.280 | 0.040 | 75 |
| BELDEN | 1162A | TWINAX | -8 | – | 0.330 | 0.037 | 100 |
| BELDEN | 1163A | COAX | -6 | -016 | – | – | 100 |
| BELDEN | 1164B | COAX | -22 | -009 | 0.145 | 0.019 | 75 |
| BELDEN | 1167A | COAX | -22 | -009 | 0.152 | 0.020 | 75 |
| BELDEN | 1167B | COAX | -22 | -009 | 0.146 | 0.019 | 75 |
| BELDEN | 1168A | COAX | -141 | – | 0.141 | 0.037 | – |
| BELDEN | 1223A | COAX | -41 | -020 | 0.275 | 0.040 | 75 |
| BELDEN | 1263A | COAX | * | -009 | 0.160 | 0.021 | 75 |
| BELDEN | 1406B | COAX | -22 | -009 | 0.146 | 0.019 | 75 |
| BELDEN | 1407B | COAX | -22 | -009 | 0.146 | 0.019 | 75 |
| BELDEN | 1417B | COAX | – | -009 | 0.150 | 0.018 | 75 |
| BELDEN | 1418B | COAX | -22 | -009 | 0.150 | 0.015 | 75 |
| BELDEN | 1426A | COAX | -2 | -014 | 0.242 | 0.032 | 75 |
| BELDEN | 1505A | COAX | -2 | -025 | 0.234 | 0.032 | 75 |
| BELDEN | 1505F | COAX | -2 | – | 0.242 | 0.034 | 75 |
| BELDEN | 1520A | COAX | -5 | -004 | 0.102 | 0.012 | 75 |
| BELDEN | 1521A | COAX | – | -004 | 0.560 | 0.012 | 75 |
| BELDEN | 1522A | COAX | -36 | -004 | 0.107 | 0.012 | 75 |
| BELDEN | 1523A | COAX | -6A | -053 | 0.400 | 0.064 | 75 |
| BELDEN | 1525A | COAX | -6A | TOO LARGE | 0.404 | 0.064 | 75 |
| BELDEN | 1530A | COAX | -41 | -020 | 0.270 | 0.040 | 75 |
| BELDEN | 1547A | COAX | -41 | -020 | 0.275 | 0.040 | 75 |
| BELDEN | 1617A | COAX | -6B | TOO LARGE | 0.407 | 0.064 | 75 |
| BELDEN | 1671A | COAX | -86 | -003 | 0.087 | 0.020 | 50 |
| BELDEN | 1671J | COAX | -31 | – | 0.127 | 0.020 | 50 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

Cable Group Table

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------|------------|--------------|-------------|-------------|-----------|-----------|
| BELDEN | 1672A | COAX | -86 | -004 | 0.087 | 0.011 | 75 |
| BELDEN | 1672J | COAX | -31 | -027 | 0.127 | 0.011 | 75 |
| BELDEN | 1694A | COAX | -41 | -020 | 0.282 | 0.040 | 75 |
| BELDEN | 1696A | TWINAX | * | -215 | 0.240 | 0.031 | 110 |
| BELDEN | 1800A | TWINAX | * | -212 | 0.184 | 0.024 | 110 |
| BELDEN | 1800B | TWINAX | * | -212 | 0.180 | 0.024 | 110 |
| BELDEN | 1800F | TWINAX | -30 | _ | 0.216 | 0.024 | 110 |
| BELDEN | 1807A | COAX | -5 | -004 | 0.110 | 0.012 | 75 |
| BELDEN | 1808A | COAX | -5 | -004 | 0.110 | 0.012 | 75 |
| BELDEN | 1809A | COAX | -63 | -025 | 0.234 | 0.032 | 75 |
| BELDEN | 1829A | COAX | -41 | -020 | 0.270 | 0.040 | 75 |
| BELDEN | 1865A | COAX | -22 | -09 | 0.152 | 0.020 | 75 |
| BELDEN | 1880A | TWINAX | * | -212 | 0.184 | 0.024 | _ |
| BELDEN | 3092A | COAX | -51 | * | 0.298 | 0.040 | 75 |
| BELDEN | 4-27046-3265 | TWINAX | * | _ | 0.200 | 0.023 | _ |
| BELDEN | 5339b5 | COAX | _ | -020 | 0.266 | 0.040 | 75 |
| BELDEN | 5339Q5 | COAX | _ | -016 | 0.298 | 0.040 | 75 |
| BELDEN | 5399B5 | COAX | _ | -020 | 0.270 | 0.040 | 75 |
| BELDEN | 5539Y5 | COAX | _ | -022 | 0.232 | 0.025 | 93 |
| BELDEN | 6139B8 | COAX | _ | -052 | 0.348 | 0.064 | 75 |
| BELDEN | 6339Q8 | COAX | _ | -024 | 0.248 | 0.040 | 75 |
| BELDEN | 6439Q8 | COAX | _ | -023 | 0.230 | 0.032 | 75 |
| BELDEN | 734D() | COAX | _ | -025 | _ | _ | 75 |
| BELDEN | 734D()T | COAX | _ | -025 | _ | _ | 75 |
| BELDEN | 734D1 | COAX | _ | -025 | 0.235 | 0.032 | 75 |
| BELDEN | 735A() | COAX | * | -026 | _ | _ | 75 |
| BELDEN | 735A()T | COAX | * | -026 | _ | _ | 75 |
| BELDEN | 735A1 | COAX | * | -026 | 0.129 | 0.016 | 75 |
| BELDEN | 7700A | COAX | -5 | -004 | 0.107 | 0.012 | 75 |
| BELDEN | 7710A | COAX | -41 | -020 | 0.275 | 0.040 | 75 |
| BELDEN | 7713A | COAX | -41 | -020 | 0.275 | 0.040 | 75 |
| BELDEN | 7731A | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| BELDEN | 7788A | COAX | -4 | -009 | 0.159 | 0.023 | 75 |
| BELDEN | 7794A | COAX | | -023 | 0.235 | 0.032 | 75 |
| BELDEN | 7805A | COAX | -5 | -003 | 0.105 | 0.018 | 50 |
| BELDEN | 7806A | COAX | -1 | -011 | 0.195 | 0.037 | 50 |
| BELDEN | 7807A | COAX | -1 | _ | 0.195 | 0.044 | 50 |
| BELDEN | 8232A | TRIAx | -13A | TOO LARGE | 0.315 | 0.032 | 75 |
| BELDEN | 8233A | TRIAx | -14 | _ | 0.475 | 0.048 | 75 |
| BELDEN | 8241A | COAX | -2 | -013 | 0.242 | 0.025 | 75 |
| BELDEN | 8241B | COAX | -2 | -013 | 0.242 | 0.023 | 75 |
| BELDEN | 8241F | COAX | -2 | -013A | 0.242 | 0.030 | 75 |
| BELDEN | 8281B | COAX | -6 | -016 | 0.307 | 0.030 | 75 |
| BELDEN | 8281F | COAX | -51 | -016 | 0.300 | 0.033 | 75 |
| BELDEN | 9062A | COAX | -2 | -013 | 0.242 | 0.025 | 93 |
| BELDEN | 9269_ | COAX | -2 | -013 | 0.242 | 0.025 | 93 |
| BELDEN | 97300 2802 | TWINAX | * | -050 | 0.94 | 0.012 | _ |
| BELDEN | 9913F | COAX | * | -050 | 0.408 | 0.108 | 50 |
| BELDEN | M9100 | COAX | -2 | -014 | 0.240 | 0.032 | _ |
| BELDEN | M9815 | TWINAX | -8 | _ | _ | _ | _ |
| BELDEN | PD7163 | COAX | | -004 | 0.100 | 0.010 | 75 |
| BELDEN | SS895 | COAX | -36 | -027 | 0.123 | 0.016 | 75 |
| BELDEN | YM23969 | COAX | -34 | * | 0.244 | 0.033 | _ |
| BELDEN | YQ10474 | TWINAX | -25 | _ | 0.268 | 0.032 | _ |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------------|------------|--------------|----------------|-------------|-----------|-----------|
| BELDEN | YQ28763 | TWINAX | -55 | _ | 0.200 | _ | _ |
| BELDEN | YQ40343 | COAX | -5 | -004 | 0.95 | 0.012 | 75 |
| BELDEN | YQ41416 | TRIAx | -10 | TOO LARGE | 0.410 | 0.063 | 75 |
| BELDEN | YQ44343 | COAX | _ | -009 | 0.142 | 0.019 | 75 |
| BELDEN | YR-14910 | TWINAX | -29 | -202 | 0.150 | 0.024 | 78 |
| BELDEN | YR-15161 | TWINAX | -29 | _ | _ | _ | _ |
| BELDEN | YR16411 | TWINAX | -9 | _ | 0.247 | 0.023 | _ |
| BELDEN | YR-19218 | TWINAX | -29 | -203 | 0.150 | 0.012 | 124 |
| BELDEN | YR23023 | COAX | * | -009 | 0.160 | 0.020 | 75 |
| BELDEN | YR23930 | COAX | -2 | -014 | 0.242 | 0.032 | 75 |
| BELDEN | YR27110 | COAX | -22 | -009 | 0.162 | 0.021 | 75 |
| BELDEN | YR27543 | TWINAX | -27 | * | 0.117 | 0.012 | _ |
| BELDEN | YR28296 | TWINAX | _ | -203 | 0.162 | 0.012 | _ |
| BELDEN | YR28314 | COAX | * | -009 | 0.162 | 0.019 | 75 |
| BELDEN | YR28365 | COAX | -2 | -013 | 0.245 | 0.025 | 100 |
| BELDEN | YR39667 | COAX | -22 | -009 | 0.152 | 0.020 | 75 |
| BELDEN | YR40974 | COAX | -36 | -007 | 0.113 | 0.012 | 75 |
| BELDEN | YR41007 | COAX | -63 | -025 | 0.235 | 0.032 | 75 |
| BELDEN | YR41039 | COAX | -22 | -009 | 0.155 | 0.020 | 75 |
| BELDEN | YR41679 | COAX | _ | -014 | 0.242 | 0.032 | 75 |
| BELDEN | YR45056 | COAX | * | -026 | 0.131 | 0.017 | 75 |
| BELDEN | YR45301 | COAX | * | -026 | 0.131 | 0.017 | 75 |
| BELDEN | YR46359 | COAX | _ | -023 | 0.235 | 0.034 | 75 |
| BELDEN | YR46400 | COAX | -2A | -014 | 0.242 | 0.033 | 75 |
| BELDEN | YR46844 | COAX | _ | -009 | 0.155 | 0.020 | 75 |
| BRAND REX | T-14670 | TWINAX | * | -215 | 0.237 | 0.030 | _ |
| BRAND REX | T18-11222-24-2/G-0 | TWINAX | -27 | -223 | 0.112 | 0.023 | _ |
| BRAND-REX | A-779 | COAX | -5 | -004 | 0.090 | 0.010 | _ |
| BRAND-REX | B-749 | COAX | -44 | 105-1940 (220) | 0.080 | 0.012 | _ |
| BRAND-REX | M17/183-00001 | COAX | -1 | -011 | 0.195 | 0.035 | 50 |
| BRAND-REX | T- 378 | COAX | -6 | -016 | 0.312 | 0.031 | _ |
| BRAND-REX | T-10971 | TWINAX | -24 | -221 | 0.161 | 0.024 | _ |
| BRAND-REX | T-14018 | TRIAx | -25A | _ | 0.250 | 0.030 | _ |
| BRAND-REX | T-2948 | TRIAx | -26 | _ | 0.165 | 0.012 | _ |
| BRAND-REX | T-385 | COAX | -44 | * | 0.80 | 0.012 | _ |
| CANFORD | PSF 1/3 | COAX | -2B | -015 | 0.250 | 0.024 | 75 |
| COMMSCOPE | 5905 | COAX | -6A | -051 | 0.405 | 0.048 | 75 |
| COMMSCOPE | 222 | COAX | -4 | -009 | 0.155 | 0.024 | 75 |
| COMMSCOPE | 232 | COAX | -4 | -009 | 0.155 | 0.024 | 75 |
| COMMSCOPE | 242 | COAX | -6A | | 0.415 | 0.064 | 75 |
| COMMSCOPE | 322 | COAX | * | -009 | 0.160 | 0.020 | _ |
| COMMSCOPE | 332 | COAX | -4 | -009 | 0.155 | 0.024 | 75 |
| COMMSCOPE | 356 | COAX | -6A | _ | 0.415 | 0.064 | 75 |
| COMMSCOPE | 357 | COAX | | -024 | 0.260 | 0.040 | 75 |
| COMMSCOPE | 358 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 401 | COAX | -22 | -009 | 0.155 | 0.020 | 75 |
| COMMSCOPE | 2035 | COAX | * | -026 | 0.127 | 0.016 | 75 |
| COMMSCOPE | 3104 | COAX | -1 | -011 | 0.188 | 0.037 | 50 |
| COMMSCOPE | 3130 | COAX | -1 | -021 | 0.201 | 0.032 | 50 |
| COMMSCOPE | 3135 | COAX | -1 | -021 | 0.199 | 0.035 | 50 |
| COMMSCOPE | 3136 | COAX | -1 | -011 | 0.199 | 0.037 | 50 |
| COMMSCOPE | 3139 | COAX | -1 | -021 | 0.202 | 0.031 | 50 |
| COMMSCOPE | 3140 | COAX | -1 | -021 | 0.195 | 0.033 | 50 |
| COMMSCOPE | 3141 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

Cable Group Table

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------|------------|--------------|-------------|-------------|-----------|-----------|
| COMMSCOPE | 3222 | COAX | * | TOO LARGE | 0.412 | 0.106 | 50 |
| COMMSCOPE | 3226 | COAX | * | TOO LARGE | 0.412 | 0.106 | 50 |
| COMMSCOPE | 3246 | COAX | -6B | _ | 0.418 | 0.086 | 50 |
| COMMSCOPE | 3247 | COAX | -6B | _ | 0.418 | 0.086 | 50 |
| COMMSCOPE | 3249 | COAX | -6B | _ | 0.413 | 0.086 | 50 |
| COMMSCOPE | 3250 | COAX | -48 | TOO LARGE | 0.413 | 0.086 | 50 |
| COMMSCOPE | 5060 | COAX | -6 | * | 0.308 | 0.040 | 75 |
| COMMSCOPE | 5061 | COAX | -41 | * | 0.264 | 0.040 | 75 |
| COMMSCOPE | 5065 | COAX | _ | -009 | 0.160 | 0.020 | 92 |
| COMMSCOPE | 5535 | COAX | * | -026 | 0.128 | 0.017 | 75 |
| COMMSCOPE | 5550 | COAX | -2 | -013 | 0.242 | 0.025 | 75 |
| COMMSCOPE | 5551 | COAX | -2 | -015 | 0.250 | 0.025 | 75 |
| COMMSCOPE | 5553 | COAX | -2 | -014 | 0.250 | 0.032 | 75 |
| COMMSCOPE | 5554 | COAX | -2 | -014 | 0.250 | 0.032 | 75 |
| COMMSCOPE | 5555 | COAX | -2 | -015 | 0.250 | 0.025 | 80 |
| COMMSCOPE | 5559 | COAX | -2 | -013 | 0.242 | 0.025 | 75 |
| COMMSCOPE | 5560 | COAX | -2 | -015 | 0.250 | 0.025 | 73 |
| COMMSCOPE | 5563 | COAX | -2 | -013 | 0.250 | 0.023 | 75 |
| COMMSCOPE | 5565 | COAX | -2 | -014 | 0.242 | 0.032 | 75 |
| COMMSCOPE | 5567 | COAX | -2 | -014 | 0.250 | 0.032 | 75 |
| COMMSCOPE | 5569 | COAX | -2 | -014 | 0.250 | 0.032 | 75 |
| COMMSCOPE | 5571 | COAX | -2 | -014 | 0.248 | 0.032 | 75 |
| COMMSCOPE | 5572 | COAX | -2 | -014 | 0.248 | 0.032 | 75 |
| COMMSCOPE | 5573 | COAX | -2 | -014 | 0.246 | 0.032 | 75 |
| COMMSCOPE | 5574 | COAX | -2 | -014 | 0.248 | 0.032 | 75 |
| COMMSCOPE | 5575 | COAX | -2 | -014 | 0.246 | 0.032 | 75 |
| COMMSCOPE | 5585 | COAX | -2 | -014 | 0.242 | 0.032 | 75 |
| COMMSCOPE | 5586 | COAX | -2 | -014 | 0.247 | 0.032 | 75 |
| COMMSCOPE | 5589 | COAX | -2A | -022 | 0.235 | 0.025 | 75 |
| COMMSCOPE | 5700 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5701 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5702 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5714 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5715 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5720 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5721 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 5723 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 5725 | COAX | -41 | -020 | 0.276 | 0.040 | 75 |
| COMMSCOPE | 5727 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5728 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5729 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5730 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5731 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 5737 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5738 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 5740 | COAX | -6 | * | 0.308 | 0.040 | 75 |
| COMMSCOPE | 5742 | COAX | -6 | * | 0.308 | 0.040 | 75 |
| COMMSCOPE | 5750 | COAX | -6 | * | 0.308 | 0.040 | 75 |
| COMMSCOPE | 5765 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5781 | COAX | -6 | * | 0.306 | 0.040 | 75 |
| COMMSCOPE | 5782 | COAX | -6 | * | 0.308 | 0.040 | 75 |
| COMMSCOPE | 5786 | COAX | -41 | -020 | 0.280 | 0.040 | 75 |
| COMMSCOPE | 5787 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 5788 | COAX | -41 | -020 | 0.280 | 0.40 | 75 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------|------------|--------------|-------------|-------------|-----------|-----------|
| COMMSCOPE | 5789 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 5790 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 5901 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5902 | COAX | -6A | _ | 0.415 | 0.064 | 75 |
| COMMSCOPE | 5903 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5904 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5906 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5908 | COAX | -6A | -051 | 0.405 | 0.048 | 75 |
| COMMSCOPE | 5909 | COAX | -6A | -051 | 0.405 | 0.048 | 75 |
| COMMSCOPE | 5910 | COAX | -6A | -052 | 0.395 | 0.064 | 75 |
| COMMSCOPE | 5912 | COAX | -6A | -052 | 0.395 | 0.064 | 75 |
| COMMSCOPE | 5913 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5914 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5914 | COAX | -6A | _ | 0.415 | 0.064 | 75 |
| COMMSCOPE | 5915 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5916 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5917 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5918 | COAX | -6A | _ | 0.412 | 0.064 | 75 |
| COMMSCOPE | 5920 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5920 | COAX | -6A | _ | 0.415 | 0.064 | 75 |
| COMMSCOPE | 5940 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5950 | COAX | -6A | -053 | 0.415 | 0.064 | 75 |
| COMMSCOPE | 5950 | COAX | -6A | -053 | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5951 | COAX | -6A | _ | 0.405 | 0.064 | 75 |
| COMMSCOPE | 5952 | COAX | -6A | _ | 0.415 | 0.064 | 75 |
| COMMSCOPE | 5953 | COAX | -6A | _ | 0.415 | 0.064 | 75 |
| COMMSCOPE | 6200 | COAX | -2 | -015 | 0.242 | 0.025 | 92 |
| COMMSCOPE | 6201 | COAX | -2 | -013 | 0.242 | 0.025 | 93 |
| COMMSCOPE | 6205 | COAX | * | -018 | 0.260 | 0.025 | 93 |
| COMMSCOPE | 6605 | COAX | * | -018 | 0.267 | 0.025 | 93 |
| COMMSCOPE | 6608 | COAX | -2 | -015A | 0.249 | 0.025 | 93 |
| COMMSCOPE | 6609 | COAX | -2 | -015A | 0.249 | 0.025 | 93 |
| COMMSCOPE | 6611 | COAX | -2 | -015A | 0.242 | 0.025 | 93 |
| COMMSCOPE | 6612 | COAX | -2 | -015A | 0.242 | 0.025 | 93 |
| COMMSCOPE | 6615 | COAX | -2 | -015A | 0.249 | 0.025 | 93 |
| COMMSCOPE | 7500 | COAX | -6 | -016 | 0.304 | 0.032 | 75 |
| COMMSCOPE | 7501 | COAX | -6 | -016 | 0.304 | 0.032 | 75 |
| COMMSCOPE | 7503 | COAX | -6 | -016 | 0.304 | 0.032 | 75 |
| COMMSCOPE | 7505 | COAX | -6 | -016 | 0.305 | 0.032 | 75 |
| COMMSCOPE | 7506 | COAX | -6 | -016 | 0.304 | 0.033 | 75 |
| COMMSCOPE | 7510 | COAX | -6 | -016 | 0.304 | 0.031 | 75 |
| COMMSCOPE | 7530 | COAX | _ | -054 | 0.318 | 0.051 | 75 |
| COMMSCOPE | 7536 | COAX | -4 | -009 | 0.150 | 0.023 | 75 |
| COMMSCOPE | 7537 | COAX | -4 | -009 | 0.154 | 0.023 | 75 |
| COMMSCOPE | 7538 | COAX | -37 | -009 | 0.159 | 0.022 | 75 |
| COMMSCOPE | 7551 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 7573 | COAX | -2A | -022 | 0.220 | 0.027 | 75 |
| COMMSCOPE | 7713 | COAX | -6A | _ | 0.413 | 0.086 | 50 |
| COMMSCOPE | 7714 | COAX | -6B | TOO LARGE | 0.425 | 0.089 | 75 |
| COMMSCOPE | 7714 | COAX | -6B | _ | 0.432 | 0.088 | 50 |
| COMMSCOPE | 7715 | COAX | -6B | _ | 0.432 | 0.088 | 50 |
| COMMSCOPE | 7723 | COAX | -3 | -012 | 0.212 | 0.036 | 50 |
| COMMSCOPE | 7725 | COAX | * | -023 | 0.220 | 0.036 | 50 |
| COMMSCOPE | 7726 | COAX | -3 | -012 | 0.220 | 0.036 | 50 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

Cable Group Table

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------|------------|--------------|-------------|-------------|-----------|-----------|
| COMMSCOPE | 7810 | TRIAx | * | TOO LARGE | 0.325 | 0.032 | 75 |
| COMMSCOPE | 9012 | TWINAX | -9 | _ | 0.241 | 0.037 | 78 |
| COMMSCOPE | 57603 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 57604 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 57605 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 72001 | COAX | -22 | -009 | 0.155 | 0.020 | 75 |
| COMMSCOPE | 72012 | COAX | -22 | -009 | 0.155 | 0.020 | 75 |
| COMMSCOPE | 72312 | COAX | * | -026 | 0.127 | 0.016 | 75 |
| COMMSCOPE | 73501 | COAX | * | -026 | 0.130 | 0.016 | 75 |
| COMMSCOPE | 73502 | COAX | * | -026 | 0.130 | 0.016 | 75 |
| COMMSCOPE | 73503 | COAX | * | -026 | 0.130 | 0.016 | 75 |
| COMMSCOPE | 73506 | COAX | * | -026 | 0.127 | 0.016 | 75 |
| COMMSCOPE | 73508 | COAX | * | -026 | 0.127 | 0.016 | 75 |
| COMMSCOPE | 73509 | COAX | * | -026 | 0.127 | 0.016 | 75 |
| COMMSCOPE | 73512 | COAX | * | -026 | 0.126 | 0.015 | 75 |
| COMMSCOPE | 75603 | COAX | _ | -009 | 0.150 | 0.022 | 75 |
| COMMSCOPE | 75604 | COAX | _ | -009 | 0.150 | 0.022 | 75 |
| COMMSCOPE | 556510 | COAX | -2 | -014 | 0.242 | 0.032 | 75 |
| COMMSCOPE | 576503 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 576504 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 576505 | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | 753603 | COAX | -4 | -009 | 0.150 | 0.022 | 75 |
| COMMSCOPE | 753604 | COAX | -4 | -009 | 0.150 | 0.022 | 75 |
| COMMSCOPE | 753605 | COAX | -4 | -009 | 0.150 | 0.022 | 75 |
| COMMSCOPE | 0132K | COAX | * | -024 | 0.242 | 0.040 | 75 |
| COMMSCOPE | 0132V | COAX | * | -024 | 0.242 | 0.040 | 75 |
| COMMSCOPE | 0219K | COAX | -1 | -012 | 0.200 | 0.036 | 50 |
| COMMSCOPE | 0247K | COAX | -41 | -020 | 0.268 | 0.040 | 75 |
| COMMSCOPE | 0247V | COAX | -41 | -020 | 0.268 | 0.040 | 75 |
| COMMSCOPE | 0359K | COAX | * | -024 | 0.241 | 0.041 | 75 |
| COMMSCOPE | 0359K | COAX | * | -024 | 0.241 | 0.041 | 75 |
| COMMSCOPE | 2022K | COAX | -2 | -023 | 0.239 | 0.032 | 75 |
| COMMSCOPE | 2022V | COAX | -2 | -23 | 0.239 | 0.032 | 75 |
| COMMSCOPE | 2068K | COAX | -63 | -025 | 0.219 | 0.032 | _ |
| COMMSCOPE | 2100K | COAX | -21 | * | 0.169 | 0.032 | 50 |
| COMMSCOPE | 2100V | COAX | -21 | * | 0.169 | 0.032 | 53 |
| COMMSCOPE | 2125K | COAX | -1 | -012 | 0.200 | 0.036 | 50 |
| COMMSCOPE | 2227K | COAX | -41 | -020 | 0.264 | 0.040 | 75 |
| COMMSCOPE | 2227V | COAX | -41 | * | 0.264 | 0.040 | 75 |
| COMMSCOPE | 2229V | COAX | -41 | -020 | 0.268 | 0.040 | 75 |
| COMMSCOPE | 2274V | COAX | * | -024 | 0.241 | 0.040 | 75 |
| COMMSCOPE | 2275K | COAX | * | -024 | 0.241 | 0.040 | 75 |
| COMMSCOPE | 2275V | COAX | * | -024 | 0.241 | 0.040 | 75 |
| COMMSCOPE | 2276V | COAX | * | -024 | 0.241 | 0.040 | 75 |
| COMMSCOPE | 2278K | COAX | * | -024 | 0.242 | 0.040 | 75 |
| COMMSCOPE | 2291K | TWINAX | -25 | _ | 0.260 | 0.039 | 100 |
| COMMSCOPE | 2525K | COAX | * | -016 | 0.290 | 0.031 | 75 |
| COMMSCOPE | 2527K | COAX | -41 | * | 0.279 | 0.032 | 75 |
| COMMSCOPE | 425-0256 | COAX | _ | -025 | 0.240 | 0.033 | 75 |
| COMMSCOPE | 5060F | COAX | -6 | * | 0.308 | 0.040 | 75 |
| COMMSCOPE | 5060R | COAX | -6 | * | 0.308 | 0.040 | 75 |
| COMMSCOPE | 5550M | COAX | -2 | -013A | 0.242 | 0.030 | 75 |
| COMMSCOPE | 5568M | COAX | * | -025 | 0.240 | 0.033 | _ |
| COMMSCOPE | 5726R | COAX | -41 | -020 | 0.276 | 0.041 | 75 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|---------------------|--------------------|------------|--------------|-------------|-------------|-----------|-----------|
| COMMSCOPE | 5740F | COAX | -6 | * | 0.308 | 0.038 | 75 |
| COMMSCOPE | 5740H1 | COAX | -6 | * | 0.308 | 0.040 | 75 |
| COMMSCOPE | 5740R | COAX | -6 | * | 0.308 | 0.040 | 75 |
| COMMSCOPE | 5913R | COAX | -6A | _ | 0.415 | 0.064 | 75 |
| COMMSCOPE | 5916R | COAX | -6A | TOO LARGE | 0.415 | 0.064 | 75 |
| COMMSCOPE | 720T1 | COAX | -22 | -009 | 0.155 | 0.020 | 75 |
| COMMSCOPE | 720T2 | COAX | -22 | -009 | 0.155 | 0.020 | 75 |
| COMMSCOPE | 734C() | COAX | -63 | -025 | 0.236 | 0.032 | 75 |
| COMMSCOPE | 734C1H | COAX | -63 | -025 | 0.236 | 0.032 | 75 |
| COMMSCOPE | 734C1P | COAX | -63 | * | 0.219 | 0.032 | 75 |
| COMMSCOPE | 7345() | COAX | -63 | -025 | 0.236 | 0.032 | 75 |
| COMMSCOPE | 73451H | COAX | -63 | -025 | 0.236 | 0.032 | 75 |
| COMMSCOPE | 7345T | COAX | -63 | -025 | 0.236 | 0.032 | 75 |
| COMMSCOPE | 7345TH | COAX | -63 | -025 | 0.236 | 0.032 | 75 |
| COMMSCOPE | 735(#) | COAX | * | -026 | 0.130 | 0.016 | 75 |
| COMMSCOPE | 735(JH) | COAX | * | -026 | 0.129 | 0.016 | 75 |
| COMMSCOPE | 735(JP) | COAX | * | -026 | 0.127 | 0.016 | 75 |
| COMMSCOPE | 73501B | COAX | _ | -026 | 0.137 | 0.016 | 75 |
| COMMSCOPE | 73501H | COAX | * | -026 | 0.127 | 0.016 | 75 |
| COMMSCOPE | 73502H | COAX | * | -026 | 0.127 | 0.016 | 75 |
| COMMSCOPE | 735T(JH) | COAX | * | -026 | 0.129 | 0.016 | 75 |
| COMMSCOPE | 735T2 | COAX | * | -026 | 0.126 | 0.016 | 75 |
| COMMSCOPE | F1160BV | COAX | -6A | * | 0.395 | 0.064 | 75 |
| COMMSCOPE | F1160BVV | COAX | -6A | * | 0.395 | 0.064 | 75 |
| COMMSCOPE | F11SSEF | COAX | -6A | _ | 0.405 | 0.064 | 75 |
| COMMSCOPE | F11SSVV | COAX | -6A | TOO LARGE | 0.395 | 0.064 | _ |
| COMMSCOPE | F5967BVM | COAX | -2 | -014 | 0.240 | 0.032 | 75 |
| COMMSCOPE | F5967BVV | COAX | -2 | -014 | 0.240 | 0.032 | 75 |
| COMMSCOPE | F660BVV | COAX | -41 | -020 | 0.272 | 0.040 | 75 |
| COMMSCOPE | F65SEF | COAX | -6 | * | 0.300 | 0.040 | 75 |
| COMMSCOPE | F65SVM-APDI-22-APD | COAX | _ | -020 | 0.281 | 0.040 | 75 |
| COMMSCOPE | OP73801DB | COAX | -6 | * | 0.290 | 0.040 | 75 |
| COMMSCOPE | VDM230 | COAX | _ | -009 | 0.171 | 0.023 | 75 |
| COMMSCOPE | WBC-300(R) | COAX | -6 | * | 0.070 | 0.070 | 50 |
| COMMSCOPE | 5726 | COAX | -41 | -020 | 0.272 | 0.040 | 74 |
| COMPOSITE VIDEO | VA-2/J2 | COAX | _ | -009 | _ | _ | 75 |
| COMPREHENSIVE VIDEO | CVC-59STXF | COAX | -2 | -023 | 0.236 | 0.031 | 75 |
| CONSOLIDATED | 4459 | COAX | -5 | -003 | 0.105 | 0.019 | 50 |
| CONSOLIDATED | 4462 | TRIAx | * | _ | 0.485 | 0.091 | 50 |
| DRAKA | 0.6/3.7 | COAX | _ | -022 | 0.237 | 0.024 | 75 |
| DRAKA | IMAGE720 | COAX | _ | -019 | 0.232 | 0.031 | 75 |
| DRAKA-HELEX | 32448A | COAX | _ | -030 | _ | _ | 75 |
| DRAKE | IMAGE1000 | COAX | _ | -020 | 0.268 | 0.039 | 75 |
| ESSEX | 1000 | COAX | -6A | _ | 0.405 | 0.085 | _ |
| ESSEX | 21-004 | COAX | -6A | _ | 0.405 | 0.085 | _ |
| ESSEX | 21-025 | COAX | -2 | _ | 0.242 | 0.025 | _ |
| ESSEX | 21-204 | TRIAx | -42 | _ | 0.285 | 0.036 | _ |
| ESSEX | 21-529 | TRIAx | -14 | _ | 0.460 | 0.049 | _ |
| ESSEX | 21-537 | COAX | -1 | -011 | 0.195 | 0.036 | _ |
| ESSEX | 21-541 | COAX | -2 | -013 | 0.242 | 0.025 | _ |
| ESSEX | 21-583 | TRIAx | -15 | TOO LARGE | 0.490 | 0.085 | 53 |
| ESSEX | 21-597 | COAX | -22 | -009 | 0.150 | 0.017 | _ |
| ESSEX | 21-780 | COAX | -6B | _ | 0.420 | 0.087 | _ |
| ESSEX | 21-795 | COAX | -2 | _ | 0.242 | 0.023 | _ |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

Cable Group Table

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------|------------|--------------|-------------|-------------|-----------|-----------|
| ESSEX | 421-098 | COAX | -22 | -008 | 0.145 | 0.012 | _ |
| ESSEX | 421-111 | COAX | -22 | -008 | 0.155 | 0.012 | _ |
| ESSEX | 421-176 | COAX | -1 | _ | 0.195 | 0.039 | _ |
| ESSEX | 621-100 | COAX | -6A | _ | 0.405 | 0.064 | _ |
| ESSEX | 621-106 | TRIAX | -7 | _ | 0.242 | 0.025 | _ |
| ESSEX | 621-243 | COAX | -41 | _ | 0.270 | 0.040 | _ |
| ESSEX | 621-284 | COAX | -41 | _ | 0.270 | 0.040 | _ |
| ESSEX | 621-715 | COAX | -1 | * | 0.195 | 0.025 | _ |
| FILOTEX | 63247 | TWINAX | _ | -212 | 0.179 | 0.025 | _ |
| FILOTEX | 96770 | TWINAX | -47 | _ | 0.142 | 0.024 | _ |
| FILOTEX | 374693 | COAX | -22 | -009 | 0.149 | 0.020 | _ |
| FILOTEX | ET39110ED2 | TRIAX | -15 | TOO LARGE | 0.490 | 0.064 | _ |
| FILOTEX | L910/39 | COAX | -22 | -009 | 0.155 | 0.020 | _ |
| FILOTEX | L910-42 | COAX | -22 | -009 | 0.155 | 0.020 | _ |
| FILOTEX | SP714 | TRIAX | -23 | _ | 0.138 | 0.012 | 75 |
| GEPCO | 7174 | COAX | -5 | -003 | 0.101 | 0.019 | 50 |
| GEPCO | 7537 | COAX | -4 | -009 | 0.160 | 0.023 | 75 |
| GEPCO | 7538 | COAX | -37 | -009 | 0.159 | 0.023 | 75 |
| GEPCO | LVT61811 | TRIAX | -15 | TOO LARGE | 0.516 | 0.068 | 75 |
| GEPCO | RGB6000 | COAX | -6 | -016 | 0.304 | 0.032 | 75 |
| GEPCO | RGB809 | COAX | -22 | -009 | 0.150 | 0.021 | 75 |
| GEPCO | RGB5809 | COAX | -22 | -009 | 0.150 | 0.021 | 75 |
| GEPCO | RGBSC809 | COAX | -22 | -009 | 0.150 | 0.021 | 75 |
| GEPCO | V61859M | COAX | -2 | _ | 0.242 | 0.030 | 75 |
| GEPCO | V618J59 | COAX | -2 | -013 | 0.242 | 0.023 | 75 |
| GEPCO | V618M59 | COAX | -2 | -013 | 0.242 | 0.023 | 75 |
| GEPCO | VDFM809 | COAX | -22 | -009 | 0.150 | 0.021 | 75 |
| GEPCO | VE61859 | COAX | -2 | -013A | 0.242 | 0.030 | 75 |
| GEPCO | VE61859M | COAX | -2 | -013A | 0.242 | 0.030 | 75 |
| GEPCO | VFM809 | COAX | -22 | -009 | 0.150 | 0.022 | 75 |
| GEPCO | VP6000 | COAX | -6 | -016 | 0.304 | 0.032 | 75 |
| GEPCO | VP618PE/AP | COAX | -6 | -016 | 0.304 | 0.032 | 75 |
| GEPCO | VP618PE01 | COAX | -6 | -016 | 0.304 | 0.031 | 75 |
| GEPCO | VP618PVC | COAX | -6 | -016 | 0.304 | 0.032 | 75 |
| GEPCO | VP618TK | COAX | -41 | * | 0.276 | 0.032 | 75 |
| GEPCO | VPM1000 | COAX | -2 | -013 | 0.242 | 0.023 | 75 |
| GEPCO | VPM2000 | COAX | -2 | -014 | 0.242 | 0.032 | 75 |
| GEPCO | VPM618 | COAX | -2A | -022 | 0.220 | 0.027 | 75 |
| GEPCO | VS102000 | COAX | -2 | -014 | 0.243 | 0.032 | 75 |
| GEPCO | VSD2001 | COAX | -41 | -020 | 0.273 | 0.040 | 75 |
| GEPCO | VSM618 | COAX | -22 | -009 | 0.150 | 0.017 | 75 |
| GEPCO | VT61811 | TRIAX | -14 | TOO LARGE | 0.474 | 0.065 | 75 |
| GORE | 03352/CX | TRIAX | _ | -303 | 0.150 | 0.012 | _ |
| GORE | C06C032 | COAX | -5A | -001 | 0.075 | 0.019 | _ |
| GORE | CXA-8220 | TRIAX | -60 | -305 | 0.187 | 0.025 | _ |
| GORE | CXN-1352B | COAX | -44 | * | 0.078 | 0.016 | _ |
| GORE | CXN-1362 | COAX | -36 | _ | 0.101 | 0.031 | _ |
| GORE | CXN-1388 | COAX | -5 | -003 | 0.110 | 0.020 | _ |
| GORE | CXN-1456 | COAX | -44 | _ | 0.74 | 0.019 | _ |
| GORE | CXN-1722 | COAX | -86 | * | 0.086 | 0.012 | _ |
| GORE | CXN-1939 | COAX | -44 | * | 0.78 | 0.010 | 93 |
| GORE | CXN-2223 | TWINAX | -24 | _ | 0.141 | 0.025 | _ |
| GORE | CXN-2268 | TWINAX | _ | -204 | 0.135 | 0.025 | _ |
| GORE | CXN-2363 | TWINAX | _ | -221 | 0.166 | 0.025 | _ |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|---------------------|------------|--------------|-------------|-------------|-----------|-----------|
| GORE | CXN-2702 | TWINAX | _ | -221 | 0.166 | 0.025 | 100 |
| GORE | CXN-3101 | COAX | -5 | -004 | 0.93 | 0.012 | 75 |
| GORE | CXN-3162 | TWINAX | * | -223 | 0.112 | 0.021 | 100 |
| GORE | CXN-3194 | TWINAX | _ | -204 | 0.138 | 0.024 | 80 |
| GORE | CXN3268 | TRIAx | -27 (150) | _ | 0.100 | 0.012 | 50 |
| GORE | DXSN-1747 | COAX | -44 | -001 | 0.080 | 0.011 | _ |
| GORE | DXSN-1888 | TWINAX | _ | -203 | 0.148 | 0.015 | 150 |
| GORE | DXSN1892 | COAX | -36 | * | 0.103 | 0.018 | _ |
| GORE | GBL-075-024 | TWINAX | -29 | -204 | 0.132 | 0.025 | _ |
| GORE | GCX-075-26-REV A | COAX | -36 | * | 0.099 | 0.019 | _ |
| GORE | GSC 03-2236-00 | COAX | _ | -004 | 0.092 | 0.012 | 75 |
| GORE | GSC-01-81457-00 | TWINAX | -27 | -209 | 0.118 | 0.016 | 120 |
| GORE | GSC-05-80583-00 | TWINAX | _ | -202 | 0.145 | 0.021 | _ |
| GORE | GSC-12-1381-01 | TWINAX | -45 | _ | 0.160 | 0.024 | _ |
| GRUMMAN | GC875ACH1 | TWINAX | * | -224 | 0.190 | 0.024 | 98 |
| GRUMMAN | GC875GBI | TRIAx | -57 | -302 | 0.164 | 0.033 | _ |
| GRUMMAN | GC875GC1 | TRIAx | -56 | -301 | 0.164 | 0.012 | _ |
| GRUMMAN | GC875GP1 | COAX | -31 | -006 | 0.128 | 0.020 | _ |
| GRUMMAN | GC875LNI | TWINAX | 59 | _ | 0.167 | 0.020 | _ |
| GRUMMAN | GC875PD1 | COAX | -5A | _ | 0.063 | 0.012 | _ |
| GRUMMAN | GC875RM1 | TWINAX | -45 | -204 | 0.144 | 0.025 | _ |
| GRUMMAN | GC875RR1 | QUADRAX | -33 | -220 | 0.179 | 0.025 | _ |
| GRUMMAN | GC875TM24H | TRIAx | -58 | -221 | 0.160 | 0.025 | _ |
| GRUMMAN | GC875TMH | TWINAX | -45 | -204 | 0.146 | 0.025 | _ |
| H.P. | TXA114-P | TRIAx | * | * | 0.217 | 0.021 | _ |
| HEWLETT PACKARD | 8120-0049 | COAX | -4 | -008 | 0.155 | 0.010 | _ |
| HEWLETT PACKARD | 8120-0552-1 | COAX | -5B | * | 0.110 | 0.015 | 50 |
| HEWLETT PACKARD | 8120-0789 | COAX | -5B | _ | 0.110 | 0.015 | _ |
| HEWLETT PACKARD | 8120-1105 | COAX | -5B | -002 | 0.110 | 0.015 | _ |
| HEWLETT PACKARD | 8120-1289 | COAX | -2B | -015 | 0.255 | 0.025 | _ |
| HEWLETT PACKARD | 8120-4461 | COAX | -5 | -003 | 0.093 | 0.018 | 50 |
| HEWLETT PACKARD | 8120-9026 | COAX | -5B | _ | 0.110 | 0.015 | _ |
| HEWLETT PACKARD | A-8120-9077-1 | COAX | -5 | * | 0.110 | 0.015 | _ |
| HITACHI | HCM-39441/1 | COAX | * | -027 | 0.128 | 0.016 | 75 |
| HITACHI | HCM-9441/12 | COAX | * | -026 | 0.133 | 0.016 | 75 |
| HITEMP | 117P80660 | COAX | -50 | _ | 0.375 | 0.086 | _ |
| HITEMP | RD1152 | COAX | * | -026 | 0.132 | 0.016 | 75 |
| HITEMP | RD1152-2 | COAX | -22 | * | 0.143 | 0.016 | 75 |
| JUDD | 740 | COAX | _ | -004 | 0.080 | 0.010 | 75 |
| JUDD | 735501 | COAX | * | -026 | 0.134 | 0.018 | 75 |
| JUDD | C1401053 | COAX | -63 | -025 | 0.232 | 0.031 | 75 |
| JUDD | C1401064 | COAX | * | -026 | 0.132 | 0.016 | 75 |
| JUDD | C1401741 | COAX | _ | -004 | 0.099 | 0.010 | 75 |
| JUDD WIRE INC | SS502401 | COAX | -5 | -003 | _ | _ | _ |
| KEITHLEY | SC-22 | TRIAx | -23 | * | 0.145 | 0.024 | 40 |
| KEITHLEY | SC-9 | COAX | -1 | -021 | 0.195 | 0.035 | 50 |
| LUCENT | 407529262 | COAX | -5 | -004 | 0.106 | 0.010 | 75 |
| LUCENT | 848068607 | COAX | -37 | * | 0.166 | 0.016 | 75 |
| LUCENT | 106 309 206 (2734A) | COAX | _ | -025 | 0.225 | 0.031 | 75 |
| LUCENT | 1928 001A 1C/36 | COAX | * | -026 | 0.133 | 0.015 | 75 |
| LUCENT | 735C | COAX | * | -026 | 0.139 | 0.016 | 75 |
| LUCENT | KS23918 L2 | COAX | _ | -004 | 0.089 | 0.013 | 75 |
| LUCENT | WP91681 L2 | COAX | _ | -004 | 0.089 | 0.013 | 75 |
| M/A-COM | 2250-E82832 | COAX | -53 | -022 | _ | _ | _ |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

Cable Group Table

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|---------------|------------|--------------|-------------|-------------|-----------|-----------|
| MADISON | 022H22BZID | TWINAX | -9 | _ | 0.250 | 0.038 | 100 |
| MADISON | 12CFE00002 | COAX | _ | -009 | 0.158 | 0.020 | 75 |
| MADISON | 12EEK00001 | COAX | _ | -026 | 0.132 | 0.016 | 75 |
| MADISON CABLE CORP | 6096 | COAX | -21 | * | 0.158 | 0.037 | _ |
| MICRODOT | 202-3927-0000 | TWINAX | -27 | -208 | 0.110 | 0.011 | 117 |
| MICRODOT | 202-3934-0000 | TWINAX | -24 | -211 | 0.145 | 0.013 | 160 |
| MICRODOT | 202-3942-0000 | TWINAX | -27 | -209 | 0.207 | 0.025 | 110 |
| MICRODOT | 202-4547 | TWINAX | -24 | -211 | 0.098 | 0.020 | 160 |
| MICRODOT | 250-3833-0000 | TRIAx | * | -303 | 0.270 | 0.030 | _ |
| MICRODOT | 250-3834-0000 | COAX | -5A | -001 | 0.400 | 0.095 | 50 |
| MICRODOT | 250-3902-0000 | COAX | -5A | -001 | 0.141 | 0.036 | 50 |
| MICRODOT | 250-3908-0000 | COAX | -5A | -001 | 0.128 | 0.012 | 50 |
| MICRODOT | 250-3909-0000 | COAX | -44 | * | 0.087 | 0.021 | 50 |
| MICRODOT | 250-3920-0000 | COAX | -5A | -001 | 0.087 | 0.021 | 50 |
| MICRODOT | 250-3967-0000 | COAX | -5 | -003 | 0.087 | 0.021 | 50 |
| MICRODOT | 250-4021-0000 | COAX | -31 | * | 0.245 | 0.035 | 50 |
| MICRODOT | 250-4044-0000 | TRIAx | -43 | _ | 0.245 | 0.033 | 50 |
| MICRODOT | 250-4045-0000 | TRIAx | -43 | -302 | 0.500 | 0.089 | 50 |
| MICRODOT | 250-4070-0000 | TRIAx | -56 | -302 | 0.500 | 0.081 | 50 |
| MICRODOT | 250-4172-0000 | COAX | * | _ | 0.500 | 0.089 | 50 |
| MICRODOT | 250-4180-0000 | COAX | -5 | -003 | 0.500 | 0.081 | 50 |
| MICRODOT | 250-4804-0000 | TRIAx | -32 | -203 | 0.105 | 0.012 | 50 |
| MICRODOT | 250-4816-0009 | TRIAx | -27 | _ | 0.145 | 0.013 | 50 |
| MICRODOT | 275-3930-000 | TRIAx | _ | _ | 0.102 | 0.021 | 75 |
| MICRODOT | 275-3933-0000 | COAX | -4 | -009 | 0.120 | 0.021 | 75 |
| MICRODOT | 275-3991 | COAX | -36 | * | 0.200 | 0.038 | 75 |
| MICRODOT | 293-3902 | COAX | * | -026 | 0.160 | 0.031 | 93 |
| MICRODOT | 293-3922-0000 | TRIAx | -60 | -305 | 0.200 | 0.039 | 93 |
| MICRODOT | 293-3930-0000 | TRIAx | -43 | _ | 0.336 | 0.057 | 100 |
| MICRODOT | 293-3968-0000 | COAX | -22 | -008 | 0.412 | 0.090 | 93 |
| MICRODOT | 295-3801-0000 | COAX | -22 | -008 | 0.432 | 0.090 | 95 |
| MICRODOT | 295-3802-0000 | COAX | -22 | * | 0.432 | 0.090 | 95 |
| MICRODOT | 295-3950-0000 | TRIAx | -43 | _ | 0.216 | 0.036 | 95 |
| MICRODOT | 295-3952-0000 | TRIAx | -43 | _ | 0.075 | 0.013 | 95 |
| MICRODOT | 295-3992-000 | COAX | -36 | -007 | 0.288 | 0.060 | 95 |
| MICRODOT | 295-3993-0000 | TRIAx | -64 | -303 | 0.102 | 0.021 | 95 |
| MILESTEK | 30-01010 | COAX | -2 | -013 | 0.195 | 0.013 | 75 |
| MIL-SPEC | 2C2219EXJ | TWINAX | -47 | -206 | 0.336 | 0.029 | _ |
| MIL-SPEC | M17/015-RG022 | TWINAX | -10 | _ | 0.475 | 0.048 | 95 |
| MIL-SPEC | M17/094-RG179 | COAX | -5 | -004 | 0.105 | 0.013 | 75 |
| MIL-SPEC | M17/095-RG180 | COAX | -22 | -008 | 0.145 | 0.013 | 95 |
| MIL-SPEC | M17/113-RG316 | COAX | -5 | -003 | 0.098 | 0.020 | 50 |
| MIL-SPEC | M17/130-RG402 | COAX | -141 | | 0.141 | 0.036 | 50 |
| MIL-SPEC | M17/133-00002 | COAX | -86 | * | 0.087 | 0.021 | 50 |
| MIL-SPEC | M17/133-RG405 | COAX | -86 | * | 0.087 | 0.021 | 50 |
| MIL-SPEC | M17/134-00001 | TRIAx | -7 | -306 | 0.245 | 0.035 | 50 |
| MIL-SPEC | M17/134-00002 | TRIAx | -7 | -306 | 0.245 | 0.033 | 50 |
| MIL-SPEC | M17/135-00001 | TRIAx | -14A | TOO LARGE | 0.500 | 0.089 | 50 |
| MIL-SPEC | M17/135-00003 | TRIAx | -14A | _ | 0.500 | 0.081 | 50 |
| MIL-SPEC | M17/135-00004 | TRIAx | -14A | TOO LARGE | 0.500 | 0.089 | 50 |
| MIL-SPEC | M17/135-00005 | TRIAx | -14A | TOO LARGE | 0.500 | 0.081 | 50 |
| MIL-SPEC | M17/135-00006 | TRIAx | -14A | TOO LARGE | 0.500 | 0.081 | 50 |
| MIL-SPEC | M17/136-00001 | COAX | -5 | -004 | 0.105 | 0.012 | 75 |
| MIL-SPEC | M17/137-00001 | COAX | -22 | -008 | 0.145 | 0.013 | 95 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|-----------------|------------|--------------|-------------|-------------|-----------|-----------|
| MIL-SPEC | M17/138-00001 | COAX | -5 | -003 | 0.102 | 0.021 | 50 |
| MIL-SPEC | M17/152-00001 | COAX | -5 | -006 | 0.120 | 0.021 | 50 |
| MIL-SPEC | M17/155-00001 | COAX | -1 | -011 | 0.200 | 0.038 | 50 |
| MIL-SPEC | M17/157-00001 | COAX | -4 | -010 | 0.160 | 0.031 | 50 |
| MIL-SPEC | M17/158-00001 | COAX | -1 | -012 | 0.200 | 0.039 | 50 |
| MIL-SPEC | M17/162-00001 | COAX | -6E | _ | 0.336 | 0.057 | 50 |
| MIL-SPEC | M17/163-00001 | COAX | -6A | _ | 0.412 | 0.090 | 50 |
| MIL-SPEC | M17/164-00001 | COAX | -6B | _ | 0.432 | 0.090 | 50 |
| MIL-SPEC | M17/164-00002 | COAX | -6B | _ | 0.432 | 0.090 | 50 |
| MIL-SPEC | M17/167-00001 | COAX | -3 | -012 | 0.216 | 0.036 | 50 |
| MIL-SPEC | M17/169-00001 | COAX | -5A | -001 | 0.075 | 0.013 | 50 |
| MIL-SPEC | M17/170-00001 | COAX | -21 | -011 | 0.175 | 0.038 | 50 |
| MIL-SPEC | M17/171-00001 | COAX | -41 | _ | 0.288 | 0.060 | 50 |
| MIL-SPEC | M17/172-00001 | COAX | -5 | -003 | 0.102 | 0.021 | 50 |
| MIL-SPEC | M17/173-00001 | COAX | -5 | -003 | 0.100 | 0.019 | 50 |
| MIL-SPEC | M17/174-00001 | COAX | -6A | _ | 0.400 | 0.090 | 50 |
| MIL-SPEC | M17/175-00001 | COAX | -1 | -012 | 0.200 | 0.039 | 50 |
| MIL-SPEC | M17/176-00002 | TWINAX | -47 | -201 | 0.134 | 0.024 | 77 |
| MIL-SPEC | M17/177-00001 | TRIAX | -60 | -305 | 0.189 | 0.013 | 95 |
| MIL-SPEC | M17/179-00001 | TRIAX | * | -305 | 0.195 | 0.013 | 75 |
| MIL-SPEC | M17/180-00001 | COAX | -6E | -017 | 0.336 | 0.029 | 75 |
| MIL-SPEC | M17/181-00001 | COAX | -6A | _ | 0.412 | 0.050 | 75.E |
| MIL-SPEC | M17/184-00001 | COAX | -2 | -013 | 0.246 | 0.024 | 75 |
| MIL-SPEC | M17/186-00001 | TWINAX | -9 *** | -213 | 0.245 | 0.040 | 78 |
| MIL-SPEC | M17/187-00001 | COAX | -4 | * | 0.160 | 0.031 | 50 |
| MIL-SPEC | M17/189-00001 | COAX | -6A | _ | 0.412 | 0.090 | 50 |
| MIL-SPEC | M17/190-00001 | COAX | -6B | TOO LARGE | 0.432 | 0.089 | 50 |
| MIL-SPEC | M17/196-00001 | COAX | -5 | * | 0.115 | 0.019 | 50 |
| MIL-SPEC | M17/200-00001 | COAX | -3 | -012 | 0.216 | 0.036 | 50 |
| MIL-SPEC | M17/29-RG59 | COAX | -2 | -013 | 0.245 | 0.023 | 75 |
| MIL-SPEC | M17/2-RG6 | COAX | -6E | -017 | 0.336 | 0.029 | 75 |
| MIL-SPEC | M17/30-RG062 | COAX | -2B | -013 | 0.250 | 0.025 | 93 |
| MIL-SPEC | M17/31-RG63 | COAX | -6A | _ | 0.415 | 0.026 | 125 |
| MIL-SPEC | M17/45-RG108 | TWINAX | -9 | -213 | 0.235 | 0.038 | 78 |
| MIL-SPEC | M17/47-RG114 | COAX | -6A | _ | 0.415 | 0.08 | 185 |
| MIL-SPEC | M17/60-RG142 | COAX | -1 | -012 | 0.200 | 0.040 | 50 |
| MIL-SPEC | M17/62-RG144 | COAX | -6B | TOO LARGE | 0.412 | 0.0525 | 75 |
| MIL-SPEC | M17/6-RG11 | COAX | -6A | -053 | 0.412 | 0.050 | 75 |
| MIL-SPEC | M17/77-RG216 | COAX | -6B | _ | 0.432 | 0.050 | 75 |
| MIL-SPEC | M17/84-RG223 | COAX | -3 | -012 | 0.216 | 0.035 | 50 |
| MIL-SPEC | M17/86-00001 | COAX | -6B | _ | 0.440 | 0.094 | 50 |
| MIL-SPEC | M17/90-RG71 | COAX | -2B | -015A | 0.250 | 0.025 | 93 |
| MIL-SPEC | M17/97-RG210 | COAX | -2B | -013B | 0.250 | 0.026 | 93 |
| MIL-SPEC | M27500-22TE2T14 | TWINAX | -45 | -210 | 0.137 | 0.032 | _ |
| MIL-SPEC | M27500-22TN2N06 | TWINAX | -29 | -201 | 0.134 | 0.029 | _ |
| MIL-SPEC | M27500-24S82T23 | TWINAX | _ | -208 | 0.101 | 0.021 | 78 |
| MONTROSE | 9835-735 | COAX | * | -026 | 0.135 | 0.015 | 75 |
| MONTROSE | CDT 735A | COAX | _ | -026 | 0.129 | 0.016 | 75 |
| MONTROSE | IFX4385 | COAX | _ | -004 | 0.100 | 0.013 | 75 |
| MONTROSE/CDT | CBL 1225 | TWINAX | _ | -225 | 0.200 | 0.022 | 124 |
| MONTROSE/CDT | CBL 1233 | COAX | -2A | -025 | 0.225 | 0.033 | 75 |
| MONTROSE/CDT | CBL 1235 | COAX | -2A | -025 | 0.235 | 0.031 | 75 |
| MONTROSE/CDT | CBL 1288-() | COAX | _ | -026 | 0.129 | 0.016 | 75 |
| MONTROSE/CDT | CBL 2108 | COAX | -2A | -025 | 0.235 | 0.031 | 75 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

Cable Group Table

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|-----------------------|--------------------|------------|--------------|-------------|-------------|-----------|-----------|
| MONTROSE/CDT | CBL 2109 | COAX | -2A | -025 | 0.241 | 0.034 | 75 |
| MONTROSE/CDT | CBL 2721 | TRIAx | -7 | -306 | 0.250 | 0.037 | 50 |
| MONTROSE/CDT | CBL 2726 | COAX | * | -026 | 0.133 | 0.016 | 75 |
| MONTROSE/CDT | CBL 7820 | COAX | -21 | * | 0.165 | 0.035 | — |
| MONTROSE/CDT | CBL 9835-735 | COAX | * | -026 | 0.136 | 0.014 | 75 |
| MONTROSE/CDT | CBL 9956 | TWINAX | -56 | * | 0.170 | 0.037 | 78 |
| MONTROSE/CDT | CBL3340 | COAX | — | -004 | 0.077 | 0.011 | 75 |
| NATIONAL WIRE & CABLE | S10-9723 | TWINAX | -55 | -214 | 0.226 | 0.021 | — |
| NAVAIR | 67A37A130 | COAX | -4 | * | 0.140 | 0.031 | — |
| NAVSEA | 6322369 | TRIAx | -60 | — | 0.188 | 0.029 | 50 |
| NORTHERN TELECOM | NT-734 | COAX | — | -025 | — | — | — |
| NORTHERN TELECOM | NT-735 | COAX | * | -026 | 0.130 | 0.016 | 75 |
| PIC WIRE | L8620TX | TRIAx | -60 | — | 0.178 | 0.035 | — |
| PIC WIRE & CABLE | L2201TX | TRIAx | -25A | -306 | 0.250 | 0.038 | 50 |
| PIC WIRE & CABLE | S33141 | COAX | -41 | — | 0.272 | 0.067 | — |
| RAYCHEM | EPD49311Q | COAX | -1 | -021 | 0.197 | 0.035 | 50 |
| RAYCHEM | 10584 | TRIAx | -24A | — | 0.148 | 0.012 | — |
| RAYCHEM | 10586 | TRIAx | -24A | — | 0.148 | 0.012 | — |
| RAYCHEM | 10595 | TWINAX | * | -204 | 0.133 | 0.025 | — |
| RAYCHEM | 10599 | TWINAX | -24 | -210 | 0.145 | 0.031 | — |
| RAYCHEM | 10600 | TWINAX | * | -213 | 0.216 | 0.032 | — |
| RAYCHEM | 10602 | TWINAX | -45 | -204 | 0.144 | 0.025 | — |
| RAYCHEM | 10606 | TWINAX | * | -223 | 0.117 | 0.021 | 75 |
| RAYCHEM | 10612 | TWINAX | * | -204 | 0.128 | 0.025 | 77 |
| RAYCHEM | 10613 | TWINAX | * | -222 | 0.154 | 0.025 | 77 |
| RAYCHEM | 10614 | TWINAX | -24 | -221 | 0.161 | 0.025 | 77 |
| RAYCHEM | 0024A0024 | TWINAX | -24 | -217 | 0.152 | 0.025 | 100 |
| RAYCHEM | 0528A0424 | TWINAX | -47 | — | 0.116 | 0.015 | 105 |
| RAYCHEM | 10598-30-9X | TRIAx | * | -303 | 0.148 | 0.012 | — |
| RAYCHEM | 10612-24-9 | TWINAX | * | -204 | 0.132 | 0.027 | 77 |
| RAYCHEM | 1301-TZD 101 06 UX | TWINAX | -55 | -204 | 0.217 | 0.024 | — |
| RAYCHEM | 2524A0424 | TWINAX | * | -212 | 0.172 | 0.025 | 125 |
| RAYCHEM | 2524E0311-9 | TWINAX | * | -224 | 0.201 | 0.025 | 125 |
| RAYCHEM | 2524F0524 | TWINAX | * | -218 | 0.148 | 0.025 | 125 |
| RAYCHEM | 2524K0524 | TWINAX | -55 | -224 | 0.194 | 0.025 | 125 |
| RAYCHEM | 2526D1114 | TWINAX | * | -219 | 0.144 | 0.019 | 125 |
| RAYCHEM | 2526E1114 | TWINAX | -24 | -219 | 0.147 | 0.019 | 125 |
| RAYCHEM | 2530A0314 | TWINAX | -27 | -208 | 0.105 | 0.012 | 125 |
| RAYCHEM | 2530A1317 | COAX | -63 | — | 0.203 | 0.013 | 125 |
| RAYCHEM | 44M9996-20-2/6-0 | TWINAX | -24 | * | 0.157 | 0.039 | — |
| RAYCHEM | 5012A3311 | COAX | -50 | — | 0.350 | 0.088 | 50 |
| RAYCHEM | 5012W5812 | TRIAx | -61 | * | 0.437 | 0.089 | 50 |
| RAYCHEM | 5020A1311 | COAX | -4 | * | 0.155 | 0.040 | 50 |
| RAYCHEM | 5020A1811 | COAX | -21 | * | 0.165 | 0.039 | 50 |
| RAYCHEM | 5021D1331 | COAX | * | -021 | 0.188 | 0.035 | 50 |
| RAYCHEM | 5021H5331 | TRIAx | -25A | — | 0.258 | 0.035 | 50 |
| RAYCHEM | 5022D5112 | TRIAx | -43 | — | 0.175 | 0.032 | 50 |
| RAYCHEM | 5022D5311 | TRIAx | -43 | — | 0.175 | 0.032 | 50 |
| RAYCHEM | 5022E5111 | TRIAx | -57 | -302 | 0.164 | 0.033 | 50 |
| RAYCHEM | 5024A1311 | COAX | -36 | * | 0.104 | 0.025 | 50 |
| RAYCHEM | 5024A1661 | TWINAX | -27 | * | 0.108 | 0.025 | 50 |
| RAYCHEM | 5024A3111 | COAX | -5 | -003 | 0.113 | 0.019 | 50 |
| RAYCHEM | 5026A1111 | COAX | -44 | — | 0.080 | 0.019 | 50 |
| RAYCHEM | 5026A1614 | COAX | -44 | — | 0.080 | 0.019 | 50 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|--------------|------------|--------------|-------------|-------------|-----------|-----------|
| RAYCHEM | 5026A1664 | TWINAX | -49 | * | 0.085 | 0.019 | 50 |
| RAYCHEM | 5026D5314 | TRIAx | -23 | _ | 0.132 | 0.019 | 50 |
| RAYCHEM | 5028A2211-9 | COAX | -44 | _ | _ | 0.013 | 50 |
| RAYCHEM | 5028A3318 | COAX | -5B | -004 | 0.090 | 0.014 | 50 |
| RAYCHEM | 5030A1114 | COAX | -5A | -001 | 0.061 | 0.012 | 50 |
| RAYCHEM | 5030A1214 | COAX | -5A | _ | 0.061 | 0.012 | 50 |
| RAYCHEM | 5030A1314 | COAX | -5A | _ | 0.063 | 0.012 | 50 |
| RAYCHEM | 5030A1318 | COAX | -5A | _ | 0.063 | 0.012 | _ |
| RAYCHEM | 5030A1411 | COAX | -5A | _ | 0.066 | 0.012 | 50 |
| RAYCHEM | 5030A1511 | COAX | -5A | _ | 0.066 | 0.012 | 50 |
| RAYCHEM | 55A1121-24 | TWINAX | -27 | -223 | 0.107 | 0.025 | _ |
| RAYCHEM | 55A1122-26 | TWINAX | * | -223 | 0.102 | 0.021 | _ |
| RAYCHEM | 7028A5518 | TRIAx | -26 | _ | 0.143 | 0.015 | 70 |
| RAYCHEM | 7520A1311 | COAX | -52 | -024 | 0.241 | 0.040 | 75 |
| RAYCHEM | 7522A1311 | COAX | _ | -023 | _ | _ | 75 |
| RAYCHEM | 7522D5311 | TRIAx | -25A | _ | 0.269 | 0.031 | 75 |
| RAYCHEM | 7523D1331 | COAX | -2 | -013 | 0.246 | 0.023 | 75 |
| RAYCHEM | 7524A1311 | COAX | -21 | _ | 0.160 | 0.025 | 75 |
| RAYCHEM | 7524A1312 | COAX | -22 | _ | 0.152 | 0.025 | 75 |
| RAYCHEM | 7524A1811 | COAX | -37 | _ | 0.152 | 0.025 | 75 |
| RAYCHEM | 7524D5811 | TRIAx | _ | -306 | 0.243 | 0.025 | _ |
| RAYCHEM | 7526A5311 | TRIAx | -60 | _ | 0.215 | 0.019 | 75 |
| RAYCHEM | 7526D5318 | TWINAX | -59 | _ | 0.167 | 0.020 | 75 |
| RAYCHEM | 7526J1660 | TWINAX | -47 | _ | 0.115 | 0.019 | 75 |
| RAYCHEM | 7528A1114 | COAX | -36 | -004 | 0.100 | 0.015 | 75 |
| RAYCHEM | 7528A1317 | COAX | -5 | -004 | 0.102 | 0.015 | 75 |
| RAYCHEM | 7528A5314 | TRIAx | -64 | -303 | 0.148 | 0.015 | 75 |
| RAYCHEM | 7528F5614 | TRIAx | * | -303 | 0.141 | 0.015 | 75 |
| RAYCHEM | 7528G1312-7 | COAX | -36 | * | 0.110 | 0.015 | _ |
| RAYCHEM | 7720C8662 | TWINAX | | -213 | _ | 0.020 | 77 |
| RAYCHEM | 7722C2664 | TWINAX | -24 | -210 | 0.143 | 0.032 | 77 |
| RAYCHEM | 7722C3661 | TWINAX | -24 | * | 0.178 | 0.032 | 77 |
| RAYCHEM | 7722C3861 | TWINAX | * | -215 | 0.232 | 0.031 | 77 |
| RAYCHEM | 7724C1664-9 | TWINAX | * | -204 | 0.127 | 0.023 | 77 |
| RAYCHEM | 7724C3864 | TWINAX | * | -212 | 0.200 | 0.024 | 77 |
| RAYCHEM | 7724C8664 | TWINAX | * | -221 | 0.155 | 0.025 | _ |
| RAYCHEM | 7724G3664 | TWINAX | -45 | -222 | 0.154 | 0.025 | 77 |
| RAYCHEM | 7724N0664 | TWINAX | -45 | -204 | 0.144 | 0.025 | 78 |
| RAYCHEM | 7726D066A | TWINAX | -27 | -223 | 0.112 | 0.020 | 77 |
| RAYCHEM | 7824E0422 | TWINAX | -29 | -204 | 0.135 | 0.025 | 78 |
| RAYCHEM | 7826D0130 | TWINAX | -29 | -206 | 0.120 | 0.025 | 78 |
| RAYCHEM | 9324D0130 | TWINAX | * | 212 | 0.167 | 0.025 | 93 |
| RAYCHEM | 9528A1317 | COAX | * | -026 | 0.137 | 0.015 | 95 |
| RAYCHEM | 9528A1417 | COAX | * | -026 | 0.137 | 0.015 | 95 |
| RAYCHEM | 9528A1517 | COAX | * | -026 | 0.137 | 0.015 | 95 |
| RAYCHEM | 9528D5114 | TRIAx | -60 | -305 | 0.177 | 0.015 | 95 |
| RAYCHEM | 9530A5117 | TRIAx | -24A | _ | 0.149 | 0.012 | _ |
| RAYCHEM | 9530D5117 | TRIAx | -56 | -301 | 0.164 | 0.013 | 95 |
| RAYCHEM | 9530D5317 | TRIAx | -59 | _ | 0.170 | 0.012 | 95 |
| RAYCHEM | 9530H1118 | COAX | -36 | _ | 0.108 | 0.013 | 95 |
| RAYCHEM | 9532A5114 | TRIAx | -23 | _ | 0.140 | 0.008 | 95 |
| RAYCHEM | 9532A5314 | TRIAx | -23 | _ | 0.130 | 0.008 | 95 |
| RAYCHEM | EPC29116C | TRIAx | -32 | -309 | 0.152 | 0.017 | _ |
| RAYCHEM | EPD 60441 | TRIAx | -25A | TOO LARGE | 0.256 | 0.035 | 50 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

Cable Group Table

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|-------------------------|------------|--------------|-------------|-------------|-----------|-----------|
| RAYCHEM | EPD22030E | TWINAX | * | -224 | 0.209 | 0.026 | — |
| RAYCHEM | EPD22030F | TWINAX | — | -215 | 0.251 | 0.025 | — |
| RAYCHEM | EPD22188B | TWINAX | — | -218 | 0.150 | 0.025 | — |
| RAYCHEM | EPD26467Q | TRIAx | -23 | -303 | 0.136 | 0.012 | — |
| RAYCHEM | EPD27364A | TWINAX | -11 | TOO LARGE | 0.311 | 0.038 | 77 |
| RAYCHEM | EPD29102A | COAX | -2 | -013 | 0.243 | 0.023 | 75 |
| RAYCHEM | EPD30653Q | TWINAX | * | -217 | 0.150 | 0.025 | — |
| RAYCHEM | EPD33017Q | COAX | -5 | -003 | 0.106 | 0.020 | — |
| RAYCHEM | EPD33698Q | TRIAx | -32 | — | 0.142 | 0.015 | — |
| RAYCHEM | EPD33727Q | TRIAx | -33 | — | 0.185 | 0.012 | — |
| RAYCHEM | EPD38474Q | TRIAx | -13 | TOO LARGE | 0.330 | 0.022 | — |
| RAYCHEM | EPD44692 | TWINAX | -29 | -217 | 0.146 | 0.025 | 77 |
| RAYCHEM | EPD46270Q | TRIAx | -9 | -306 | 0.260 | 0.037 | — |
| RAYCHEM | EPD49317Q | COAX | -63 | — | 0.228 | 0.025 | 75 |
| RAYCHEM | EPD49334Q | TRIAx | -8 | TOO LARGE | 0.322 | 0.023 | 75 |
| RAYCHEM | EPD49336Q | TRIAx | -13A | TOO LARGE | 0.322 | 0.023 | — |
| RAYCHEM | EPD49338Q | TWINAX | -9 | — | — | — | — |
| RAYCHEM | EPD60947Q | TRIAx | -7 | — | 0.260 | 0.042 | — |
| RAYCHEM | EPD6314 | TWINAX | -29 | -201 | 0.136 | 0.025 | 77 |
| RAYCHEM | EPD647100-01 | COAX | -6B | TOO LARGE | 0.433 | 0.088 | 50 |
| RAYCHEM | EPD7246Q | COAX | -6A | TOO LARGE | 0.406 | 0.048 | 75 |
| RAYCHEM | EPD76761 | TWINAX | — | -212 | 0.177 | 0.024 | 77 |
| RAYCHEM | EPD8274-1 | TRIAx | -13 | TOO LARGE | 0.314 | — | — |
| RAYCHEM | M27500-22ML2TO8 | TWINAX | -45 | -204 | 0.134 | 0.028 | — |
| RAYCHEM | M27500-22RC2506 | TWINAX | * | -217 | 0.145 | 0.025 | — |
| RAYCHEM | M27500-26RC2506 | TWINAX | -47 | -223 | 0.110 | 0.019 | — |
| RAYCHEM | M27500-26RC2509 | TWINAX | -27 | — | 0.110 | 0.018 | — |
| RAYCHEM | URM54 | TRIAx | -13 | — | 0.327 | 0.023 | — |
| SEIMENS | 2YCVCY 0.63/3.7-75 | TRIAx | -13A | TOO LARGE | 0.307 | 0.025 | 75 |
| SUHNER | G 04233 D-10 | COAX | -2B | * | 0.256 | 0.023 | 75 |
| SUHNER | G01330HT | TRIAx | -56 | — | 0.177 | 0.016 | — |
| SUHNER | G02262 | COAX | -5 | -003 | 0.110 | 0.019 | — |
| SUHNER | G02332 | TRIAx | -26 | — | 0.167 | 0.035 | — |
| SUHNER | G02333 | TRIAx | -59 | — | 0.169 | 0.010 | — |
| SUHNER | G03233D | COAX | -3 | — | 0.212 | 0.017 | — |
| SUHNER | GX03272D-06 | COAX | -3 | -012 | 0.213 | 0.035 | — |
| SUHNER | S02223 | COAX | — | -004 | 0.100 | 0.04 | 75 |
| SUHNER | S04233 | COAX | -2B | -014 | 0.243 | 0.034 | 75 |
| SUMIRE | 4C-HEB-NL | COAX | — | -25 | 0.236 | 0.035 | 75 |
| SUMITOMO | 2.5C | COAX | -22 | -008 | 0.154 | 0.015 | — |
| SUMITOMO | 2C | COAX | * | -008 | 0.147 | 0.012 | — |
| SUPERIOR | FVP224 | TWINAX | -9 | -214 | 0.242 | 0.021 | — |
| SUPERIOR ESSEX | SERIES 11 | COAX | -6A | -052 | 0.400 | 0.060 | 75 |
| TENSOLITE | 8712812 | TWINAX | -47 | -201 | — | — | — |
| TENSOLITE | 10047-9219-01 | TRIAx | -32 | -302 | 0.166 | 0.031 | — |
| TENSOLITE | 1936-TX-10C2SW | TWINAX | -47 | -201 | 0.129 | 0.024 | — |
| TENSOLITE | 24453/42810 Q-2 | QUADRAX | -58 | -217 | 0.145 | 0.025 | — |
| TENSOLITE | 24499/898X2 | TWINAX | -24 | -204 | 0.125 | 0.025 | — |
| TENSOLITE | 26433/9P175T-2 | TWINAX | -27 | -205 | 0.090 | 0.019 | — |
| TENSOLITE | 26840/9D099LV-2 | TWINAX | * | -223 | 0.110 | 0.019 | — |
| TENSOLITE | 28883/31169Q-1 | TRIAx | -23 | — | 0.135 | 0.015 | 75 |
| TENSOLITE | 28883/T290TX-1 | TRIAx | -23 | — | 0.135 | 0.015 | 75 |
| TENSOLITE | 30852/9B2581V-1 28GA | COAX | -5A | -001 | 0.079 | 0.010 | — |
| TENSOLITE | 30880/4119X-1 | COAX | -44 | * | 0.073 | 0.011 | — |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

| CABLE MANUFACTURER | CABLE NUMBER | CABLE TYPE | WRENCH STYLE | CRIMP STYLE | JACKET SIZE | CONDUCTOR | IMPEDANCE |
|--------------------|-------------------|------------|--------------|-------------|-------------|-----------|-----------|
| TENSOLITE | 30895/25L-1 | TRIAx | 60 | - | - | - | - |
| TENSOLITE | 5M2397-002 | TRIAx | -23 | -303 | 0.136 | 0.014 | - |
| TENSOLITE | 5280W502 | TWINAX | -24 | -218 | 0.154 | 0.023 | - |
| TENSOLITE | ST5M1284-001 | TWINAX | * | -212 | 0.180 | 0.024 | 96 |
| TENSOLITE | STME637-2 | TWINAX | - | -206 | - | - | - |
| TEXAS INSTRUMENTS | 417889-2 | TRIAx | * | -307 | 0.185 | 0.012 | 93 |
| TEXAS INSTRUMENTS | 802857-1 | TWINAX | -24 | * | 0.162 | 0.031 | 70 |
| THERMATICS | 11079 | TWINAX | -29 | -204 | 0.130 | 0.025 | - |
| THERMATICS | 11421 | TWINAX | - | -223 | 0.104 | 0.019 | - |
| THERMATICS | 11421 | TWINAX | - | -223 | - | - | - |
| THERMATICS | 425-1680-030VW-1 | COAX | - | -013 | - | - | - |
| THERMATICS | 5M2022-003 | TWINAX | * | -204 | 0.130 | 0.024 | - |
| THERMATICS | 8712812 (A/F DWG) | TWINAX | -47 | -201 | 0.125 | 0.023 | - |
| THERMATICS | NEC725-2(G) | COAX | 53 | - | - | - | - |
| THERMAX | 68-1938TF(2)SXE | TWINAX | - | -223 | 0.104 | 0.019 | - |
| THERMAX | 77-1936TF(2)TFPA | TWINAX | -47 | -201 | 0.125 | 0.024 | 77 |
| THERMAX | 983-495 | COAX | -4 | * | 0.144 | 0.024 | 75 |
| THERMAX | 985-495 | COAX | -4 | * | 0.144 | 0.024 | 75 |
| THERMAX | M27500-22TG2T14 | TWINAX | -29 | - | 0.132 | 0.031 | - |
| THERMAX | RG58/BLACK | COAX | -1 | -011 | - | - | 50 |
| THERMAX | RGS-316 | COAX | -5 | -003 | 0.102 | 0.020 | 50 |
| THERMAX | RGS-316 | COAX | -5 | -003 | 0.102 | 0.020 | 50 |
| TIMES | 2382 | COAX | -6A | - | 0.400 | 0.064 | 75 |
| TIMES | 2391 | COAX | -41 | -020 | 0.273 | 0.041 | 75 |
| TIMES | 2560 | COAX | -41 | - | 0.271 | 0.040 | - |
| TIMES | 8712812 | TWINAX | -47 | -201 | - | - | - |
| TIMES | 100A | COAX | -5 | -003 | 0.105 | 0.018 | 50 |
| TIMES | 2260V | COAX | -6 | * | 0.296 | 0.040 | 75 |
| TIMES | 2360V | COAX | -41 | -020 | 0.273 | 0.040 | 75 |
| TIMES | 25B3M | COAX | -2 | -014 | 0.242 | 0.031 | - |
| TIMES | 65555-RD316 | COAX | -5 | -003 | 0.113 | 0.021 | - |
| TIMES | AA-2317 | TRIAx | -24A | * | 0.169 | 0.025 | 50 |
| TIMES | AA-2325 | TRIAx | * | -308 | 0.215 | 0.020 | 95 |
| TIMES | AA-2511 | COAX | -2A | - | 0.220 | 0.020 | - |
| TROMPETER | TWCH-78-1 | TWINAX | -29 | -202 | 0.155 | 0.022 | 78 |
| TROMPETER | TWCH-78-2 | TWINAX | -9 | -213 | 0.247 | 0.037 | 78 |
| TROMPETER | TWCN-124-1A | TWINAX | -29 | -203 | - | - | - |
| TROMPETER | TWCP-124-2 | TWINAX | -9 | -214 | 0.250 | 0.024 | 124 |
| TROMPETER | TWCP-124-3 | TWINAX | -55 | -224 | 0.215 | 0.024 | 124 |
| TROMPETER | TWCP-124-5 | TWINAX | * | -226 (70MC) | 0.335 | 0.048 | 124 |
| TROMPETER | TWCP-78-1 | TWINAX | -47 | - | 0.155 | 0.019 | 78 |
| TROMPETER | TWCP-78-2 | TWINAX | -9 | -213 | 0.247 | 0.037 | 78 |

Note: * = Special contact customer service
For a complete listing please refer to the online catalog.

| Part Number | Page | Part Number | Page | Part Number | Page |
|---------------------|-------|---------------------|------|--|-------|
| AD1(W)..... | 47 | BJ79C(TL/FL)..... | 7 | BJ883..... | 24 |
| (U)AD48..... | 33 | BJ79HS..... | 16 | BJ893..... | 24 |
| (U)AD95..... | 38 | BJ80..... | 24 | BJ893F..... | 24 |
| AD131..... | 39 | BJ88..... | 24 | BJ3150..... | 19 |
| AD1300..... | 39 | BJ89..... | 24 | BJ3150HS..... | 16 |
| ADAPTERS..... | 58 | BJ89F..... | 24 | BJ3150SHS..... | 16 |
| ADAPTER TABLE..... | 58-61 | (U)BJ95..... | 38 | BJ3152..... | 19 |
| AD1WHD..... | 47 | (U)BJ98-2..... | 38 | BJ3153..... | 19 |
| ADH1(W)..... | 47 | (U)BJ120..... | 35 | BJ3154AC..... | 19 |
| ADM1..... | 50 | (U)BJ120SL..... | 35 | BJ3157..... | 19 |
| ADM2..... | 50 | BJ150(FL)..... | 19 | BJ3157F..... | 19 |
| (U)AD228..... | 27 | BJ152(FL)..... | 19 | BJ3158..... | 19 |
| (U)AD48..... | 33 | BJ153(FL)..... | 19 | BJ3159..... | 18 |
| AD78 (TL/FL)..... | 6 | BJ154AC(FL)..... | 19 | BJ3159AC..... | 18 |
| (U)AD95..... | 38 | BJ157(FL)..... | 19 | BJ3450..... | 22 |
| AD158(FL)..... | 20 | BJ157F(FL)..... | 19 | BJ3457..... | 22 |
| (U)AD195..... | 38 | BJ157FLHS..... | 16 | BJ3459AC(P/S)..... | 23 |
| AD378..... | 6 | BJ157HS..... | 16 | (U)BN23..... | 27 |
| AD3158..... | 20 | BJ158(FL)..... | 19 | BN73(TL/FL)..... | 9 |
| ADMW12..... | 47 | BJ159..... | 18 | BN83..... | 24 |
| ADRMF70(TL/FL)..... | 6 | BJ159AC..... | 18 | BN153(FL)..... | 20 |
| ADRMF370..... | 6 | BJ159ACFL..... | 18 | BN373..... | 9 |
| (U)ADRMF220..... | 27 | BJ159FL..... | 18 | BN383..... | 24 |
| APPENDIX..... | 66-91 | (U)BJ220..... | 27 | BN833..... | 24 |
| BCS/C24T3D..... | 62 | (U)BJ224..... | 28 | BN3153..... | 20 |
| BCS/C24T3W..... | 62 | (U)BJ224-RIA..... | 28 | BNC Coax Connector..... | 26 |
| (U)BJ20..... | 28 | (U)BJ227..... | 28 | BNC Coax Tester..... | 64 |
| (U)BJ20SL..... | 28 | (U)BJ228..... | 28 | BNC TOOL/WRENCH CRIMP ASSEMBLY ILLUSTRATIONS..... | 72 |
| (U)BJ21..... | 28 | BJ249..... | 34 | CABLE ASSEMBLY TESTER..... | 64 |
| (U)BJ23..... | 28 | BJ3459AC (P/S)..... | 23 | CABLE CUTTING TOOL..... | 62 |
| (U)BJ24..... | 28 | BJ372..... | 7 | CABLE DISTRIBUTION PANELS..... | 52 |
| (U)BJ26..... | 28 | BJ373..... | 7 | CABLE GROUP TABLE..... | 74-91 |
| (U)BJ27..... | 28 | BJ73HS..... | 16 | CABLE STRIPPERS..... | 62 |
| (U)BJ28..... | 28 | BJ374..... | 7 | CBBJ26..... | 31 |
| (U)BJ29..... | 28 | BJ374C..... | 7 | (U)CBBJ29..... | 31 |
| BJ30..... | 25 | BJ375..... | 7 | CBBJ74..... | 8 |
| BJ31..... | 25 | BJ376..... | 7 | CBBJ79..... | 8 |
| BJ38..... | 25 | BJ376HS..... | 16 | CBBJ79 (TL/FL)..... | 8 |
| BJ39..... | 25 | BJ377..... | 7 | CBBJ379..... | 8 |
| (U)BJ40..... | 34 | BJ378..... | 7 | (U)CBBJR26(RC)..... | 31 |
| (U)BJ41..... | 34 | BJ378HS..... | 16 | (U)CBBJR29(RC)..... | 31 |
| (U)BJ46..... | 34 | BJ379..... | 7 | CBBJR39A..... | 25 |
| (U)BJ47..... | 34 | BJ379C..... | 7 | (U)CBBJR46(A)..... | 34 |
| (U)BJ48..... | 33 | BJ380..... | 24 | (U)CBBJR49..... | 34 |
| (U)BJ49..... | 34 | BJ388..... | 24 | CBBJR74..... | 8 |
| BJ50..... | 42 | BJ389(F)..... | 24 | CBBJR74 (TL/FL)..... | 8 |
| BJ57..... | 42 | BJ450P(P/S)..... | 22 | CBBJR79..... | 8 |
| BJ58..... | 42 | BJ450R(P/S)..... | 22 | CBBJR79 (TL/FL)..... | 8 |
| BJ59..... | 42 | BJ450W(P/S)..... | 22 | CBBJR159..... | 20 |
| BJ72(TL/FL)..... | 7 | BJ450FL(P/S)..... | 22 | CBBJR374..... | 8 |
| BJ73HS..... | 16 | BJ457P(P/S)..... | 22 | CBBJR379..... | 8 |
| BJ73(TL/FL)..... | 7 | BJ457R(P/S)..... | 22 | (U)CBJR20A..... | 30 |
| BJ74(TL/FL)..... | 7 | BJ457W(P/S)..... | 22 | (U)CBJR220..... | 30 |
| BJ74C..... | 7 | BJ457FL(P/S)..... | 22 | CBJ157(FL)..... | 20 |
| BJ74C(TL/FL)..... | 7 | BJ459ACFL(P/S)..... | 23 | CBJ20..... | 30 |
| BJ75(TL/FL)..... | 7 | BJ459ACP (P/S)..... | 23 | CBJ22..... | 30 |
| BJ76(TL/FL)..... | 7 | BJ459ACR (P/S)..... | 23 | CBJ70(TL/FL)..... | 8 |
| BJ77(TL/FL)..... | 7 | BJ459ACW (P/S)..... | 23 | CBJ70A..... | 8 |
| BJ77HS..... | 16 | BJ770(GL)..... | 7 | CBJ370..... | 8 |
| BJ78(TL/FL)..... | 7 | BJ803..... | 24 | CBJ3157..... | 20 |
| BJ78HS..... | 16 | BJ833..... | 24 | CBJE130-1, -2, -3..... | 39 |
| BJ79(TL/FL)..... | 7 | BJ88..... | 24 | | |

Index

| Part Number | Page | Part Number | Page | Part Number | Page |
|------------------------------------|-------|--------------------------|------|---------------------------------------|-------|
| CBJR12..... | 31 | J11MW..... | 48 | LPTWL-78..... | 15 |
| CBJR157 (FL)..... | 20 | J11MWL..... | 48 | M22520/5-01..... | 63 |
| CBJR3157..... | 20 | J11D..... | 48 | M22520/5-01/CD5#..... | 63 |
| CBJR70(A)..... | 8 | J12..... | 48 | MIL-C-49142 QPL..... | 5 |
| (U)CJ20..... | 27 | J13-R..... | 46 | MINIATURE COAX 20/220 SERIES..... | 27-31 |
| (U)CJ40..... | 33 | J13H-R..... | 46 | MINIATURE COAX 250 SERIES..... | 32 |
| (U)CJ50..... | 42 | J13W-R..... | 46 | MINI WECO COAX CIRCUIT BOARDS JACKS.. | 31 |
| CJ50FL..... | 42 | J13WH-R..... | 46 | MINI-WECO COAX PATCH JACKS..... | 48 |
| CJ70(TL/FL)..... | 6 | J24WMSTHF-75..... | 45 | MINI-WECO COAX PATCH PLUGS..... | 47 |
| CJ70C(TL/FL)..... | 6 | J72..... | 11 | MINIATURE COAX THREADED | |
| CJ80..... | 24 | J72D..... | 11 | 40-240 SERIES..... | 33-34 |
| CJ150..... | 18 | J72L..... | 12 | MINIATURE PATCHING & CABLE | |
| CJ150AC..... | 18 | J72S..... | 11 | ASSEMBLIES..... | 11,12 |
| CJ150ACFL..... | 18 | J74-2T-R..... | 13 | MINIATURE NORMAL-THRU | |
| CJ150FL..... | 18 | J74MST-R..... | 13 | PATCH JACKS..... | 13 |
| (U)CJ220..... | 27 | J74T-R..... | 13 | N CONNECTORS..... | 38 |
| (U)CJ240..... | 33 | J94..... | 41 | PATCH PLUGS..... | 49 |
| CJ350..... | 42 | (U)J95..... | 38 | PATCHING PRODUCTS..... | 45-60 |
| CJ370..... | 6 | J150..... | 14 | PCHY-L-50..... | 41 |
| CJ370C..... | 6 | J152(FL)..... | 14 | PCH-L-50..... | 41 |
| CJ380..... | 24 | J158..... | 14 | PC-L-Z..... | 55 |
| CJ450ACP(P/S)..... | 23 | J308..... | 50 | PCM-L-50..... | 50 |
| CJ450ACR(P/S)..... | 23 | J74 SERIES..... | 13 | PCM-L-75..... | 50 |
| CJ450ACW(P/S)..... | 23 | JSISM-120..... | 12 | PCMW-L-Z..... | 55 |
| CJ450ACFL(P/S)..... | 23 | LOW VSWR CONNECTORS..... | 41 | PCMX-L-50..... | 50 |
| CJ803..... | 24 | LPH-50..... | 41 | (U)PCPX-L-Z..... | 55 |
| CJ3150..... | 18 | LPLTR-50..... | 15 | (U)PCPWX-L-Z..... | 55 |
| CJ3150AC..... | 18 | LPLTR-75..... | 15 | PCW-L-Z..... | 55 |
| CJ3450AC(P/S)..... | 23 | LPLTRA-50..... | 15 | (U)PCWX-L-Z..... | 55 |
| COAX 20/220 SERIES..... | 30-31 | LPLTRA-75..... | 15 | (U)PCX-L-Z..... | 55 |
| COAX PATCH JACKS..... | 45 | LPLTRAL-50..... | 15 | (U)PCYG-L-Z..... | 55 |
| COAX RFI CAPS & TERMINATIONS..... | 57 | LPLTRAL-75..... | 15 | (U)PCY-L-Z..... | 55 |
| CONCENTRIC TWINAX 450 SERIES..... | 22-23 | LPLTW-124..... | 15 | PHENOLIC PANELS..... | 51-53 |
| CONNECTOR COMPATABILITY TABLES... | 69-70 | LPLTW2TP-124..... | 15 | PL1C..... | 47 |
| CRIMP TOOLS..... | 63 | LPLTW2TP-78..... | 15 | PL1MW..... | 48 |
| CT5..... | 63 | LPLTW-78..... | 15 | PL1MWLT..... | 48 |
| CUSTOM CABLE ASSEMBLIES..... | 56 | LPLTWA-124..... | 15 | PL1WC..... | 47 |
| D HOLES..... | 54 | LPLTWA-78..... | 15 | PL11C..... | 47 |
| DIN CONNECTORS..... | 36-37 | LPLTWAL-124..... | 15 | PL11SC..... | 47 |
| DISTRIBUTION PANELS..... | 52 | LPLTWAL-78..... | 15 | PL11SCLT..... | 47 |
| F CONNECTORS..... | 39-40 | LPM-50..... | 50 | (U)PL20..... | 27 |
| HDVDP/HDVDPM SERIES..... | 43 | LPM-75..... | 50 | (U)PL21..... | 27 |
| HDVDPT..... | 43 | LPTR-50..... | 15 | PL30..... | 25 |
| HDVDP..... | 43 | LPTR-75..... | 15 | (U)PL40..... | 33 |
| HDVDPMT..... | 43 | LPTRA-50..... | 15 | PL50..... | 42 |
| HDVDPM..... | 43 | LPTRA-75..... | 15 | PL50C..... | 42 |
| HDVDPMN..... | 44 | LPTRAL-50..... | 15 | PL71..... | 11 |
| HDVDPN..... | 43 | LPTRAL-75..... | 15 | PL71L..... | 12 |
| HERMETICALLY SEALED CONNECTORS... | 16 | LPTRL..... | 2 | PL73..... | 6 |
| HIGH FREQUENCY VIDEO PATCHING..... | 44 | LPTRL-50..... | 15 | PL73C..... | 6 |
| HP250..... | 51 | LPTRL-75..... | 15 | PL74..... | 6 |
| HP304..... | 51 | LPTW-124..... | 15 | PL74C..... | 6 |
| HP375..... | 51 | LPTW2TP-78..... | 15 | PL74MC(FL)..... | 6 |
| HP500..... | 51 | LPTW2TP-124..... | 15 | PL75(FL)..... | 6 |
| IMPEDANCE MATCHING ADAPTER..... | 59 | LPTW2TPL-78..... | 15 | PL75C..... | 6 |
| J3D(WD)..... | 46 | LPTW2TPL-124..... | 15 | PL75CFL..... | 6 |
| J3E(WE)..... | 46 | LPTW-78..... | 15 | PL75MC..... | 6 |
| J3(W)..... | 46 | LPTWA-124..... | 15 | PL80..... | 24 |
| J5(W)..... | 46 | LPTWA-78..... | 15 | PL93..... | 41 |
| J8(FL)..... | 50 | LPTWAL-124..... | 15 | PL94..... | 41 |
| J8D..... | 50 | LPTWAL-78..... | 15 | (U)PL95..... | 38 |
| J9..... | 46 | LPTWL-124..... | 15 | (U)PL121..... | 35 |

| Part Number | Page | Part Number | Page | Part Number | Page |
|------------------------------|-------|--|--------|---|--------|
| (U)PL121SL..... | 35 | RFI CAPS & TERMINATIONS..... | 10, 57 | TWINAX/TRIAX CABLE ASSEMBLY | |
| (U)PL122..... | 35 | RFI 150-1..... | 14 | TESTER..... | 64 |
| (U)PL123..... | 35 | RFI 70-1..... | 11 | TWINAX/TRIAX CONNECTORS | |
| PL130C..... | 39 | RFI455(FL)..... | 23 | 70/370 SERIES..... | 5-8 |
| PL130SC..... | 39 | RFI3455..... | 23 | TWINAX/TRIAX CONNECTORS | |
| PL150..... | 10,14 | RFI457(FL)..... | 22 | 150/3150 SERIES..... | 17-20 |
| PL153..... | 20 | RFI3457..... | 22 | TWINAX/TRIAX CONNECTORS 450/3450 | |
| PL153AC..... | 20 | RFI457(FL)..... | 22 | SERIES..... | 21-23 |
| PL155..... | 18 | RT1L..... | 65 | TWINAX/TRIAX CONNECTORS 80/380 | |
| PL155AC..... | 18 | RT1XL..... | 65 | SERIES..... | 21, 24 |
| PL155ACFL..... | 18 | RT1S..... | 65 | TWINAX/TRIAX CONNECTORS 30 | |
| PL155FL..... | 18 | RT1SS..... | 65 | SERIES..... | 21, 25 |
| (U)PL220..... | 27 | RT4L..... | 65 | TWINAX/TRIAX CONNECTORS/ MINIATURE PATCHING..... | 12 |
| (U)PL223..... | 35 | RT4S..... | 65 | TWINAX/TRIAX CONNECTORS | |
| (U)PL240..... | 33 | RTC-4L..... | 65 | SPECIFICATIONS..... | 2,3 |
| (U)PL250..... | 32 | RTR-1L..... | 65 | TWINAX/TRIAX:PLENUM/HALOGEN | |
| PL375..... | 6 | RTR-1XL..... | 65 | FREE CABLE SPECS..... | 68 |
| PL375C..... | 6 | SERIES INSTRUCTIONS 450/3450 SERIES..... | 21 | TWO-PIN POLARIZED 30 SERIES, | |
| PL375MC..... | 6 | SPC8P-201..... | 17 | TWBNC/TWTNC..... | 25 |
| PL380..... | 24 | SPC8S-201..... | 17 | UADF20M110..... | 37 |
| PL803..... | 24 | ST1..... | 62 | UADF1023M95..... | 36 |
| PL3155..... | 18 | STANDARD 19" PANELS..... | 53-54 | UADM20F110..... | 37 |
| PL3155AC..... | 18 | STANDARD COAX PATCH JACKS..... | 50 | UBJ110..... | 37 |
| PL3455AC..... | 23 | STANDARD COAX PATCHING & LOOPING PLUGS..... | 49 | UBJ1023..... | 36 |
| PL455ACP(P/S)..... | 23 | STANDARD & MINI-WECO COAX | | UCBJ20F..... | 30 |
| PL455ACR(P/S)..... | 23 | PATCH PLUGS..... | 46 | UCBJ29..... | 31 |
| PL455ACW(P/S)..... | 23 | STANDARD PANEL SPECIFICATIONS..... | 51 | UCBJ223..... | 30 |
| PL4455ACF(P/S)..... | 23 | STANDARD THREADED..... | 24 | UCBJ250(N/G)..... | 32 |
| PLR74C..... | 6 | STANDARD TWINAX/TRIAX | | UCBJE20-1..... | 29 |
| PLR75C..... | 6 | LOOPING PLUGS..... | 15 | UCBJE20-2..... | 29 |
| PLR75CFL..... | 6 | STC-F..... | 62 | UCBBJE20-1..... | 29 |
| PLR130SC..... | 40 | STC-W..... | 62 | UCBBJE20-2..... | 29 |
| PLR155AC..... | 18 | SUBMINIATURE 150/3150 SERIES..... | 20 | UCBBJE20-3..... | 29 |
| PLR155ACFL..... | 18 | SUBMINIATURE BULKHEAD JACKS..... | 19 | UCBBJE20-4..... | 29 |
| (U)PLR220..... | 27 | SUBMINIATURE JACKS & PLUGS..... | 18 | UCBBJ1023..... | 36 |
| PLR375C..... | 6 | SUBMINIATURE TWINAX/TRIAX | | UCBJR250(N/G)..... | 32 |
| PLR455ACP(P/S)..... | 22 | LOOPING PLUGS..... | 15 | UJ9W..... | 46 |
| PLR455ACR(P/S)..... | 22 | SUBMINIATURE PATCHING..... | 14 | UPL110..... | 37 |
| PLR455ACW(P/S)..... | 22 | TBJ451P..... | 22 | UPL250..... | 32 |
| PLR455ACFL(P/S)..... | 22 | TBJ451FLP..... | 22 | UPL1023..... | 36 |
| PLR3155AC..... | 18 | TBJ451P..... | 22 | UPLR1023..... | 36 |
| PLR3455AC(P/S)..... | 22 | TBJ451S..... | 22 | 75 OHM MINI-WECO COAX | |
| PN2..... | 45 | TBJ451FLS..... | 22 | PATCH JACKS..... | 48 |
| PN2A..... | 45 | TBJ3451(P/S)..... | 22 | 010-0097..... | 63 |
| PN2C..... | 45 | TN2..... | 9 | 010-0088..... | 63 |
| PTR-L-W..... | 11 | TN2 (TL/FL)..... | 9 | 010-0123..... | 64 |
| PTRM-L-Z..... | 14 | TN2 (TL/FL) A..... | 9 | 010-0133..... | 64 |
| PTRMX-L-Z..... | 14 | TN2A..... | 9 | 010-0208..... | 64 |
| PTRMY-L-Z..... | 14 | TN2T..... | 9 | 105-1496..... | 37 |
| PTRS-L-Z..... | 11 | TNG2-R..... | 8 | 155-0830-1..... | 12 |
| PTRX-L-Z..... | 11 | TNG3-R..... | 9 | 305-0138..... | 9 |
| PTRYL-L-Z..... | 12 | TNG451FL(P/S)..... | 23 | 700-0024..... | 62 |
| PTRY-L-Z..... | 11 | TNG451P(S)..... | 23 | | |
| PTW-L-Z..... | 11 | TNG3451(P/S)..... | 23 | | |
| PTWM-L-Z..... | 14 | TNGM1-1-R..... | 14 | | |
| PTWMX-L-Z..... | 14 | TNM3-Z..... | 14 | | |
| PTWMY-L-Z..... | 14 | TOOLS & ACCESSORIES..... | 62-64 | | |
| PTWS-L-Z..... | 11 | TOOL KIT & BULK PACKAGING..... | 65 | | |
| PTWX-L-Z..... | 11 | TPW-1-R..... | 47 | | |
| PTWYL-L-Z..... | 12 | TPT-1-R..... | 11,47 | | |
| PTWY-L-Z..... | 11 | TROMPETER CABLE SPECS..... | 66-67 | | |
| PUSH-ON COAX 120 SERIES..... | 35 | | | | |

Emerson Network Power Connectivity Solutions, Inc. is herein referred to as the "Seller" and the customer or person or entity purchasing goods ("Goods") from Seller is referred to as the "Buyer." These Terms and Conditions, any price list or schedule, quotation, acknowledgment or invoice from Seller relevant to the sale of the Goods and all documents incorporated by specific reference herein or therein, constitute the complete and exclusive statement of the terms of the agreement governing the sale of Goods by Seller to Buyer. Buyer's acceptance of the Goods will manifest Buyer's assent to these Terms and Conditions. Seller reserves the right in its sole discretion to refuse orders.

1. **PRICES:** Unless otherwise specified in writing by Seller, the price quoted or specified by Seller for the Goods shall remain in effect for thirty (30) days after the date of Seller's quotation or acknowledgment of Buyer's order for the Goods, whichever occurs first, provided an unconditional authorization from Buyer for the shipment of the Goods is received and accepted by Seller within such time period. If such authorization is not received by Seller within such thirty (30) day period, Seller shall have the right to change the price for the Goods to Seller's price for the Goods at the time of shipment. All prices are exclusive of taxes, transportation and insurance, which are to be borne by Buyer.

2. **TAXES:** Any current or future tax or governmental charge (or increase in same) affecting Seller's costs of production, sale, or delivery or shipment, or which Seller is otherwise required to pay or collect in connection with the sale, purchase, delivery, storage, processing, use or consumption of Goods, shall be for Buyer's account and shall be added to the price.

3. **TERMS OF PAYMENT:** Unless otherwise specified by Seller, terms are net thirty (30) days from date of Seller's invoice in U.S. currency. Seller shall have the right, among other remedies, either to terminate this agreement or to suspend further performance under this and/or other agreements with Buyer in the event Buyer fails to make any payment when due, which other agreements Buyer and Seller hereby amend accordingly. Buyer shall be liable for all expenses, including attorneys' fees, relating to the collection of past due amounts. If any payment owed to Seller is not paid when due, it shall bear interest, at a rate to be determined by Seller, which shall not exceed the maximum rate permitted by law, from the date on which it is due until it is paid. Should Buyer's financial responsibility become unsatisfactory to Seller, cash payments or security satisfactory to Seller may be required by Seller for future deliveries and for the Goods theretofore delivered. If such cash payment or security is not provided, in addition to Seller's other rights and remedies, Seller may discontinue deliveries.

4. **SHIPMENT AND DELIVERY:** While Seller will use all reasonable commercial efforts to maintain the delivery date(s) acknowledged or quoted by Seller, all shipping dates are approximate and not guaranteed. Seller reserves the right to make partial shipments. Seller, at its option, shall not be bound to tender delivery of any Goods for which Buyer has not provided shipping instructions and other required information. If the shipment of the Goods is postponed or delayed by Buyer for any reason, Buyer agrees to reimburse Seller for any and all storage costs and other additional expenses resulting therefrom. Risk of loss and legal title to the Goods shall transfer to Buyer for sales in which the end destination of the Goods is outside of the United States immediately after the Goods have passed beyond the territorial limits of the United States. For all other shipments, risk of loss for damage and responsibility shall pass from Seller to Buyer upon delivery to and receipt by carrier at Seller's shipping point. All shipments are F.O.B. Seller's shipping point. Any claims for shortages or damages suffered in transit are the responsibility of Buyer and shall be submitted by Buyer directly to the carrier.

Shortages or damages must be identified and signed for at the time of delivery. Buyer shall inspect Goods delivered to it by Seller immediately upon receipt, and, any course of dealing to the contrary notwithstanding, failure of Buyer to give Seller notice of any claim within 30 days after receipt of such Goods shall be an unqualified acceptance of such Goods.

5. **LIMITED WARRANTY:** Subject to the limitations of Section 6, Seller warrants that the Goods manufactured by Seller will be free from defects in material and workmanship under normal use and regular service and maintenance for a period of one year from the date of shipment of the Goods by Seller, unless otherwise specified by Seller in writing. **THIS IS THE SOLE AND EXCLUSIVE WARRANTY GIVEN BY SELLER WITH RESPECT TO THE GOODS AND IS IN LIEU OF AND EXCLUDE ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ARISING BY OPERATION OF LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE WHETHER OR NOT THE PURPOSE OR USE HAS BEEN DISCLOSED TO SELLER IN SPECIFICATIONS, DRAWINGS OR OTHERWISE, AND WHETHER OR NOT SELLER'S PRODUCTS ARE SPECIFICALLY DESIGNED AND/OR MANUFACTURED BY SELLER FOR BUYER'S USE OR PURPOSE.**

This warranty does not extend to any losses or damages due to misuse, accident, abuse, neglect, normal wear and tear, negligence (other than Seller's), unauthorized modification or alteration, use beyond rated capacity, unsuitable power sources or environmental conditions, improper installation, repair, handling, maintenance or application or any other cause not the fault of Seller. To the extent that Buyer or its agents has supplied specifications, information, representation of operating conditions or other data to Seller in the selection or design of the Goods and the preparation of Seller's quotation, and in the event that actual operating conditions or other conditions differ from those represented by Buyer, any warranties or other provisions contained herein which are affected by such conditions shall be null and void.

If within thirty (30) days after Buyer's discovery of any warranty defects within the warranty period, Buyer notifies Seller thereof in writing, Seller shall, at its option and as Buyer's exclusive remedy, repair, correct or replace F.O.B. point of manufacture, or refund the purchase price for, that portion of the Goods found by Seller to be defective. Failure by Buyer to give such written notice within the applicable time period shall be deemed an absolute and unconditional waiver of Buyer's claim for such defects. All costs of dismantling, reinstallation and freight and the time and expense of Seller's personnel and representatives for site travel and diagnosis under this warranty shall be borne by Buyer unless accepted in writing by Seller. Goods repaired or replaced during the warranty period shall be covered by the foregoing warranty for the remainder of the original warranty period or ninety (90) days from the date of shipment, whichever is longer.

Buyer assumes all other responsibility for any loss, damage, or injury to persons or property arising out of, connected with, or resulting from the use of Goods, either alone or in combination with other products/components.

Section 5 applies to any entity or person who may buy, acquire or use the Goods, including any entity or person who obtains the Goods from Buyer, and shall be bound by the limitations therein, including Section 6. Buyer agrees to provide such subsequent transferee conspicuous, written notice of the provisions of Sections 5 and 6.

6. LIMITATION OF REMEDY AND LIABILITY: THE SOLE AND EXCLUSIVE REMEDY FOR BREACH OF ANY WARRANTY HEREUNDER OTHER THAN THE WARRANTY PROVIDED UNDER SECTION 7 SHALL BE LIMITED TO REPAIR, CORRECTION OR REPLACEMENT, OR REFUND OF THE PURCHASE PRICE UNDER SECTION 5.

SELLER SHALL NOT BE LIABLE FOR DAMAGES CAUSED BY DELAY IN PERFORMANCE AND THE REMEDIES SET FORTH IN THIS AGREEMENT ARE EXCLUSIVE. IN NO EVENT, REGARDLESS OF THE FORM OF THE CLAIM OR CAUSE OF ACTION (WHETHER BASED IN CONTRACT, INFRINGEMENT, NEGLIGENCE, STRICT LIABILITY, OTHER TORT OR OTHERWISE), SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXCEED THE PRICE PAID BY BUYER FOR THE SPECIFIC GOODS PROVIDED BY SELLER GIVING RISE TO THE CLAIM OR CAUSE OF ACTION. BUYER AGREES THAT IN NO EVENT SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXTEND TO INCLUDE INCIDENTAL, CONSEQUENTIAL OR PUNITIVE DAMAGES. The term "consequential damages" shall include, but not be limited to, loss of anticipated profits, business interruption, loss of use, revenue, reputation and data, costs incurred, including without limitation, for capital, fuel, power and loss or damage to property or equipment.

Buyer expressly acknowledges and agrees that Seller has set its prices and entered into this agreement in reliance upon the limitations of liability and other terms and conditions specified herein, which allocates the risk between Seller and Buyer and form a basis of this bargain between the parties.

It is expressly understood that any technical advice furnished by Seller with respect to the use of the Goods is given without charge, and Seller assumes no obligation or liability for the advice given, or results obtained, all such advice being given and accepted at Buyer's risk.

7. **PATENTS AND COPYRIGHTS:** Subject to the limitations of the second paragraph of Section 6, Seller warrants that the Goods sold, except as are made specifically for Buyer according to Buyer's specifications, do not infringe any valid U.S. patent or copyright in existence as of the date of shipment. This warranty is given upon the condition that Buyer promptly notify Seller of any claim or suit involving Buyer in which such infringement is alleged and cooperate fully with Seller and permit Seller to control completely the defense, settlement or compromise of any such allegation of infringement. Seller's warranty as to use patents only applies to infringement arising solely out of the inherent operation according to Seller's specifications and instructions (i) of such Goods, or (ii) of

any combination of Goods acquired from Seller in a system designed by Seller. In the event such Goods are held to infringe such a U.S. patent or copyright in such suit, and the use of such Goods is enjoined, or in the case of a compromise or settlement by Seller, Seller shall have the right, at its option and expense, to procure for Buyer the right to continue using such Goods, or replace them with non-infringing Goods, or modify same to become non-infringing, or grant Buyer a credit for the depreciated value of such Goods and accept return of them. In the event of the foregoing, Seller may also, at its option, cancel the agreement as to future deliveries of such Goods, without liability.

8. EXCUSE OF PERFORMANCE: Seller shall not be liable for delays in performance or for non-performance due to acts of God; acts of Buyer; war; fire; flood; weather; sabotage; strikes or labor disputes; civil disturbances or riots; governmental requests, restrictions, allocations, laws, regulations, orders or actions; unavailability of or delays in transportation; default of suppliers; or unforeseen circumstances or any events or causes beyond Seller's reasonable control. Deliveries or other performance may be suspended for an appropriate period of time or canceled by Seller upon notice to Buyer in the event of any of the foregoing, but the balance of the agreement shall otherwise remain unaffected as a result of the foregoing.

If Seller determines that its ability to supply the total demand for the Goods, or to obtain material used directly or indirectly in the manufacture of the Goods, is hindered, limited or made impracticable due to causes set forth in the preceding paragraph, Seller may allocate its available supply of the Goods or such material without obligation to acquire other supplies of any such Goods or material among itself and its purchasers on such basis as Seller determines to be equitable without liability for any failure of performance which may result therefrom.

9. CANCELLATION: Unless otherwise agreed in writing by Seller, orders under this agreement may not be canceled by Buyer for any reason.

10. CHANGES: Buyer may request changes or additions to the Goods consistent with Seller's specifications and criteria. In the event such changes or additions are accepted by Seller, Seller may revise the price and dates of delivery.

Seller reserves the right to change designs and specifications for the Goods without prior notice to Buyer, except with respect to Goods being made-to-order for Buyer. Seller shall have no obligation to install or make such change in any Goods manufactured prior to the date of such change.

11. NUCLEAR/MEDICAL. GOODS AND SERVICES SOLD HEREUNDER ARE NOT FOR USE IN CONNECTION WITH ANY NUCLEAR, MEDICAL, LIFE-SUPPORT AND RELATED APPLICATIONS. Buyer accepts goods and services with the foregoing understanding, agrees to communicate the same in writing to any subsequent purchasers or users and to defend, indemnify and hold harmless Seller from any claims, losses, suits, judgments and damages, including incidental and consequential damages, arising from such use, whether the cause of action be based in tort, contract or otherwise, including allegations that the Seller's liability is based on negligence or strict liability.

12. BUYER'S COMPLIANCE WITH LAWS: In connection with the transactions contemplated by this agreement, Buyer is familiar with and shall fully comply with all applicable laws, regulations, rules and other requirements of the United States and of any applicable state, foreign and local governmental body in connection with the purchase, receipt, use, transfer and disposal of the Goods.

13. EXPORT/IMPORT: Buyer agrees that all applicable import and export control laws, regulations, orders and requirements, including without limitation those of the United States and the European Union, and the jurisdictions in which the Seller and Buyer are established or from which Goods and Services may be supplied, will apply to their receipt and use. In no event shall Buyer use, transfer, release, import, export, Goods in violation of such applicable laws, regulations, orders or requirements.

14. TOOLING: Tool, die, and pattern charges, if any, are in addition to the price of the Goods and are due and payable upon completion of the tooling. All such tools, dies and patterns shall be and remain the property of Seller. Charges for tools, dies, and patterns do not convey to Buyer, title, ownership interest in, or rights to possession or removal, or prevent their use by Seller for other purchasers, except as otherwise expressly provided by Seller and Buyer in writing with reference to this provision.

15. RETURNED GOODS: Except as otherwise provided with respect to warranty defects in Section 5, advance written permission to return Goods must be obtained from Seller's customer service department. Such Goods must be current, unused, catalogued Goods and must be shipped, transportation prepaid, to the Seller's specified return location. Returns made without proper written

permission will not be accepted by Seller. Credit or exchange for such returned Goods will be at the billing price or current price, whichever is lower, from which will be deducted an inspection, restocking and repacking charge and the cost of any reconditioning. Seller reserves the right to inspect Goods prior to authorizing return.

16. BUYER SUPPLIED DATA: To the extent that Seller has been provided by or on behalf of Buyer any specifications, description of operating conditions or other data and information in connection with the selection or design of the Goods, and the actual operating conditions or other circumstances differ from those provided by Buyer and relied upon by Seller, any warranties or other provisions contained herein which are affected by such conditions shall be null and void.

17. DRAWINGS: Seller's prints and drawings (including without limitation, the underlying technology) furnished by Seller to Buyer in connection with this agreement are the property of Seller and Seller retains all rights, including without limitation, exclusive rights of use, licensing and sale. Possession of such prints or drawings does not convey to Buyer any rights or license, and Buyer shall return all copies (in whatever medium) of such prints or drawings to Seller immediately upon request therefore.

18. ASSIGNMENT: Buyer shall not assign its rights or delegate its duties hereunder or any interest herein without the prior written consent of Seller, and any such assignment, without such consent, shall be void.

19. GENERAL PROVISIONS: These terms and conditions supersede all other communications, negotiations and prior oral or written statements regarding the subject matter of these terms and conditions. No change, modification, rescission, discharge, abandonment, or waiver of these terms and conditions shall be binding upon the Seller unless made in writing and signed on its behalf by a duly authorized representative of Seller. No conditions, usage of trade, course of dealing or performance, understanding or agreement purporting to modify, vary, explain, or supplement these terms and conditions shall be binding unless hereafter made in writing and signed by the party to be bound, and no modification or additional terms shall be applicable to this agreement by Seller's receipt, acknowledgment, or acceptance of purchase orders, shipping instruction forms, or other documentation containing terms at variance with or in addition to those set forth herein. Any such modifications or additional terms are specifically rejected and deemed a material alteration hereof. If this document shall be deemed an acceptance of a prior offer by Buyer, such acceptance is expressly conditional upon Buyer's assent to any additional or different terms set forth herein. No waiver by either party with respect to any breach or default or of any right or remedy, and no course of dealing, shall be deemed to constitute a continuing waiver of any other breach or default or of any other right or remedy, unless such waiver be expressed in writing and signed by the party to be bound. All typographical or clerical errors made by Seller in any quotation, acknowledgment or publication are subject to correction.

The validity, performance, and all other matters relating to the interpretation and effect of this agreement shall be governed by the law of the state of Missouri. Buyer and Seller agree that the proper venue for all actions arising in connection herewith shall be only in Missouri and the parties agree to submit to such jurisdiction. No action, regardless of form, arising out of transactions relating to this contract, may be brought by either party more than two (2) years after the cause of action has accrued. The U.N. Convention on Contracts for the International Sales of Goods shall not apply to this agreement.



EMERSON™ Network Power

Connectivity Solutions

Emerson Network Power Connectivity Solutions

US Headquarters

3000 Lakeside Drive, Ste. 308N
Bannockburn, IL 60015, USA

North America

299 Johnson Avenue, Ste. 100
Waseca, MN 56093, USA
Toll Free: 800.247.8256
Tel: 507.833.8822
Fax: 507.833.6287

ECSorders@Emerson.com

Europe, Middle East, Africa

Emerson Network Power Connectivity Solutions, Ltd.
7-13 Russell Way
Widford Industrial Estate
Chelmsford, Essex CM1 3AA
Tel: +44 1245.359.515
Fax: +44 1245.358.938

EMEAConnectivitySales@Emerson.com

Asia Pacific

Emerson Network Power Connectivity Solutions
(Shanghai) Co., Ltd.
Building 1, No. 800 ShenFu Road
XinZhiang Industry Park
Shanghai, China 201108
Tel: +86 21.5442.7668
Fax: +86 21.5442.7628


APConnectivitySales@Emerson.com

About Emerson Network Power Connectivity Solutions

Emerson Network Power Connectivity Solutions, an Emerson business, serves the needs of wireless communications, military, telephony and data networks, CATV security systems, health care, military and industrial facilities with a full spectrum of RF/microwave and fiber optic connectivity products. For more information, visit www.EmersonConnectivity.com

About Emerson

Emerson (NYSE: EMR), based in St. Louis, is a global leader in bringing technology and engineering together to provide innovative solutions to customers through its network power, process management, industrial automation, climate technologies, and appliance and tools businesses. For more information, visit www.Emerson.com



www.EmersonNetworkPower.com/Connectivity
www.EmersonConnectivity.com

Emerson Network Power

The global leader in enabling business-critical continuity.

- AC Power Systems
- Embedded Power
- Outside Plant
- Connectivity
- Inbound Power
- Precision Cooling
- DC Power Systems
- Integrated Cabinet
- Site Monitoring and Services