



## FDP SERIES LENSES For OSRAM GOLDEN DRAGON LEDs

- **High efficiency**
- **Available in 2 different beams**
- **Patent pending**

The FDP Series offer low-profile lenses especially designed for the Golden Dragon <sup>(1)</sup> LEDs from Osram Optosemiconductor.

A software-optimized aspheric profile combined with front shaped micro-lens arrays enables the generation narrow beam and medium beam output patterns (2).

The high collection efficiency reaches 85% of the total flux emitted by the LEDs. Lens holders are available either in white PC/ABS or transparent PC, and provide the proper alignment between the LEDs and the lenses.

Heat staking the four legs of the holder to the customer's PCB or heat sink provides excellent optical and mechanical assembly (see Fraen Application Note FAN01-EN (at [www.fraensrl.com](http://www.fraensrl.com))).

Typical applications are:

- Reading lamps
- Signs
- Architectural Lighting
- Street Lights



- (1) Golden Dragon is a trademark of Osram OptoSemiconductor. For technical specification on LEDs please refer to the Golden Dragon datasheet or visit [www.osram-os.com](http://www.osram-os.com)
- (2) Typical beam divergence may change with different color LEDs.

*For ordering instructions, please contact*

### **FRAEN CORPORATION**

Scott M. Grzenda  
80 Newcrossing Road  
Reading MA 01867  
Phone: 781.205.5300  
Fax: 781.942.2426  
[optics@fraen.com](mailto:optics@fraen.com)

### **FRAEN Srl**

Dimitri De Gaetano  
Via E. Fermi, 7  
20090 Settimo M (MI) – Italy  
Phone: +39-02-335.456.225  
Fax: +39 02-335.456.239  
[info@fraen.com](mailto:info@fraen.com)

*To find a local distributor, check the Fraen website.*

Website: [www.fraensrl.com](http://www.fraensrl.com)



## General Characteristics

---

Lens Material	Optical Grade PMMA
Holder Material	PC ABS or Transparent PC
Operating Temperature range	-40deg C / + 80 deg C
Storage Temperature range	-40deg C / + 80 deg C

Average transmittance in visible spectrum (400 – 700nm) >90%, as measured using 3mm thick Optical Grade PMMA.

*Please note that flow lines and weld lines on the external surfaces of the lenses are acceptable if the optical performance of the lens is within the specification described in the section "OPTICAL CHARACTERISTICS"*

### **IMPORTANT NOTE – Lenses handling and cleaning:**

*Handling: Always use gloves to handle lenses and/or handle the lenses only by the flange. Never touch the outside surfaces of the lenses with fingers; finger oils and contamination will absorb or refract light.*

*Cleaning: Clean lenses only if necessary. Use only soap and water to clean the surfaces and lenses. Never expose the lenses to alcohol, as it will damage the plastic.*



## Optical Characteristics

Typical beam total divergence (degrees)		Blue / Green Dragon	Yellow / Red Dragon	White Dragon		
		ThinGaN	ThinFilm	NOTA	Volume casting	Chip coating
Lens Part Number	Type of lens	LxW5SG	LxW5SF	LWW5SG	ZWW5SG	LWW5SG
FDP-N1-D01-xx	Narrow beam	9.0	9.0	13.0	11.0	9.5
FDP-M1-D01-xx	Medium beam	14.5	15.0	18.0	16.0	13.5

The typical total divergence is the full angle measured where the luminous intensity is half of the peak value. The typical divergence may change with different color LEDs due to different chip size and chip position tolerance.

Typical on - axis efficiency (cd/lm)		Blue Dragon	Green Dragon	Yellow Dragon	Red Dragon	White Dragon		
		ThinGaN	ThinGaN	ThinFilm	ThinFilm	NOTA	Volume casting	Chip coating
Lens Part Number	Type of lens	LBW5SG	LGW5SG	LxW5SF	LxW5SF	LWW5SG	ZWW5SG	LWW5SG
FDP-N1-D01-xx	Narrow beam	13.1	18.4	12.8	14.9	9.6	12.4	17.1
FDP-M1-D01-xx	Medium beam	5.8	8.4	6.0	6.5	5.2	6.5	9.0

To calculate the on axis intensity, multiply the on axis efficiency of the lens (cd/lm) by the total flux of the Dragon LEDs you use. For more detail on flux binning please check the datasheet of the Golden Dragon LEDs by Osram OS.

## Mechanical Characteristics


---

### **IMPORTANT - Assembly information:**

For best optical performance (shown above), correct mechanical position of the lens on the LED is critical.


To achieve correct lens position the lens must be used with a lens holder. If the lens is used alone (without a Fraen lens holder), the user should provide mechanical features in their lamp or fixture to assure the lens is concentrically aligned to the LED.

### **Lens + holder assembly view:**

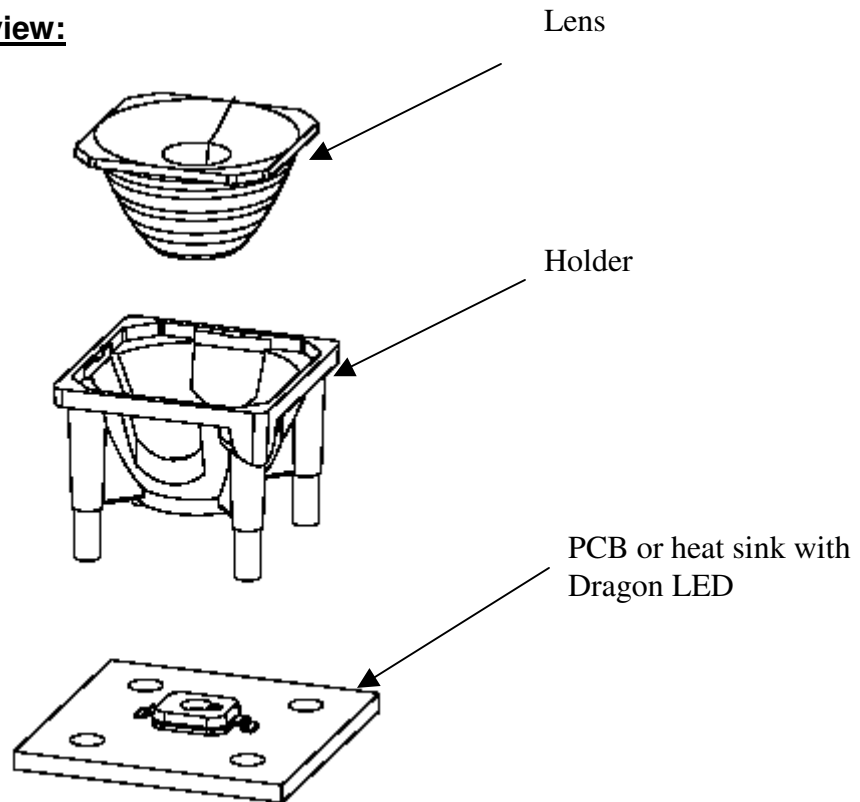


**Lens + Holder assembly dimensions on PCB board:**


tolerances : +\_0.2mm

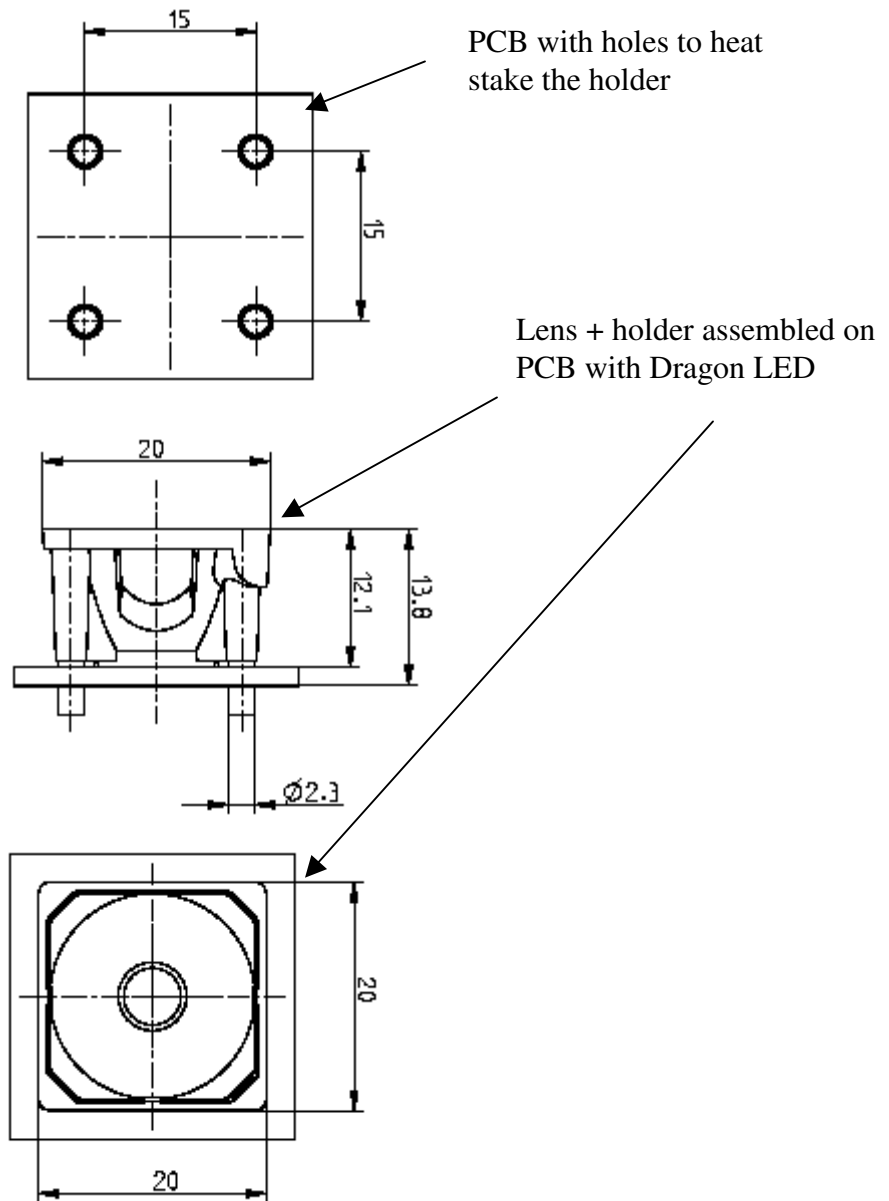

The lens can be identified by the top view:



**Narrow beam lens:**



**Medium beam lens:**

Light texture on the top lens

Please note that flow lines and weld lines on the external surfaces of the lenses are acceptable if the optical performance of the lens is within the specification described in the section "OPTICAL CHARACTERISTICS".



## Ordering part numbers

---

FDP-xx-D01-zz

HS square flange with PC ABS holder  
HST square flange with transparent PC holder  
0 lens alone

N1 Narrow beam  
M1 Medium beam

*Published by Fraen Corporation.  
All technical data contained in this document are properties of Fraen Corporation and may change without notice.*

Document Revision Record

Rev	Date	Author	Description
00			