

Triple-deck terminal block; 6-conductor ground terminal block; 2.5 mm<sup>2</sup>; PE; suitable for Ex e II applications; with marker carrier; internal commoning; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP<sup>®</sup>; 2,50 mm<sup>2</sup>; green-yellow





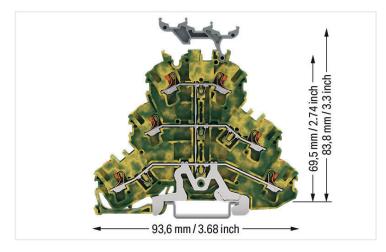

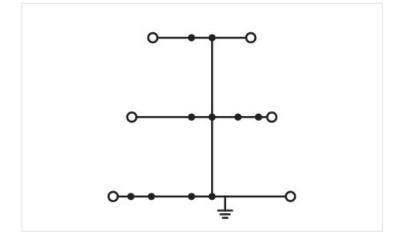

### **Electrical data**

#### Ex information

Reference hazardous areas

See Downloads – Documentation – Additional Information: Technical Section; Technical explanations

connection data	
otal number of connection points	6
Total number of potentials	1
Number of levels Number of jumper slots	3 5
	U U

push-in termination



# Connection 1

Note (conductor cross-section)	Depending on the conductor characteri- stic, a conductor with a smaller cross- section can also be inserted via push-in termination.
Strip length	10 12 mm / 0.39 0.47 inches
Wiring direction	Front-entry wiring

Physical data	
Width	5.2 mm / 0.205 inches
Height	93.6 mm / 3.685 inches
Depth from upper-edge of DIN-rail	83.8 mm / 3.299 inches

Mechanical data	
Potential marking	PE
Mounting type	DIN-35 rail
Marking level	Center/side marking

Material data		
Note (material data)	Information on material data can be found here	
Color	green-yellow	
Material group	1	
Insulation material	Polyamide (PA66)	
Flammability class per UL94	V0	
Fire load	0.345 MJ	
Weight	21.8 g	

Environmental requirements	
Processing temperature	-35 +85 °C
Continuous operating temperature	-60 +105 °C

Commercial data	
ETIM 8.0	EC000901
ETIM 7.0	EC000901
PU (SPU)	50 Pieces
Country of origin VKOrg Germany	DE
GTIN	4066966194074
Customs tariff number VKOrg Germany	85369010000


## Approvals and certificates

Country specific Approvals



Approval	Standard	Certificate name
CSA DEKRA Certification B.V.	C22.2	70173745



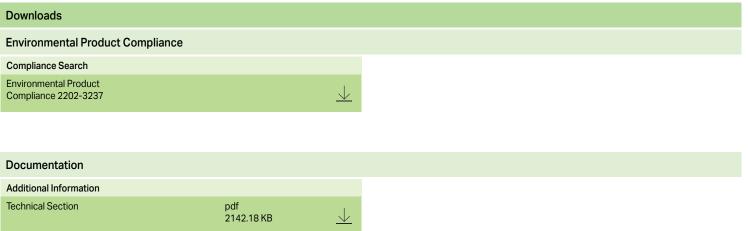

#### Installation notes

**Conductor termination** 









All conductor types at a glance



Push-in termination of solid and ferruled conductors

Push-in termination of solid and ferruled conductors

Insert fine-stranded conductors via operating tool.

Removing all conductors via operating tool.

## Commoning



Insert a push-in type jumper bar and push down until it hits the backstop.

Testing



Testing with a 2 mm Ø test plug (max. 42 V).



Marking





Snapping a marking strip into a marker slot.

Snapping a marking strip into the marker slot.

Subject to changes. Please also observe the further product documentation!