Schottky Barrier Rectifier





Features:

- · Schottky barrier chip
- · Guard ring for over voltage protection
- · Low power loss, high efficiency
- · Low reverse leakage current
- High surge current capability
- · Plastic package has UL flammability classification 94V-0

Mechanical Data:

Case : TO-220AC molded plastic

Terminals : Pure tin plated, lead solderable per MIL-STD-750, method 2026

Polarity : As marked on the body

Weight : 1.9 grams
Mounting Position : Any

Reverse Voltage : 60 to 150 Volts Forward Current : 16 Amperes

Typical Applications

For use in high frequency rectifier of switching mode power supplies, Freewheeling Diode, DC/DC converters or polarity protection application

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristics	Symbol	MBR1660+	MBR16150+	Unit
Max. Recurrent Peak Reverse Voltage	VRRM	60	150	
Max. RMS Voltage	VRMS	42	105	v
Max. DC Blocking Voltage	VDC	60	150	1 1
Max. Average Forward	lF(AV)	16		
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	IFSM	150		A
Max. Forward Voltage at 16A per leg	VF	0.75	0.92	V
Max. DC Reverse Current at $T_J = 25^{\circ}C$ Rated DC Blocking Voltage at $T_J = 125^{\circ}C$	lR	0.15 15	0.1 7.5	mA
Typical Thermal Resistance, Junction to Case	Rejc	2		°C/W
Operating Temperature Range	TJ	-55 to +150		°C
Storage Temperature Range	Тѕтс	-55 to +150		°C

Notes:

- 1. Mounted on 14mm × 14mm pad areas,1oz. FR4 P.C.B
- 2. Free air, mounted on recommended copper pad area
- 3. Pulse test: 300µs pulse width,1% duty cycle
- 4. Pulse test: Pulse width ≦40ms
- 5. The typical data above is for reference only

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro




Schottky Barrier Rectifier





FIG. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

Ratings and Characteristic Curves

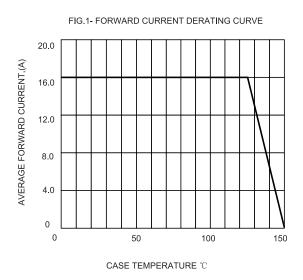

300 250 8.3 ms SINGLE HALF-SINE-WAVE PEAK FORWARD SURGE CURRENT, (JEDEC METHOD) 200 AMPERES 150 100 50 0 50 100 2 5 NUMBER OF CYCLES AT 60Hz

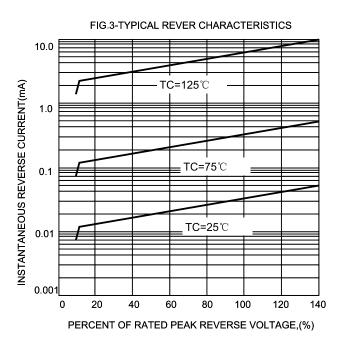

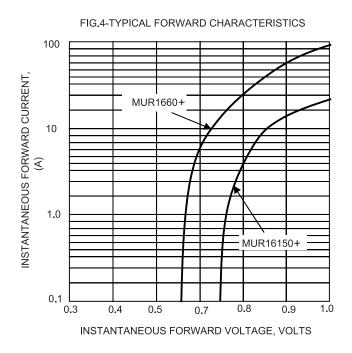

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro




Schottky Barrier Rectifier



Dimensions:

TO-220AC

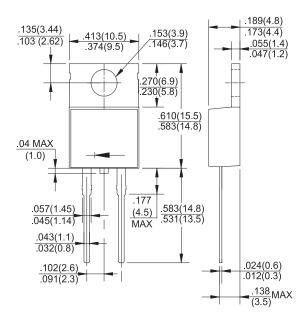

Dimensions: Inches (Millimetres)

Part Number Table

Description	Part Number	
Schottky Barrier Rectifiers	MBR1660+	
	MBR16150+	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

