SMART SENSOR BUSINESS

Leuze electronic

the sensor people



Part no.: 50123001 CML720i-R20-1270.R/PB-M12 Light curtain receiver



Figure can vary

Contents

- Technical data
- · Dimensioned drawings
- Electrical connection
- · Operation and display
- Suitable transmitters
- Part number code
- Notes
- Accessories

Part no.: 50123001 – CML720i-R20-1270.R/PB-M12 – Light curtain receiver

Technical data

Basic data	
Series	720
Operating principle	Throughbeam principle
Device type	Receiver
Contains	Accessories for the use of the BT-2R1
Application	Object measurement
Special design	
Special design	Crossed-beam scanning
opecial design	Diagonal-beam scanning
	Parallel-beam scanning
Optical data	
Operating range	Guaranteed operating range
Operating range	0.3 7 m
Operating range limit	Typical operating range
Operating range limit	0.2 9 m
Measurement field length	1,270 mm
Number of beams	64 Piece(s)
Beam spacing	20 mm
Measurement data	
Minimum object diameter	30 mm
Electrical data	
Protective circuit	Polarity reversal protection Short circuit protected Transient protection
Performance data	
Supply voltage UB 18 30 V , DC	
Residual ripple	0 15 % , From $U_{\rm B}$
Residual ripple	0 15 % , From U_{B} 0 270 mA , The specified values refer to the entire package con-
Residual ripple Open-circuit current	0 15 % , From $U_{\rm B}$ 0 270 mA , The specified values refer to the entire package con-
Residual ripple Open-circuit current Inputs/outputs selectable	0 15 % , From U_B 0 270 mA , The specified values refer to the entire package consisting of transmitter and receiver.
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max.	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s)
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Imput/output 1 Activation/disable delay	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Switching voltage, inputs Type Voltage type, inputs Switching voltage, inputs Switching voltage, inputs Timing	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package consisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V low: ≤4V
Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Imput/output 1 Activation/disable delay	0 15 % , From U _B 0 270 mA , The specified values refer to the entire package con- sisting of transmitter and receiver. 100 mA 6,000 Ω 2 Piece(s) Inputs/outputs selectable DC Typ. U _B / 0 V DC high: ≥6V Iow: ≤4V

Part no.: 50123001 – CML720i-R20-1270.R/PB-M12 – Light curtain receiver

Interface	
Туре	PROFIBUS DP
PROFIBUS DP	Dessee
Function	Process
Service interface	
Туре	IO-Link
IO-Link	
Function	Configuration via software Service
Connection	
Number of connections	2 Piece(s)
Plug outlet	Rear side
Connection 1	
Function	Configuration interface
	Connection to transmitter Signal IN
	Signal OUT Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded
Connection 2	
Function	BUS IN
	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	B-coded
Machanian Jaka	
Mechanical data Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 1,293 mm
Housing material	Metal , Aluminum
Lens cover material	Plastic
Net weight	1,500 g
Housing color	Silver
Type of fastening	Groove mounting
	Via optional mounting device
Operation and display	
Type of display	LED OLED display
Number of LEDs	2 Piece(s)
Type of configuration	Software Teach-in
Operational controls	Membrane keyboard

Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199

Part no.: 50123001 – CML720i-R20-1270.R/PB-M12 – Light curtain receiver


Environmental data			
Ambient temperature, operation	-30 60 °C	-30 60 °C	
Ambient temperature, storage	-40 70 °C		
Certifications			
Degree of protection	IP 65		
Protection class III			
Certifications	c CSA US		
Standards applied	IEC 60947-5-2	IEC 60947-5-2	

Classification	
Customs tariff number	90314990
eCl@ss 8.0	27270910
eCl@ss 9.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549

Dimensioned drawings

All dimensions in millimeters

Part no.: 50123001 – CML720i-R20-1270.R/PB-M12 – Light curtain receiver

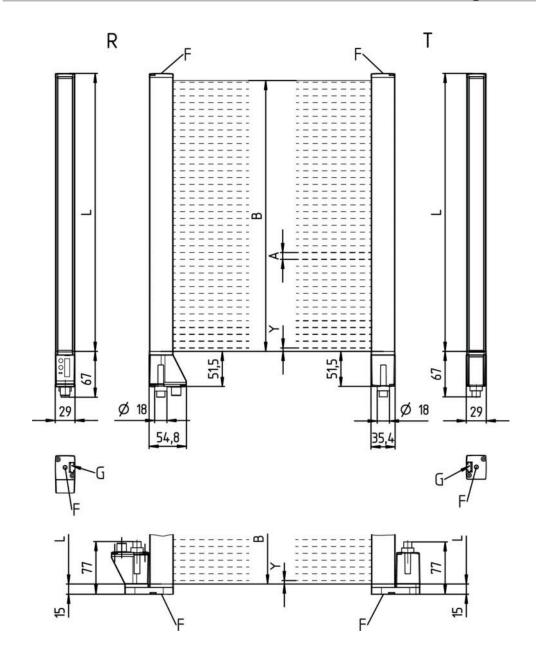

A Beam spacing 20 mm B Measurement field length 1270 mm

F M6 thread

G Fastening groove

L Profile length 1288 mm

T Transmitter

R Receiver

Y 5 mm

Part no.: 50123001 – CML720i-R20-1270.R/PB-M12 – Light curtain receiver



A PWR / SW IN/OUT B BUS IN / OUT

Electrical connection

Connection 1	
Function	Configuration interface Connection to transmitter Signal IN Signal OUT Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded


Pin	Pin assignment
1	V+
2	I/O 1
3	GND
4	IO-Link
5	I/O 2
6	RS 485 Tx+
7	RS 485 Tx+
8	FE/SHIELD



Connection 2		
Function	BUS IN BUS OUT	
Type of connection	Connector	
Thread size	M12	
Туре	Female	
Material	Metal	
No. of pins	5 -pin	
Encoding	B-coded	

Part no.: 50123001 – CML720i-R20-1270.R/PB-M12 – Light curtain receiver

Pin	Pin assignment
1	V+
2	Tx-
3	PB GND
4	Tx+
5	FE/SHIELD



Operation and display

LEDs

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
		Measurement frequency display
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

Suitable transmitters

	Part no.	Designation	Article	Description
5		CML720i- T20-1270.R-M12	Light curtain transmitter	Operating range: 0.3 6 m Connection: Connector, M12, Rear side, 5 -pin

Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle: Measuring light curtain
7XXi	Series: 720i: 720i series 730i: 730i series
Y	Device type: T: transmitter R: receiver
ZZ	Beam spacing: 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment: A: connector outlet, axial R: rear connector outlet

Part no.: 50123001 – CML720i-R20-1270.R/PB-M12 – Light curtain receiver

CCC	Interface: L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment: -PS: Power Setting
EEE	Electrical connection: M12: M12 connector
FFF	-EX: Explosion protection:

Note

A list with all available device types can be found on the Leuze electronic website at www.leuze.com.

Notes

Observe intended use!

- This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

For UL applications:

- For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

Accessories

Connection technology - Connection cables

Part no.	Designation	Article	Description
50132079	KD U-M12-5A- V1-050		Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Open end Shielded: No Cable length: 5,000 mm Sheathing material: PVC

Part no.: 50123001 – CML720i-R20-1270.R/PB-M12 – Light curtain receiver

Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
		K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR
	50123265	K-YPB M12A-5m- M12A-S-PUR	Interconnection cable	Suitable for interface: PROFIBUS DP Connection 1: Connector, M12, Axial, Male, B-coded, 5 -pin Connection 2: Connector, M12, Axial, Female, B-coded, 5 -pin Connection 3: Connector, M12, Axial, Male, B-coded, 5 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 250 mm Sheathing material: PUR

Mounting technology - Mounting brackets

Part no.	Designation	Article	Description
50142900	BT 700M.5-2SET	Mounting device set	Contains: 2x mounting brackets, 1 teach template, 4 M6 x 10 screws Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
ęł.	429046	BT-2R1	set	Contains: 2x BT-R swivel mount, 1 cylinder for mounting on the light curtain Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

Services

Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.

Part no.: 50123001 – CML720i-R20-1270.R/PB-M12 – Light curtain receiver

Part no.	Designation	Article	Description
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.

Ν	ote
	010

A list with all available accessories can be found on the Leuze electronic website in the Download tab of the article detailed page.