

4mm Golded Banana Jack w/ 14.5mm Round Nut M4 Threaded Stud & Hex Nut

multicomp PRO

**RoHS
Compliant**




Applications

General purpose electric and electronic testing, controlling and measuring.

Specifications

Connector Type	: 4mm Banana Jack
Connector Mounting	: Panel Mount
Termination Type	: M4 Threaded Stud & Hex Nut
Voltage Rating	: CAT III 1000V
Current Rating	: 36A
Resistor	: < 12mΩ
Contact Material	: Brass, Gold Nickel Plating
Insulators Material	: Polyamide
Terminal Dimension	: M4 × 10mm
Operating Temperature Range	: -20°C to +80°C

Diagram

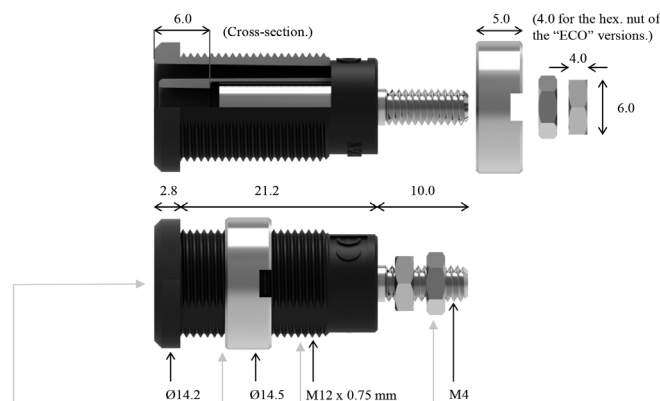

The 4 mm banana female connection complies with the 4 mm banana plugs of the worldwide most famous manufacturers.

Round nut to attach the socket to the panel. The "ECO" versions provide a hexagonal nut instead of the round nut. The benefit of the round nut is that it does not need a lot of place to tighten.

Flat surface for anti-rotation purpose (if needed).

CE
European Union marking.

Terminal : M4 threaded stud and 2 M4 nuts (complying with both lead-tin and lead-free tin soldering and 150 W maximum soldering iron). Screwing by open-end spanner SW6 (6 mm). Tightening torque, 0.3 N.m maxi. (at 20 °C).

Dimensions : Millimetres

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO

**4mm Golded Banana Jack w/ 14.5mm Round Nut
M4 Threaded Stud & Hex Nut**



<p>Electrical Safety</p> <p>1000V CAT II 1000V CAT III 600V CAT IV</p>	<p>The design of the socket front face meets the requirements of EN / IEC 61010-031:2015 and the socket design is compatible with EN / IEC 61010-1:2010 for reinforced insulation at 1000V CAT II / 1000V CAT III / 600V CAT IV and 25A (at 40°C). These specifications come from the creepage distances, clearances, solid insulation, and CTI of the socket. And the considered building and implementation specifications are: insulating panel; pollution degree of the micro-environment, 1 or 2; relative humidity of the micro-environment, 80% maximum for temperatures up to 31°C decreasing linearly to 50% relative humidity at 40°C; temperature range of the micro-environment, +5°C to +40°C; indoor use; and altitude, 2000m maximum. IP2X (touch-protected) protection on the front face according to EN / IEC 60529.</p>
<p>Conformity</p>	<p>European Directive "Low Voltage Directive" 2014/35/EU. European Directive "RoHS" 2011/65/EU. European REACH regulation n°1907 / 2006. International / European standard EN / IEC 61010-031:2015. International / European standard EN / IEC 61010-1:2010. International / European standard EN / IEC 60529.</p>
<p>Environment</p>	<p>"RoHS" compliant, Pb ≤ 4 % in conductor, Pb ≤ 0.1 % in insulator, Hg ≤ 0.1 %, Cr VI ≤ 0.1 %, Cd ≤ 0.01 %, PBB ≤ 0.1 %, and PBDE ≤ 0.1 %. REACH compliant, no substances from the candidate list of SVHC for authorisation at mass concentrations greater than 0.1 %</p>

Part Number Table

Description	Insulator Colour	Part Number
4mm Gold Plated Banana Jack w/ 14.5mm Round Nut, M4 Threaded Stud & Hex Nut, Panel, 1000V, 36A	White	72-14152
	Brown	72-14156
	Yellow	72-14160
	Yellow/Green	72-14162
	Red	72-14166
	Green	72-14168
	Purple	72-14170

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

