Throughbeam photoelectric laser sensors








0 ... 150 m




- Throughbeam photoelectric laser sensor with high performance reserve in red light
- 4-way LED indicator for fast status display and exact alignment
- Activation input for function testing and linking several optical axes
- Connection via M12 connector

Dimensioned drawing

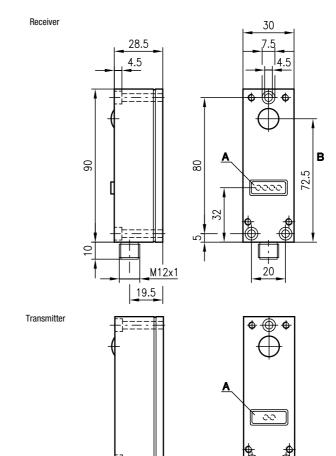

- A Indicator diodes
- B Optical axis

Electrical connection

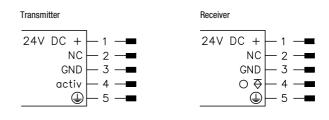









Accessories:

(available separately)

- Mounting system (BT 64)
- M12 connectors (KD ...)
- Ready-made cables (K-D M12 ...)

Specifications

Optical data

Typ. operating range limit 1) 0 ... 150m Operating range 2) 0 ... 120m

divergent (typical 0.11°) Light beam propagation Light source Wavelength laser (modulated light) 655nm (visible red light)

Timing

Switching frequency 100 Hz Response time Delay before start-up 5ms < 100ms

Electrical data

24VDC ± 20% Operating voltage U_B Residual ripple \leq 15% of U_B Bias_current

Transmitter ≤ 35 mA Receiver ≤ 40mA Switching output PNP transistor light switching ≥ (U_B-2V)/≤ 2V max. 100 mA Function characteristics Signal voltage high/low Output current

Indicators

Transmitter

Green LED ready transmitter active LED yellow

Receiver

switching state and alignment aid 4-fold LED red

Function characteristics no signal - output=low

number of illuminating LEDs as indicator LEDs on:

for receiving level - output=high

Mechanical data

Housing diecast zinc glass 430g Weight

Connection type M12 connector, stainless steel, 5-pin

Environmental data

Ambient temp. (operation/storage) Protective circuit 3) -20°C ... +40°C/-40°C ... +70°C

1, 2, 3 VDE safety class I IP 65 Protection class

2 (acc. to EN 60825-1) Laser class

Standards applied IEC 60947-5-2

Options

Activation input active

≥ 8V/≤ 2V or not connected Transmitter active/not active

Activation/disable delay ≤ 0,5ms

Typ. operating range limit: max. attainable range without performance reserve

Operating range: recommended range with performance reserve

1=transient protection, 2=polarity reversal protection, 3=short-circuit protection for all outputs

Order guide

Transmitter and receiver	LSRL 64/4.8 L	
Transmitter	LSRL 64/2.8 Se-L	50080151
Receiver	LSR 64/4 E-L	50080150

Designation

Tables

Diagrams

Remarks

Operate in accordance with intended use!

- ♦ This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons. ♥ Only use the product in accordance with the intended use.
- Optimal performance reserve is achieved when all four LEDs illuminate.
- The first red LED indicates the state of the switching output.

LSRL 64/4.8 L - 05 2014/08

Part No.

Throughbeam photoelectric laser sensors

Laser safety notices



ATTENTION. LASER RADIATION - LASER CLASS 2

Never look directly into the beam!

The device fulfills the EN 60825-1:2008-05 (IEC 60825-1:2007) safety regulations for a product in **laser class 2** as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to "Laser Notice No. 50" from June 24th, 2007.


- Never look directly into the laser beam or in the direction of reflecting laser beams!
 If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- ♥ Do not point the laser beam of the device at persons!
- 🔖 Intercept the laser beam with an opaque, non-reflective object if the laser beam is accidentally directed towards a person.
- \$\text{\text{When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!}
- CAUTION! Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous light exposure.
 - The use of optical instruments or devices (e.g., magnifying glasses, binoculars) with the product will increase eye hazard.
- Adhere to the applicable legal and local regulations regarding protection from laser beams acc. to EN 60825 (IEC 60825) in its latest version.
- - There are no user-serviceable parts inside the device.
 - Repairs must only be performed by Leuze electronic GmbH + Co. KG.

NOTICE

Affix laser information and warning signs!

Laser information and warning signs are affixed to the device (see ①). In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages (see ②).

- Affix the laser information sheet with the language appropriate for the place of use to the device. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" notice.
- Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
 - Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

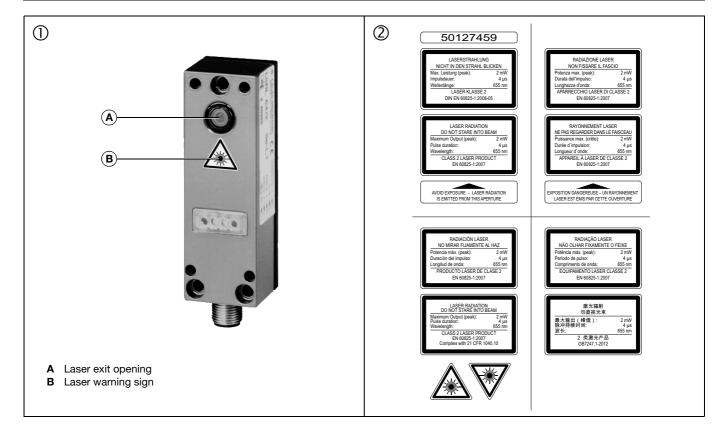

LSRL 64/4.8 L - 05 2014/08