

Overload relay 4...16 A for motor protection Size S00, Class 10E  
 Contactor mounting Main circuit: Spring-type terminal Auxiliary  
 circuit: Spring-type terminal Manual-Automatic-Reset



Product brand name	SIRIUS
Product designation	solid-state overload relay
Product type designation	3RB3

**General technical data**

Size of overload relay	S00
Size of contactor can be combined company-specific	S00
Power loss [W] total typical	1.1 W
Insulation voltage with degree of pollution 3 rated value	690 V
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
<ul style="list-style-type: none"> <li>in networks with grounded star point between auxiliary and auxiliary circuit</li> </ul>	300 V
<ul style="list-style-type: none"> <li>in networks with grounded star point between auxiliary and auxiliary circuit</li> </ul>	300 V
<ul style="list-style-type: none"> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	600 V
<ul style="list-style-type: none"> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	690 V
Protection class IP	

<ul style="list-style-type: none"> <li>• on the front</li> <li>• of the terminal</li> </ul>	IP20 IP20
<b>Shock resistance</b> <ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-27</li> </ul>	15g / 11 ms 15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 9g / 11 ms
<b>Thermal current</b>	16 A
<b>Recovery time</b> <ul style="list-style-type: none"> <li>• after overload trip with automatic reset typical</li> <li>• after overload trip with remote-reset</li> <li>• after overload trip with manual reset</li> </ul>	3 min 0 min 0 min
<b>Type of protection</b>	II (2) G [Ex e] [Ex d] [Ex px] II (2) D [Ex t] [Ex p]
Certificate of suitability relating to ATEX	PTB 09 ATEX 3001
<b>Protection against electrical shock</b>	finger-safe
<b>Reference code acc. to DIN EN 81346-2</b>	F

### Ambient conditions

<b>Installation altitude at height above sea level</b> <ul style="list-style-type: none"> <li>• maximum</li> </ul>	2 000 m
<b>Ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	-25 ... +60 °C -40 ... +80 °C -40 ... +80 °C
<b>Temperature compensation</b>	-25 ... +60 °C
Relative humidity during operation	10 ... 95 %

### Main circuit

<b>Number of poles for main current circuit</b>	3
<b>Adjustable pick-up value current of the current-dependent overload release</b>	4 ... 16 A
<b>Operating voltage</b> <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> </ul>	690 V 690 V
<b>Operating frequency rated value</b>	50 ... 60 Hz
<b>Operating current rated value</b>	16 A
<b>Operating power</b> <ul style="list-style-type: none"> <li>• for three-phase motors at 400 V at 50 Hz</li> <li>• for AC motors at 500 V at 50 Hz</li> <li>• for AC motors at 690 V at 50 Hz</li> </ul>	2.2 ... 7.5 kW 2.2 ... 7.5 kW 3 ... 11 kW

### Auxiliary circuit

<b>Design of the auxiliary switch</b>	integrated
<b>Number of NC contacts for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• Note</li> </ul>	1 for contactor disconnection
<b>Number of NO contacts for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• Note</li> </ul>	1 for message "tripped"

<b>Number of CO contacts</b>	
• for auxiliary contacts	0
<b>Operating current of auxiliary contacts at AC-15</b>	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
<b>Operating current of auxiliary contacts at DC-13</b>	
• at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A

### Protective and monitoring functions

<b>Trip class</b>	CLASS 10E
<b>Design of the overload release</b>	electronic

### UL/CSA ratings

<b>Full-load current (FLA) for three-phase AC motor</b>	
• at 480 V rated value	16 A
• at 600 V rated value	16 A
<b>Contact rating of auxiliary contacts according to UL</b>	B600 / R300

### Short-circuit protection

<b>Design of the fuse link</b>	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG: 50 A, RK5: 60 A
— with type of assignment 2 required	gG: 50 A, J: 60 A
• for short-circuit protection of the auxiliary switch required	fuse gG: 6 A

### Installation/ mounting/ dimensions

<b>Mounting position</b>	any
<b>Height</b>	72 mm
<b>Width</b>	45 mm
<b>Depth</b>	90 mm
<b>Required spacing</b>	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm

— at the side	0 mm
• for grounded parts	
— forwards	6 mm
— Backwards	0 mm
— upwards	0 mm
— at the side	6 mm
— downwards	0 mm
• for live parts	
— forwards	6 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	6 mm

## Connections/Terminals

<b>Product function</b>	Yes
<ul style="list-style-type: none"> <li>removable terminal for auxiliary and control circuit</li> </ul>	
<b>Type of electrical connection</b>	spring-loaded terminals
<ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control current circuit</li> </ul>	spring-loaded terminals
<b>Arrangement of electrical connectors for main current circuit</b>	Top and bottom
<b>Type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>at AWG conductors for main contacts</li> </ul>	1x (0.5 ... 4 mm <sup>2</sup> ) 1x (0,5 ... 4 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (20 ... 12)
<b>Type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>at AWG conductors for auxiliary contacts</li> </ul>	2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (0,25 ... 1,5 mm <sup>2</sup> ) 2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (0.25 ... 1.5 mm <sup>2</sup> ) 1x (24 ... 16), 2x (24 ... 16)
<b>Design of screwdriver shaft</b>	Diameter 5 to 6 mm
<b>Size of the screwdriver tip</b>	Pozidriv PZ 2

## Communication/ Protocol

Type of voltage supply via input/output link master	No
---	----

### Electromagnetic compatibility





<b>Conducted interference</b>	
<ul style="list-style-type: none"> <li>• due to burst acc. to IEC 61000-4-4</li> </ul>	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
<ul style="list-style-type: none"> <li>• due to conductor-earth surge acc. to IEC 61000-4-5</li> </ul>	2 kV (line to earth) corresponds to degree of severity 3
<ul style="list-style-type: none"> <li>• due to conductor-conductor surge acc. to IEC 61000-4-5</li> </ul>	1 kV (line to line) corresponds to degree of severity 3
<ul style="list-style-type: none"> <li>• due to high-frequency radiation acc. to IEC 61000-4-6</li> </ul>	10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge





### Display

<b>Display version</b>	
<ul style="list-style-type: none"> <li>• for switching status</li> </ul>	Slide switch

### Certificates/approvals

<b>General Product Approval</b>	<b>EMC</b>	<b>For use in hazardous locations</b>
 CCC	 CSA	 UL
 EAC	 C-Tick	 ATEX

<b>Declaration of Conformity</b>	<b>Test Certificates</b>	<b>Marine / Shipping</b>
 EG-Konf.	<a href="#">Special Test Certificate</a>	<a href="#">Type Test Certificates/Test Report</a>
		 ABS
		 BUREAU VERITAS
		 LRS

<b>Marine / Shipping</b>	<b>other</b>
 PRS	<a href="#">Confirmation</a>
 RINA	
 RMRS	
 DNV-GL	

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3016-1TE0>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3016-1TE0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3016-1TE0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB3016-1TE0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3016-1TE0&lang=en)


**Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current**


<https://support.industry.siemens.com/cs/ww/en/ps/3RB3016-1TE0/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3016-1TE0&objecttype=14&gridview=view1>

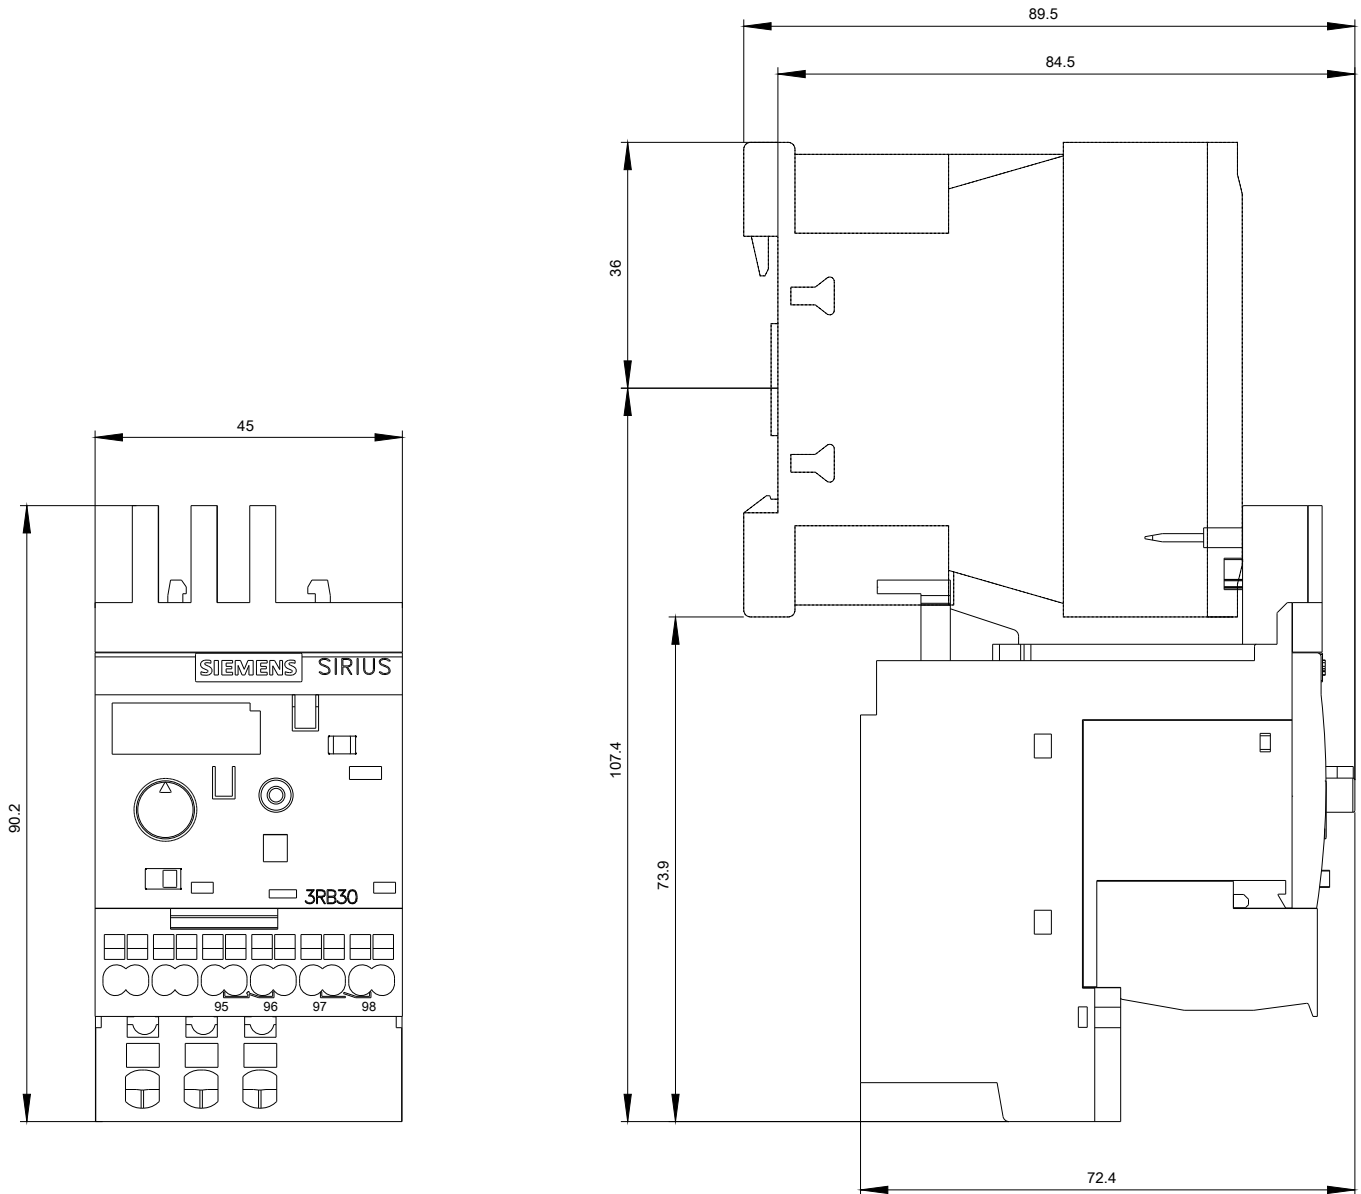

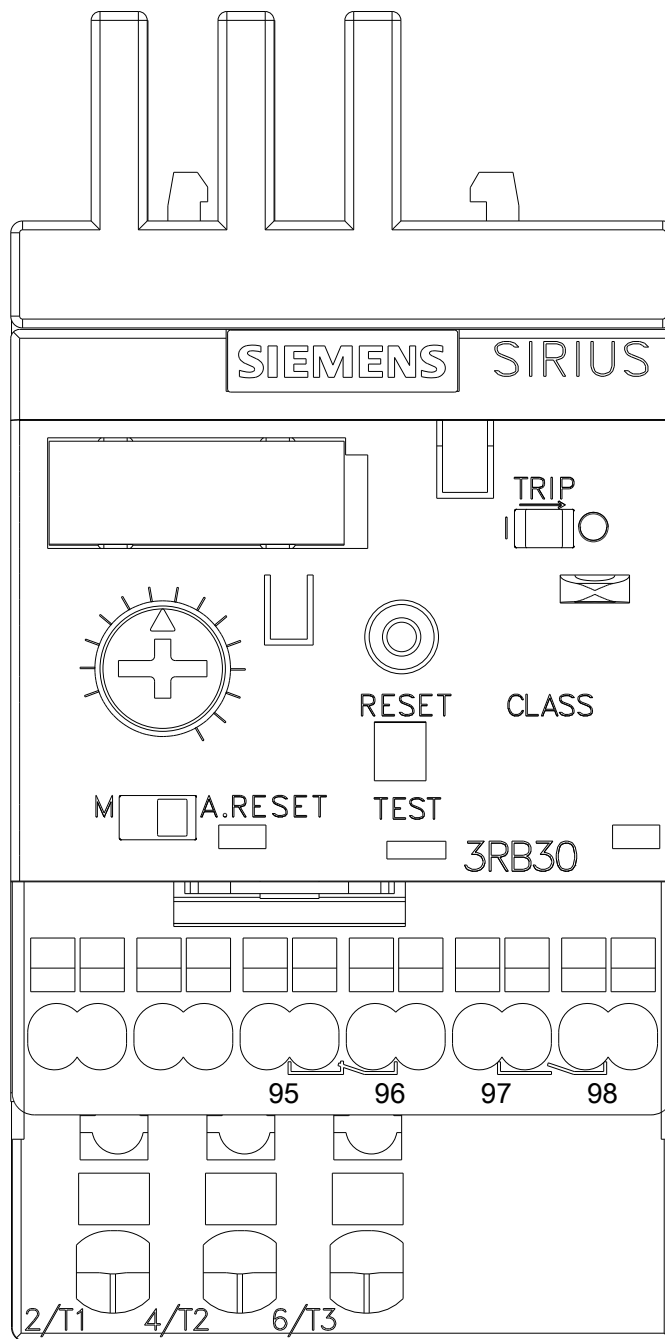

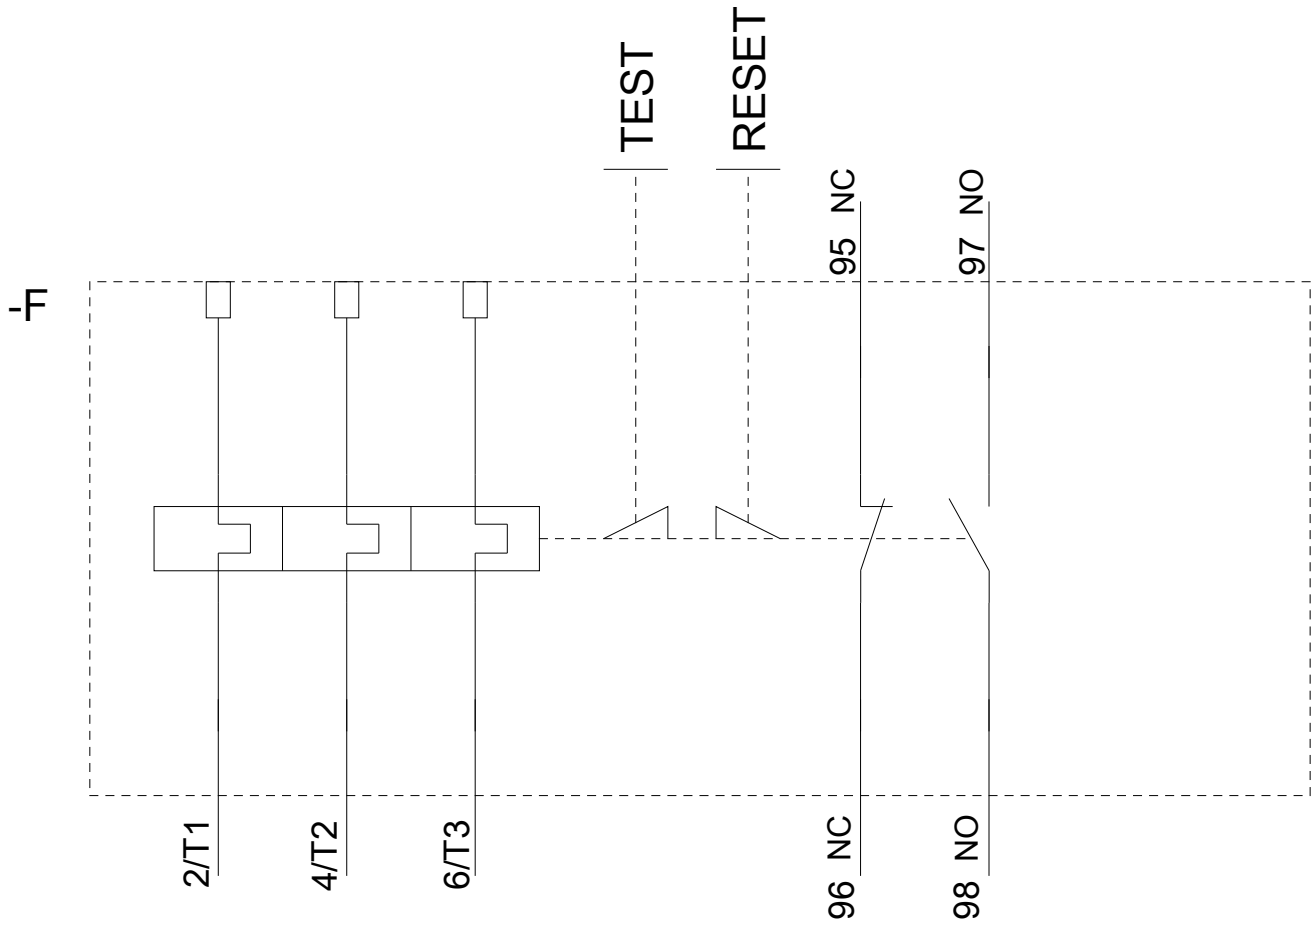

last modified:

12/13/2018