





Description:

This is a Silicon NPN transistor in a TO-39 type case designed primarily for amplifier and switching applications. This device features high breakdown voltage low leakage current, low capacity, and beta useful over an extremely wide current range.

**RoHS
Compliant**

NPN

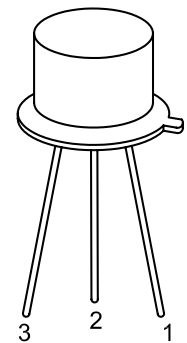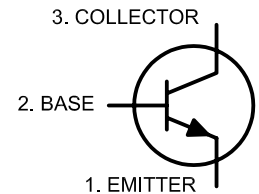

Absolute Maximum Ratings:

Characteristic	Symbol	Rating
Collector-Base Voltage	V_{CB0}	140V
Collector-Emitter Voltage	V_{CEO}	80V
Emitter - Base Voltage	V_{EBO}	7V
Continuous Collector Current	I_C	1A
Total Device Dissipation ($T_c = +25^\circ\text{C}$) Derate above 25°C	P_D	800mW 4.6mW/ $^\circ\text{C}$
Total Device Dissipation ($T_c = +25^\circ\text{C}$) Derate above 25°C	P_D	5W 28.6mW/ $^\circ\text{C}$
Operating Junction Temperature Range	T_J	-65°C to $+200^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65°C to $+200^\circ\text{C}$
Thermal Resistance, Junction-to-Case	R_{thJC}	16.5 $^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Ambient	R_{thJA}	89.5 $^\circ\text{C}/\text{W}$
Lead Temperature (During Soldering, 1/16" from case, 60sec max.)	T_L	300 $^\circ\text{C}$

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ Unless otherwise specified)


Parameter	Symbol	Test Conditions	Min.	Max.	Unit.
OFF Characteristics					
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 30\text{mA}, I_B = 0$	80	-	V
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 100\mu\text{A}, I_E = 0$	140	-	
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 100\mu\text{A}, I_C = 0$	7	-	
Collector-Cut-Off Current	I_{CBO}	$V_{CB} = 90\text{V}, I_E = 0$	-	0.01	μA
		$V_{CB} = 90\text{V}, I_E = 0, T_A = +150^\circ\text{C}$	-	10	
Emitter Cut-Off Current	I_{EBO}	$V_{BE} = 5\text{V}, I_C = 0$	-	0.01	
On Characteristics (Note 1)					
DC Current Gain	h_{FE}	$V_{CE} = 10\text{V}, I_C = 0.1\text{mA}$	50	-	-
		$V_{CE} = 10\text{V}, I_C = 10\text{mA}$	90	-	-
		$V_{CE} = 10\text{V}, I_C = 150\text{mA}$	100	300	-

Parameter	Symbol	Test Conditions	Min.	Max.	Unit.
DC Current Gain	h_{FE}	$V_{CE} = 10V, I_C = 150mA, T_A = -55^\circ C$	40	-	-
		$V_{CE} = 10V, I_C = 500mA$	50	-	-
		$V_{CE} = 10V, I_C = 1A$	15	-	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 150mA, I_B = 15mA$	-	0.2	V
		$I_C = 150mA, I_B = 50mA$	-	0.5	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 150mA, I_B = 15mA$	-	1.1	V

Small-Signal Characteristics

Current Gain-Bandwidth Product	f_T	$V_{CE} = 10V, I_C = 50mA, f = 20MHz$	100	400	MHz
Output Capacitance	C_{obo}	$V_{CB} = 10V, I_E = 0, f = 1MHz$	-	12	pF
Input Capacitance	C_{ibo}	$V_{BE} = 500mV, I_C = 0, f = 1MHz$	-	60	pF
Small-Signal Current Gain	h_{fe}	$V_{CE} = 5V, I_C = 1mA, f = 1kHz$	80	400	-
Collector-Base Time Constant	$rb'CC$	$V_{CE} = 10V, I_E = 10mA, f = 1kHz$	-	400	ps
Noise Figure	NF	$V_{CE} = 10V, I_C = 100 \mu A, f = kHz, R_s = 1k\Omega$	-	4	dB

Note 1. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 1\%$

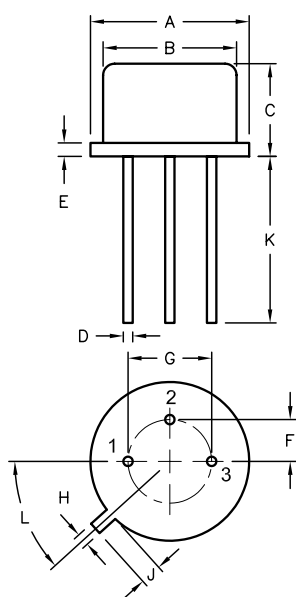

1. EMITTER
2. BASE
3. COLLECTOR

Dimensions	A	B	C	D	E	F	G	H	J	K	L
Min.	8.5	7.74	6.09	0.4	-	2.41	4.82	0.71	0.73	12.7	42°
Max.	9.39	8.50	6.6	0.53	0.88	2.66	5.33	0.86	1.02	-	48°

Dimensions : Millimetres

Part Number Table

Description	Part Number
Bipolar Transistor, NPN, 1A, 80V, TO-39	2N3019

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.