

Angle 3 click

PID: MIKROE-2755

Angle 3 click carries the [AK7451](#), a magnetic rotational angle sensor. The click is designed to run on a 5V power supply. It communicates with the target microcontroller over SPI interface, with additional functionality provided by the INT pin on the mikroBUS™ line.



Angle 3 click can be used for non-contact rotation angle measurement.

AK7451 features


The AK7451 is a magnetic rotational angle sensor with a built-in Hall element.

By detecting the magnetic field vector parallel to the IC surface, the AK7451 outputs the absolute angular position of the magnet and the relative angular position.

Through the transverse magnetic field detection method, using a magnetic flux concentrator, the AK7451 has excellent axial misalignment immunity.

How the click works

The host microcontroller sends the request for measuring the angle rotation via the SPI interface. The AK7451 sensor responds with the measured data.

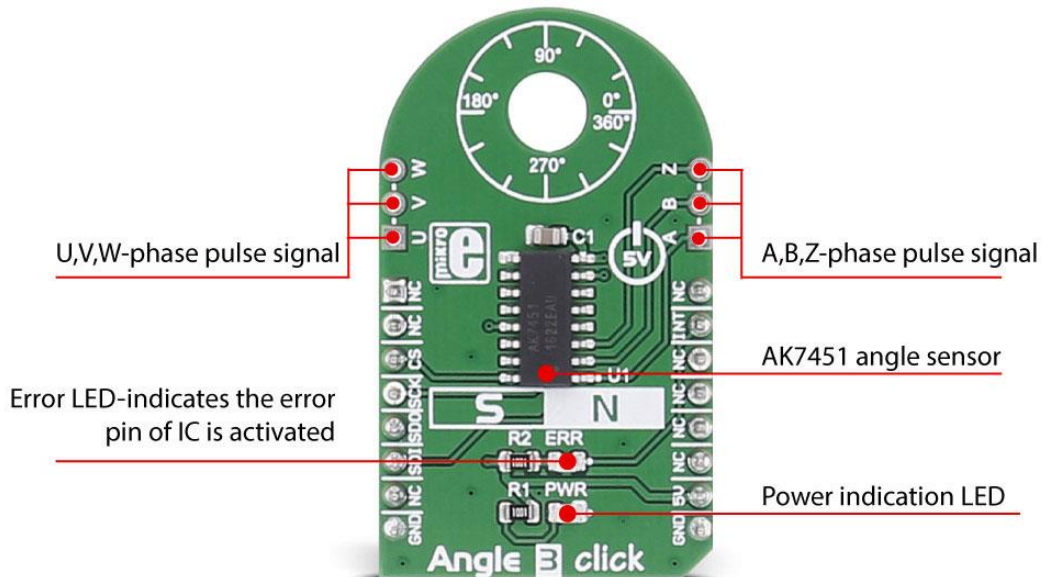


There are 3 output pins on board (A, B, Z) where the IC outputs pulses for the encoder feature and the 3 output pins (U, V, W) where the IC outputs pulses for the BLDC motor drive.

Specifications

Type	Magnetic
Applications	Suitable to various motor drive and encoder applications
On-board modules	AK7451 zero latency angle sensor
Key Features	12bit angle resolution, less than ± 0.6 deg. angle accuracy at 25 °C, maximum tracking speed : 333 rps (20,000 rpm)
Interface	SPI
Input Voltage	5V
Click board size	M (42.9 x 25.4 mm)

Pinout diagram

This table shows how the pinout on **Angle 3 click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	NC	
	NC	2	RST	INT	15	INT	Interrupt
Chip select	CS	3	CS	TX	14	NC	
SPI clock	SCK	4	SCK	RX	13	NC	
Slave data out for SPI	SDO	5	MISO	SCL	12	NC	
Slave data in for SPI	SDI	6	MOSI	SDA	11	NC	
	NC	7	3.3V	5V	10	+5V	Power supply
Ground	GND	8	GND	GND	9	GND	Ground