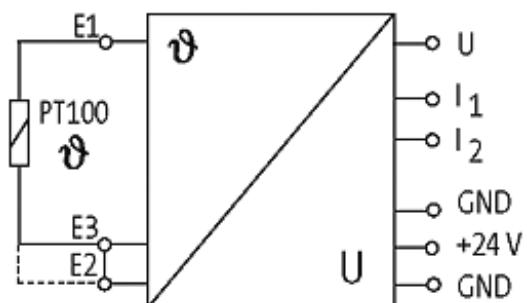



**MIRO TEMP. CONVERTER PT100 - 2 /3-LEAD METHOD**

IN: 0 °C..+600 °C - OUT: 0..10 V / (0)4..20 mA

INPUT: 0...600 °C

Spring clamp terminals

**Link to Product****Illustration**

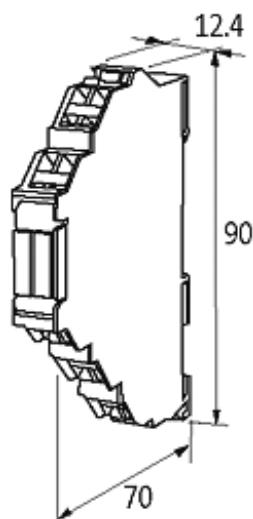

Product may differ from Image

### Technical Data

Operating voltage	24 V DC (18...30 V DC), smoothed
Operating current	max. 80 mA
Cable resistance (without PT100)	max. 100 Ohm (3-wire technology)
Output signals at 0...10 V DC	max. 25 mA, overload protected
Output signals at 4...20 V mA	max. 500 Ohm RL
Output signals at 0...20 mA	max. 500 Ohm RL
Tolerance	±1 % from end value

### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C
Dimensions H × W × D	80×12.4×70 mm

### Description

Functional description	The Murrelektronik temperature converter module works in conjunction with a temperature sensor PT100 (IEC 751/EN 60751) and converts the temperature into a standard signal format of (0...10 V, 4...20 mA, 0...20 mA). The MTW modules supply a constant cure
------------------------	--

### Commercial data

country of origin	CZ
customs tariff number	85437090
minimum order quantity	1