


### Attractive rugged rocker switch

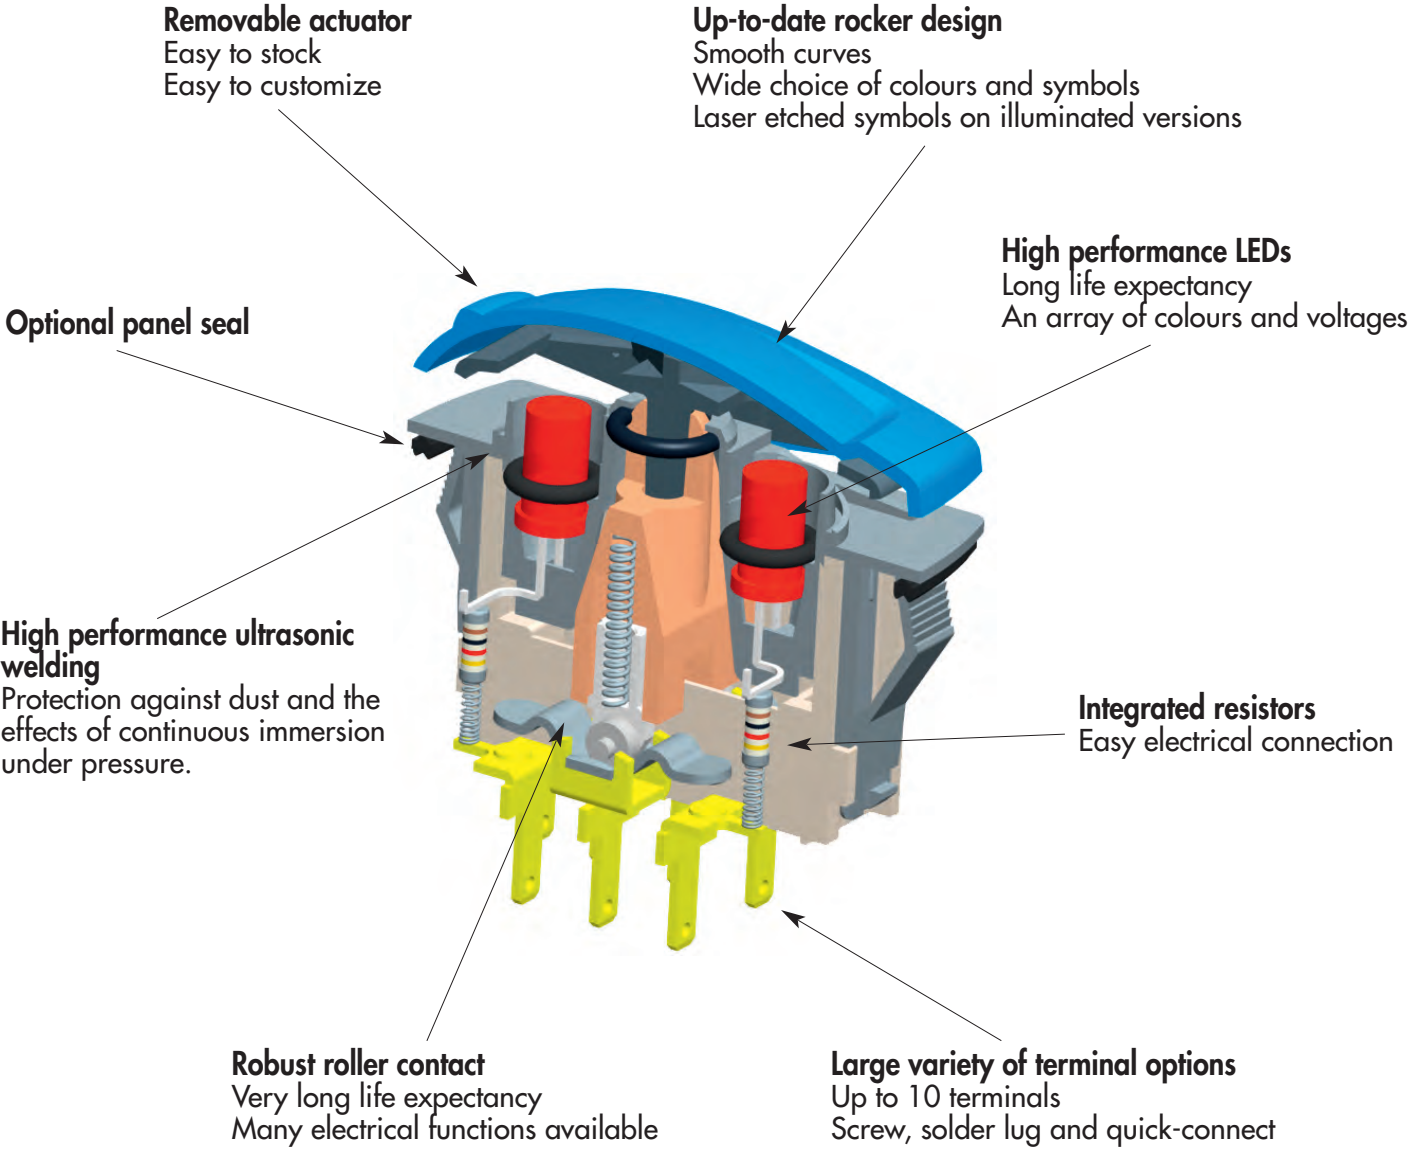

APEM will be happy to develop custom product solutions. Please contact us with your requirements.

# KR series

## Power rocker switches

### Specifications



- Unique rocker design
- Wide choice of colours
- Laser etched symbols
- Illuminated or non-illuminated
- Optionally sealed to IP68


#### ELECTRICAL SPECIFICATIONS

- Current/voltage rating with resistive load :
  - Silver plated contacts (A) : 5A 24VDC, 100.000 cycles
  - 10A 24VDC, 10.000 cycles (terminals 6.35 x 0.8 only)
  - Gold plated contacts (D) : 20mA 12V, 150.000 cycles
- Current/voltage rating with lamp load - silver contacts (A) :
  - functions 1 & 6 : 100W 24VDC, 10.000 cycles
  - other functions : 60W 24VDC, 10.000 cycles
- Initial contact resistance : 10 mΩ max.
- Insulation resistance : 1.000 MΩ min. at 500VDC
- Dielectric strength : 2.000 Vrms 50 Hz min. between terminals
- Mechanical life : 150.000 cycles min.

#### ENVIRONMENTAL SPECIFICATIONS

- Degree of protection of sealed versions : frontal sealing to IP68 acc. to IEC 60529 (submersion under 1 meter of water for more than 30 minutes)
- Salt spray resistance : 96 hours according to IEC 512-6, test 11f
- Vibration resistance : 10-500 Hz / 10 g per IEC 60068-2-6
- Operating temperature : -40°C to +85°C

#### DIMENSIONS

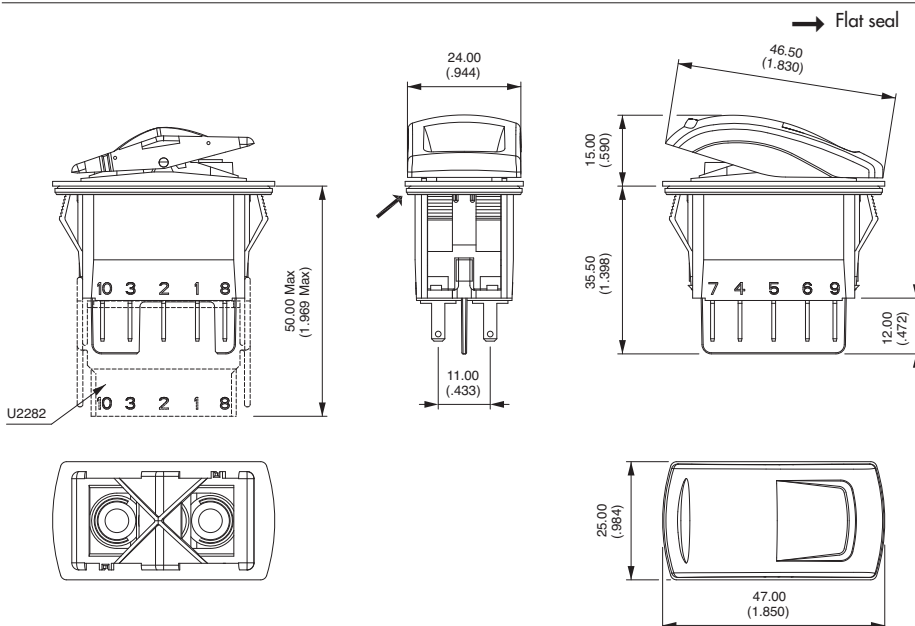

#### MATERIALS

- Case : PA 6-6
- Actuator : ABS
- Bezel : PA 6-6
- Contacts & terminals : brass, solid silver grain, silver plated (A) or brass, solid silver grain, gold plated (D)
- Contact roller : brass, nickel plated

#### SEALING

Sealing is optional.  
To order a sealed product, complete the appropriate box of ordering format on the following pages.



Packaging unit : 40 pieces

**Dimensions** : First dimensions are in mm while inches are shown as bracketed numbers.

### HOW TO ORDER

- To order a complete product, fill in all the boxes of the following order guide.
- To order case only (without actuator), finish your order number with the LED wiring code.
- To order actuator only (without case), begin the order number with code KRR, then follow the order format from "actuator type" until the end of the options.

### CASE + LEADS

<b>KR</b>							Side A	Side B																																																																				
<b>SERIES</b>	<b>Electrical functions</b>						<b>Contacts</b>	<b>Sealing</b>	<b>LEDS</b>	<b>Wiring</b>																																																																		
<b>Poles</b>	<table border="0"> <tr> <td>1</td><td>ON</td><td>-</td><td>OFF</td></tr> <tr> <td>4</td><td>ON</td><td>ON</td><td>ON</td></tr> <tr> <td>4-1R</td><td>ON</td><td>ON</td><td>MOM</td></tr> <tr> <td>5</td><td>MOM</td><td>-</td><td>ON</td></tr> <tr> <td>6</td><td>ON</td><td>-</td><td>ON</td></tr> <tr> <td>7</td><td>MOM</td><td>OFF</td><td>MOM</td></tr> <tr> <td>8</td><td>ON</td><td>OFF</td><td>MOM</td></tr> <tr> <td>9</td><td>ON</td><td>OFF</td><td>ON</td></tr> </table> <p><b>Function 1</b> only for 6-terminal versions.  <b>Functions 5 and 6</b> cannot be combined with "H" wiring.</p>						1	ON	-	OFF	4	ON	ON	ON	4-1R	ON	ON	MOM	5	MOM	-	ON	6	ON	-	ON	7	MOM	OFF	MOM	8	ON	OFF	MOM	9	ON	OFF	ON	A Silver D Gold plated	X No K Yes	<table border="0"> <tr><td>X</td><td>None</td></tr> <tr><td>A</td><td>LED 6V red</td></tr> <tr><td>B</td><td>LED 6V green</td></tr> <tr><td>C</td><td>LED 6V yellow</td></tr> <tr><td>M</td><td>LED 6V blue</td></tr> <tr><td>R</td><td>LED 6V white</td></tr> <tr><td>D</td><td>LED 12V red</td></tr> <tr><td>E</td><td>LED 12V green</td></tr> <tr><td>F</td><td>LED 12V yellow</td></tr> <tr><td>N</td><td>LED 12V blue</td></tr> <tr><td>S</td><td>LED 12V white</td></tr> <tr><td>J</td><td>LED 24V red</td></tr> <tr><td>K</td><td>LED 24V green</td></tr> <tr><td>L</td><td>LED 24V yellow</td></tr> <tr><td>P</td><td>LED 24V blue</td></tr> <tr><td>T</td><td>LED 24V white</td></tr> <tr><td>...</td><td></td></tr> </table>	X	None	A	LED 6V red	B	LED 6V green	C	LED 6V yellow	M	LED 6V blue	R	LED 6V white	D	LED 12V red	E	LED 12V green	F	LED 12V yellow	N	LED 12V blue	S	LED 12V white	J	LED 24V red	K	LED 24V green	L	LED 24V yellow	P	LED 24V blue	T	LED 24V white	...		See following pages.
1							ON	-	OFF																																																																			
4	ON	ON	ON																																																																									
4-1R	ON	ON	MOM																																																																									
5	MOM	-	ON																																																																									
6	ON	-	ON																																																																									
7	MOM	OFF	MOM																																																																									
8	ON	OFF	MOM																																																																									
9	ON	OFF	ON																																																																									
X	None																																																																											
A	LED 6V red																																																																											
B	LED 6V green																																																																											
C	LED 6V yellow																																																																											
M	LED 6V blue																																																																											
R	LED 6V white																																																																											
D	LED 12V red																																																																											
E	LED 12V green																																																																											
F	LED 12V yellow																																																																											
N	LED 12V blue																																																																											
S	LED 12V white																																																																											
J	LED 24V red																																																																											
K	LED 24V green																																																																											
L	LED 24V yellow																																																																											
P	LED 24V blue																																																																											
T	LED 24V white																																																																											
...																																																																												
3 Single pole 4 Double pole	<b>Terminals</b>	<b>Terminals (continued)</b>																																																																										
	<p><b>Terminals</b></p> <p><b>Screw</b></p> <p>0 6 terminals with barrier</p> <p><b>Solder lug/quick-connect</b></p> <p>2 6 terminals with barrier</p> <p>4 6 terminals w/o barrier</p> <p>A 10 term. with barrier</p> <p>B 10 term. w/o barrier</p> <p>C 10 terminals for use with connector U2292</p> <p><b>Quick-connect 6,35x0,8</b></p> <p>3 6 terminals with barrier</p>	<p><b>Quick-connect 6,35x0,8</b></p> <p>5 6 terminals w/o barrier</p> <p>D 10 term. with barrier</p> <p>E 10 term. w/o barrier</p> <p>F 10 term. for use with connector U2292</p> <p><b>Quick-connect 2,8x0,8</b></p> <p>G 10 term. with barrier</p> <p>H 10 term. w/o barrier</p> <p>J 10 terminals for use with connector U2282</p>																																																																										

### ACTUATOR

<b>Type</b>	<b>Colour</b>
1 For non-illuminated application 2 For illuminated application	1 Blue 1/4 Dark blue 2 Black 3 Green 4 Grey 5 Yellow 6 Red 7 Ivory 9 Orange A Aluminium bright

### ACTUATOR MARKING

	Area A	Area M	Area B
<b>Orientation</b>	<b>Symbols</b>		
<p><b>N</b></p> <p><b>O</b></p> <p><b>S</b></p> <p><b>E</b></p>			

Symbols & Accessories : see end of section D.




**NOTICE** : please note that not all combinations of above numbers are available. Refer to the following pages for further information.


# KR series

## Power rocker switches

Case

- To order case only (without rocker), finish your order number with the LED wiring code.






		2-3 5-6	1-2 4-5	
Single pole	Double pole			
<b>KR31</b>	<b>KR41</b>	ON - OFF		
	<b>KR44*</b>	ON ON ON		
	<b>KR44-1R*</b>	ON ON MOM		
<b>KR35</b>	<b>KR45</b>	MOM - ON		
<b>KR36</b>	<b>KR46</b>	ON - ON		
<b>KR37</b>	<b>KR47</b>	MOM OFF MOM		
<b>KR38</b>	<b>KR48</b>	ON OFF MOM		
<b>KR39</b>	<b>KR49</b>	ON OFF ON		


Bottom view

Contact area

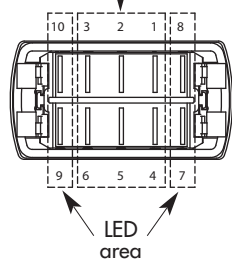

10 terminal version

Contact & LED area

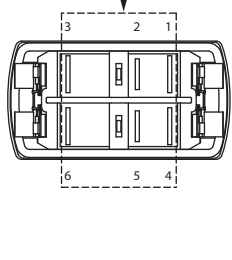




























6 terminal version

\* Function 4 : single pole in double pole case

### D ELECTRICAL FUNCTIONS AND CONNECTIONS

In the tables below, terminal connections as viewed from bottom of switch. Only the contact area is represented. For single pole models, only terminals 1, 2 and 3 are to be considered (not terminals 6, 5, 4).


x = w/o terminal  
o = with terminal  
▲ = momentary

	Positions				Positions		
							
Function 1 * KR31-KR41				Function 8 KR38-KR48			
Function 5 KR35-KR45				Function 9 KR39-KR49			
Function 6 KR36-KR46				Function 4 KR44			
Function 7 KR37-KR47				Function 4-1R KR44-1R			


\* Function 1 only available for 6 terminal versions.

### TERMINALS


CASE + LEDS




#### Screw





#### Solder lug / quick-connect

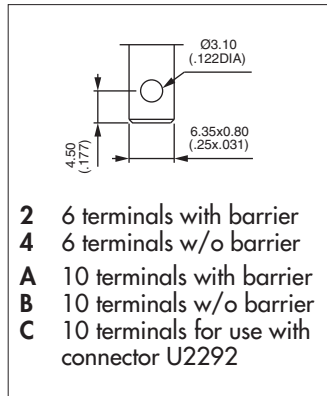

#### Normalized quick-connect 6,35x0,8

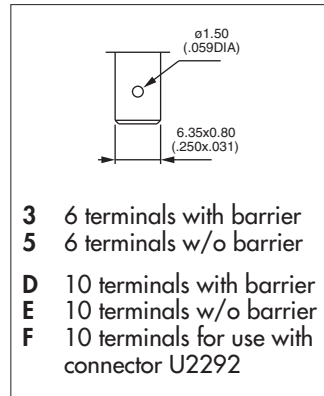

#### Normalized quick-connect 2,8x0,8

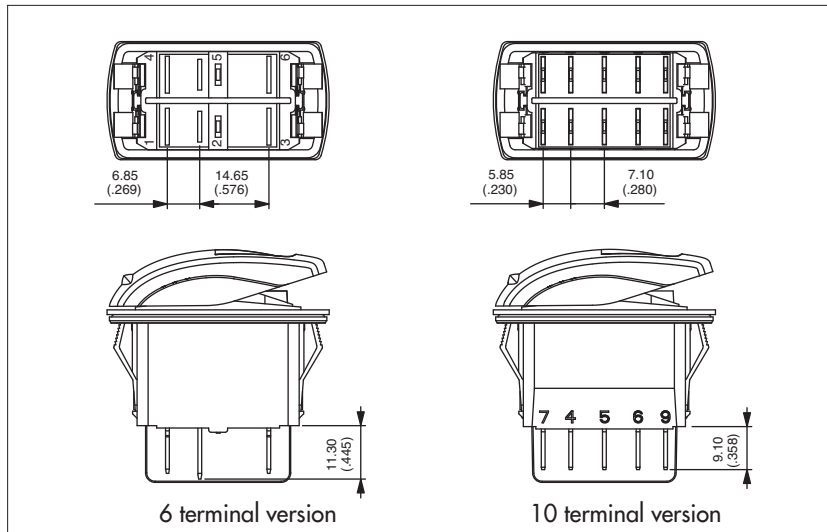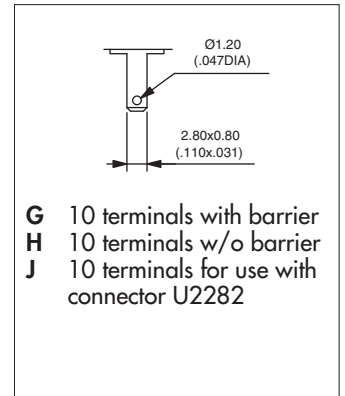


Terminals are marked on the case.

The drawings show the maximum possible number of terminals.

### CONTACT MATERIALS

CASE + LEDS




- A** Silver
- D** Silver, gold plated

# KR series

## Power rocker switches

Case - LEDs

### SEALING




**X** No sealing


**K** IP68 (switch assembled on panel)

Ultrasonic welding of frame to case is standard on all versions.  
The ultrasonic welding and the optional panel seal prevent water and dust from introducing into the switch housing.

*The product shall be installed professionally.  
Test conditions available on request.*

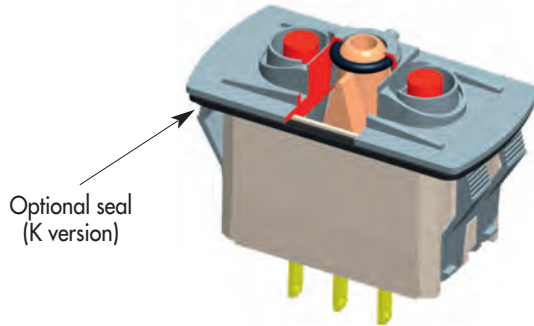

### LEDS

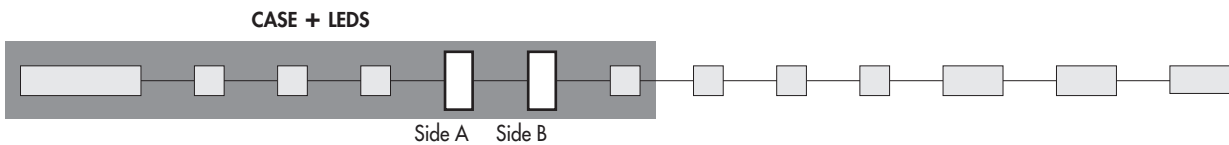


Complete each enlarged box with one of the codes listed below.

**X** Without LED

	Red	Green	Yellow	Blue	White	Red/green
6VDC	<b>A</b>	<b>B</b>	<b>C</b>	<b>M</b>	<b>R</b>	<b>1</b>
12VDC	<b>D</b>	<b>E</b>	<b>F</b>	<b>N</b>	<b>S</b>	<b>2</b>
24VDC	<b>J</b>	<b>K</b>	<b>L</b>	<b>P</b>	<b>T</b>	<b>3</b>
No resistor	<b>U</b>	<b>V</b>	<b>W</b>	<b>Y</b>	<b>Z</b>	<b>-</b>


LED consumption : 20mA @ nominal voltage (25°C)  
Other illumination solutions : on request.

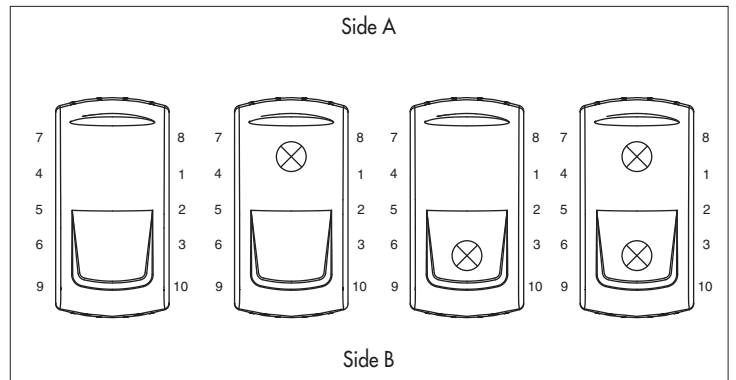

### WIRING




The LED wiring diagram is shown on the case.

#### CASE + LEDs






#### • For 6 terminal versions

LED connected to the load

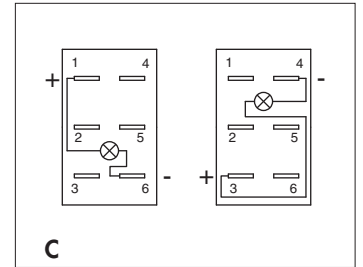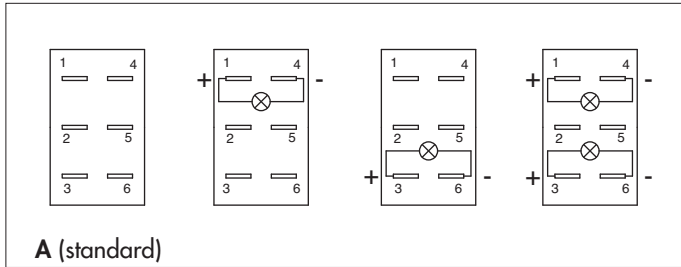


Note : If not available, terminals are added to connect the LED.

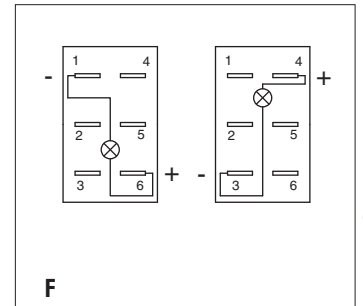


#### • For 10 terminal versions

Independent LED or integrated functions

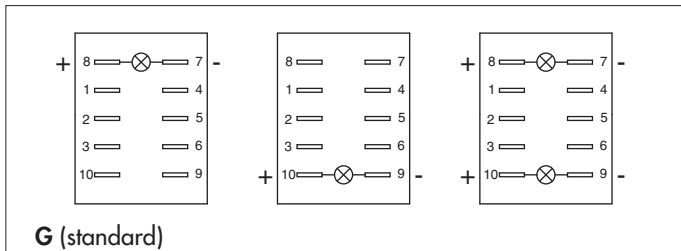

To have independent LEDs.

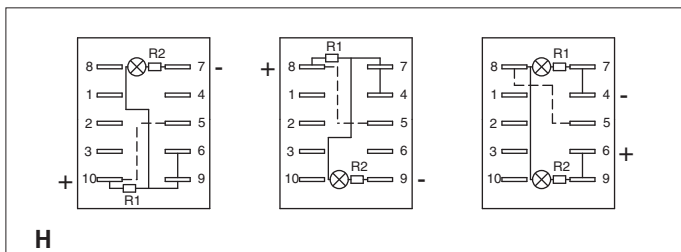

To obtain 2 symbol illumination levels (night illumination when OFF and higher illumination when ON).

H wiring with LED on side A available with functions 6, 8, 9 and 44.


H wiring with LED on side B available with functions 5, 6 and 9.

H wiring with 2 LEDs available with functions 8 and 9.

More information (H wiring schematics) : on request.

Dotted line = external wiring, continuous line = internal wiring

Available in Single Pole only, with H and J quick-connect terminals.

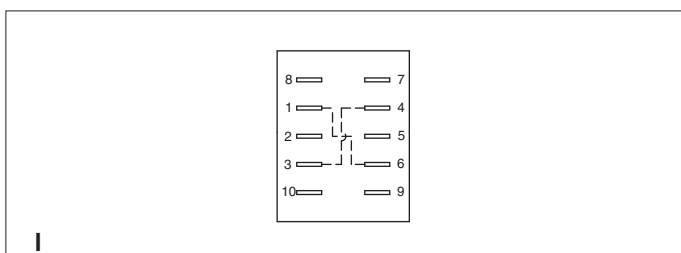

To have a polarity inversion (typical application : fan motor).

Dotted line = external wiring

Power supply between 2 and 5 - Load between 1 and 4 or 3 and 6. Available with H and J quick-connect terminals.

Please contact us for other wiring solutions.


# KR series

## Power rocker switches

### Actuator - Marking

To order actuator only (without case), begin the order number with code KRR, then follow the order format from "actuator type" until the end of the options.


#### ACTUATOR TYPE



- 1 For non-illuminated application
- 2 For illuminated application

Other rocker design : on request.

#### ACTUATOR COLOUR



Code	Colour
1	Blue
1/4	Dark blue
2	Black
3	Green

Code	Colour
4	Grey
5	Yellow
6	Red
7	Ivory

Code	Colour
7/1	White
9	Orange
A	Aluminium bright



Note : colours 7 and 7/1 not available on illuminated versions.

A **soft-touch varnish** can be added. Consult us.



#### MARKING ORIENTATION


If no marking required, complete the box with code N.

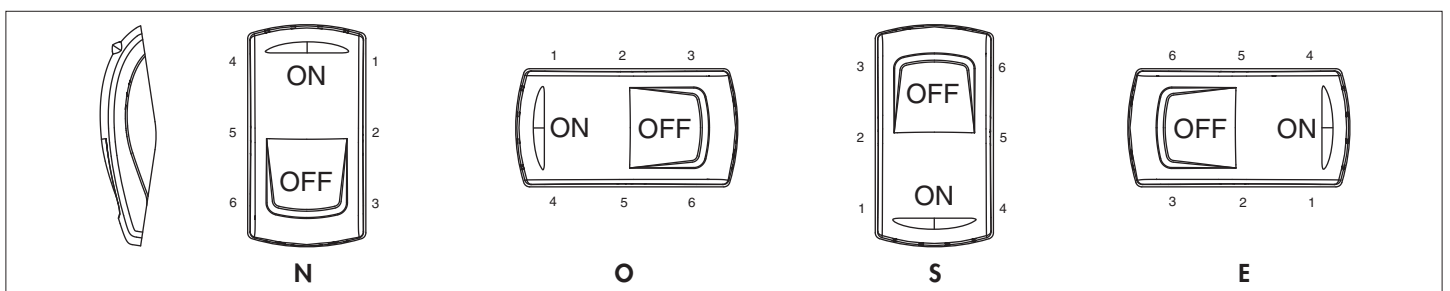

Other orientations : on request



### SYMBOLS



**XX** No symbol

**Available symbols** : see end of section D.

### Marking colour

White marking for illuminated rockers (laser etching) and non-illuminated black rockers (pad printing). Black marking for non-illuminated colour rockers (pad printing). Other : on request.



### Laser etching resistance

- Water and petrol resistant according to EN61058-1
- Tear resistant (cross-cut test) according to NF ISO 2409 : class 0
- UV resistant according to ISO 4892-2

### Marking area

For illuminated versions. The symbol will be included in the hatched area.


Marking in M area : on request.

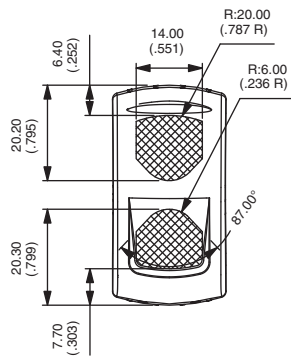




### SWITCH PANEL CUT-OUT

Panel thickness : 0,8 mm to 4,6 mm

Recommended panel thickness :  
between 2 mm and 3,5 mm



### MATRIX MOUNTING

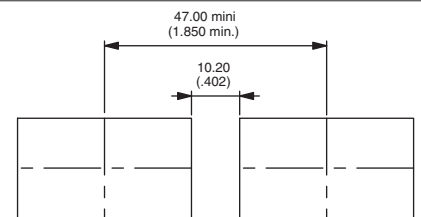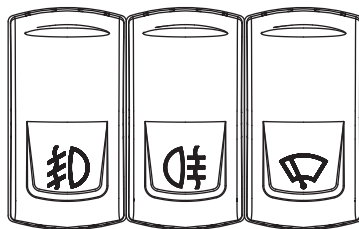

# K range

## Power rocker switches and indicators

### Symbols

UG1410A

Most symbols meet the ISO 7000 standard "graphical symbols for use on equipments" (code given in bracket in the description). Contact us for symbols not featured in the following tables.

#### Legend scale :

KR series : 1:1

KL, KG and KI series : depending on space available on the product (see "Symbols" section at the end of each series).









































CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION
XX	None	-	16		Revolving light	32		Emergency first aid vehicle (2565)
01	ON	-	17		Rear ventilator	33		Load tipping (1557)
02	OFF	-	18		Heating (0637)	34		Loading light (2457)
03	○	-	19		Door opening	35		Tractor, rear-ward (1667)
04	I	-	20		Windshield demister/defroster (0635)	36		Combine, direction of movement (1678)
05	II	-	21		Windshield wiper (0086)	37		Use no forks (2406)
06	STOP	-	22		Windshield washer (0088)	38		Transmission (1166)
07	A	Stop	23		Ventilator fan (0089)	39		Working spot light (1145)
08	M	Motion	24		Side mirror defroster	40		Engine (0640)
09		Up motion	25		Restarting pump	41		Horn (0244)
10		Down motion	26		Front fog lights (0633)	42		Lock (1656)
11		Hot	27		Rear fog lights (0634)	43		Taxi sign light (2551)
12		Cold	28		Propulsion system trim	44		Working light (1204)
13		Hazard warning (0085)	29		Beacon (1141)	45		Working light symmetric (1204)
14		Traveller lighting	30		Anchor	46		-
15		Driver lighting (1421)	31		Electric motor (0011)	47	ASM	-

Most symbols meet the ISO 7000 standard "graphical symbols for use on equipments" (code given in bracket in the description). Contact us for symbols not featured in the following tables.

**Legend scale :**

KR series : 1:1

KL, KG and KI series : depending on space available on the product (see "Symbols" section at the end of each series).

CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION
48		All wheel drive	64		Indicator	80		Front windshield heating
49		Differential lock (1662)	65		Brake release	81	AUS	Aus
50		-	66		Baggage room left door	82		Radiator fan
51		-	67		Baggage room right door	83		Remove retarder
52		-	68		Power blinds	84		Restricted speed
53	N	-	69		Engine idle control	85		Preheater
54		Rear window wiper (0097)	70	CRUISE RES/SET	Cruise res/set	86		ABS detection
55		Rear window washer (0099)	71		Driver windows up/down	87		ECAS detection
56		Lower load (2223)	72		Middle door opening	88		Engine stop
57		Cab lock (1560)	73		Front door opening	89	CRUISE RES/CAN	Cruise res/cancel
58		Extraction	74		Lighting in baggage room	90		ECAS reset
59		Pumping in	75	CRUISE ON/OFF	Cruise on/off	91		Driver windows heating
60		Rear PTO (1572)	76	TV	TV	92	CRUISE SET+/SET-	Cruise set
61		Front PTO	77		Pump	93		Air bag up/down
62		Rockshaft down	78	WC	Toilet	94		Read lighting
63		Rockshaft up	79		Toilet decontamination	95		Lighting main switch

# K range

## Power rocker switches and indicators






































### Symbols




Most symbols meet the ISO 7000 standard "graphical symbols for use on equipments" (code given in bracket in the description). Contact us for symbols not featured in the following tables.

#### Legend scale :





KR series : 1:1

KL, KG and KI series : depending on space available on the product (see "Symbols" section at the end of each series).

CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION	CODE	SYMBOL	DESCRIPTION
96		Heating using water	AD		-	AV		-
97		Low beam	AE		-	AW		-
98		Position lights	AF		-	AY		-
99		Diesel acceleration	AG		Battery charging condition (0247)	AZ		-
A1		Manual mode	AH		Turn signals (0084)	B1	HIGH	-
A2		Clockwise cabin rotation	AJ		High beam (0082)	B2	LOW	-
A3		Anticlockwise cabin rotation	AK		Differential lock, bogie (2600)	B3		-
A4		-	AL		Brushing with a rotating brush (0070)			
A5		-	AM		Differential lock, transfer case 4x4 (2475)			
A6		Parking brake	AN		Loader bucket, float (1441)			
A7		-	AP		Loader bucket (1437)			
A8		-	AQ		Rear window washer & wiper (0098)			
A9		-	AR		Header Header drive (1579)			
AA		-	AS		Excavator/backhoe boom side shift (2091)			
AB		-	AT		Chemical water treatment (1851)			
AC		-	AU		Grapple skidder, single funct° boom (1762)			

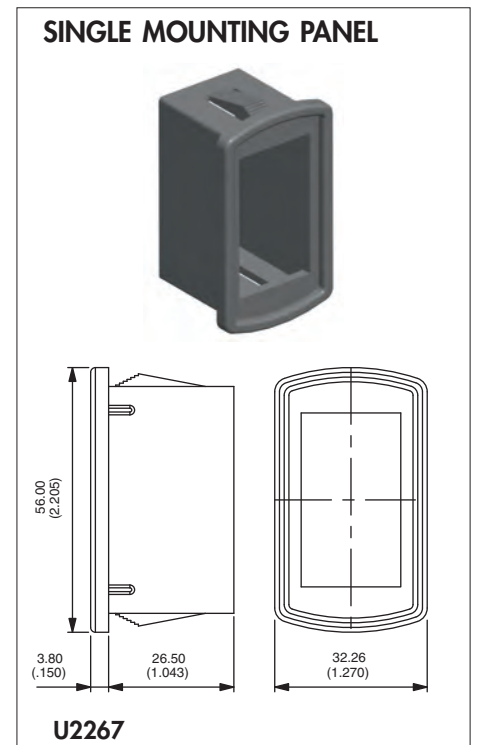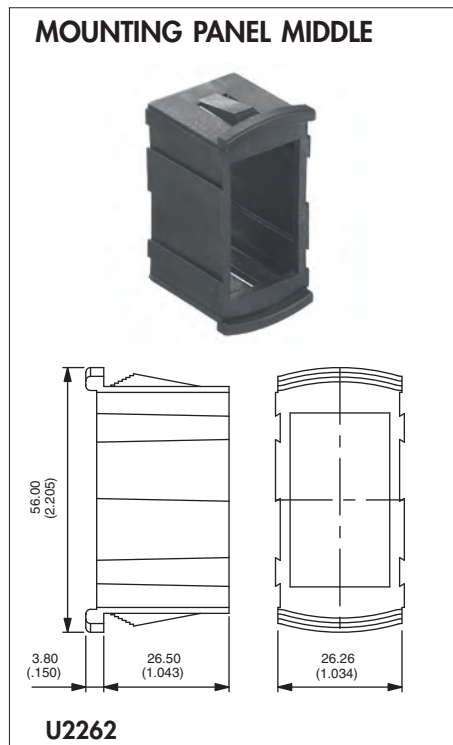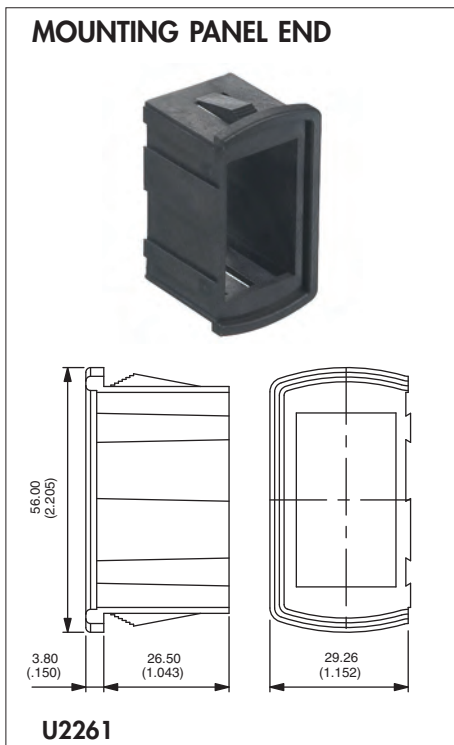

Recommended panel thickness : 1,10 mm - 1,80 mm - 2,60 mm - 3,40 mm - 4,20 mm - 5 mm - 5,80 mm

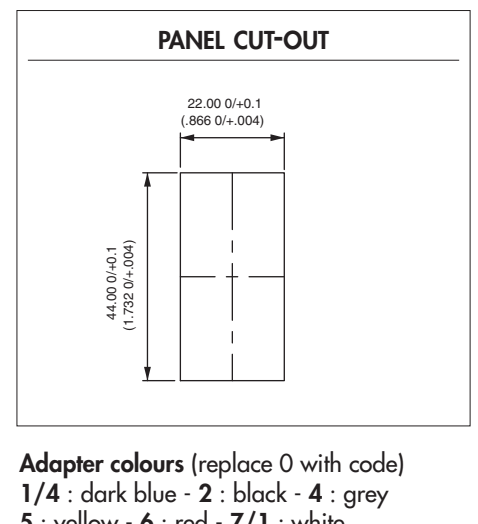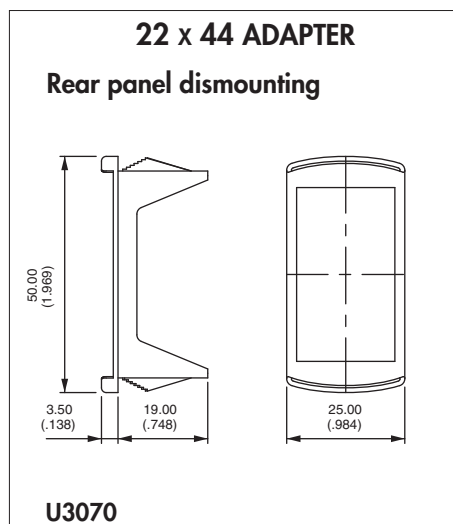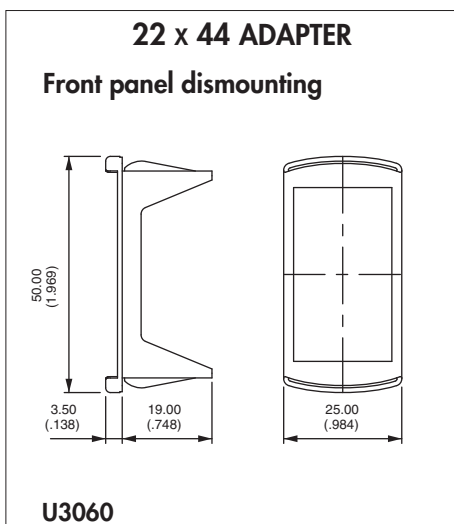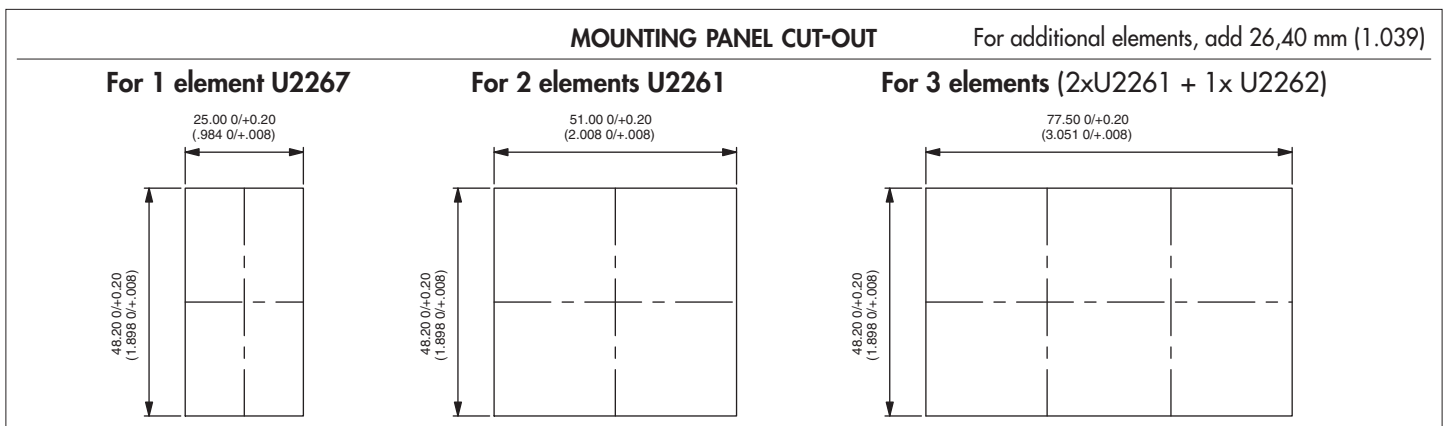

Recommended panel thickness : 0,60 mm to 1,50 mm

Recommended panel thickness : 1,60 mm -0,1/0 to 5,60 mm -0,1/0 in stages of 0,40 mm

# K range

## Power rocker switches and indicators

Accessories for KR, KL and KI series

### ACTUATOR REMOVING TOOL



U3052

2 tools are supplied

#### EXTRACT ACTUATOR (KR ONLY)

Allows the extraction of the rocker / rocker support assembly. Place the 2 claws under the support and push as indicated by the arrow.

#### EXTRACT ROCKER (KR ONLY)

Allows to separate the rocker from its support.

Insert the tool between rocker and support as indicated by the arrow. Pull out the tool in the opposite direction.

#### EXTRACT SWITCH (KR, KL AND KI)

Allows to extract switch from panel mounting units. 2 tools are necessary.

Insert the tools between switch and panel mounting units from the rear to compress the snap-in device. Pull off switch manually.

### CONNECTORS


Standard colour : black. Other colours : on request.  
Connectors cannot be combined with wiring types H and I.



U2260

#### 6 terminal version

For use with terminals type 2, 3, 4 or 5.  
6,35 (1/4) tabs to be fitted by the user  
(example : TE42282-2).  
Can be used for the KG series.

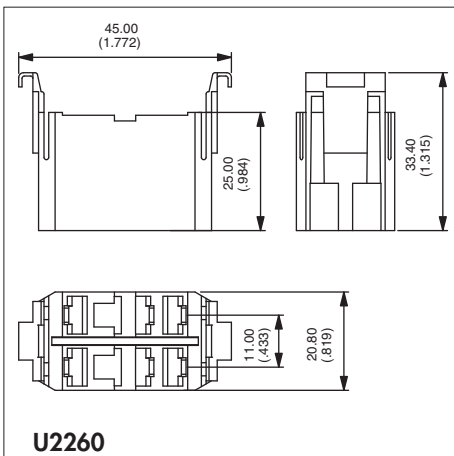


U2260



U2282

#### 10 terminal version

For use with terminals type H or J.  
2,8 (.110) tabs to be fitted by the user  
(example : AMP/Tyco 0-927779-3).

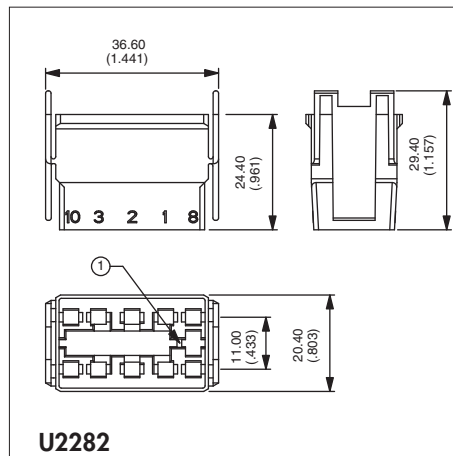


U2282



U2292

#### 10 terminal version

For use with terminals type B, C, E or F.  
6,35 (1/4) tabs to be fitted by the user  
(example : TE42282-2).

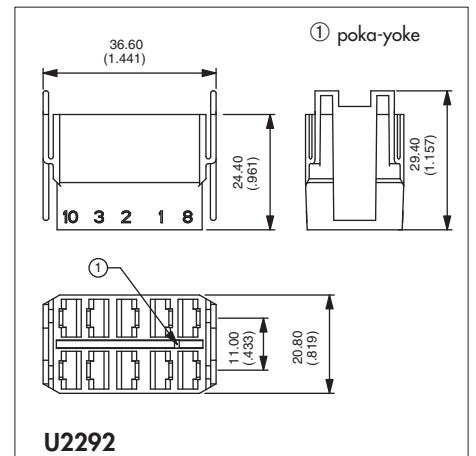

U2292

# K range

## Power rocker switches and indicators


Accessories for KR, KL and KI series

### HOLE PLUGS

Usefull for future extensions.

Code	Colour	Code	Colour
U2271	Blue	U2274	Grey
U2271/4	Dark blue	U2275	Yellow
U2272	Black	U2276	Red
U2273	Green	U2277	Ivory
		U2279	Orange

Recommended panel thickness :  
1,50 mm to 6 mm

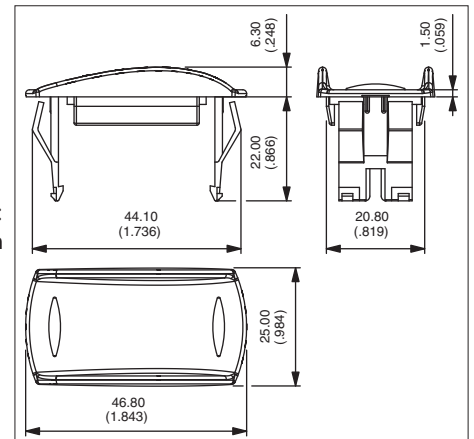

Connectors can be hanged on specific hole plugs. Contact APEM.